



LG150P Powered by Perkins

Model	Frequency/RPM	Standby Power	Prime Power
LG150P	60Hz/1800RPM	120KW	110KW
		150KVA	137.5KVA

* Voltages: 254/440V


- (1) Prime Power: Ratings are as per DIN 6271, BS55114 and ISO-3046 with 10% overload capacity.
- (2) Standby Power: Power available at variable load for up to a max. of 500 hours during one year of which 300 hours may be for continuous use.
- (3) Operation at Altitude \leq 1000m, Ambient temperature \leq 40°C. If altitude higher than 1000m, each 300m will cause additional de-rating 4%.

General Characteristics

Model	LG150P
Engine	Perkins 1106A-70TG1
Alternator	Stamford or Lega
Speed Control Type	Electrical
Phase	3
System Voltage	12
Frequency	60Hz
Engine Speed(RPM)	1800

Dimensions

DIMENSION	OPEN TYPE	SILENT TYPE
Length (L)	2400mm	3200mm
Width (W)	1000mm	1080mm
Height (H)	1600mm	2000mm
Net Weight (KG)	1400KG	2170kg

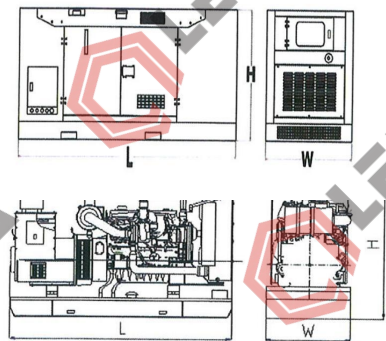

Engine Specification

Brand	Perkins	
Model	1106A-70TG1	
No. of Cylinders and Cycle	6L, 4 Stroke	
Compression Ratio	18.2:1	
Displacement (L)	7.01	
Bore x Stroke (mm)	105 x 135	
Piston Speed (m/s)	8.1	
Air Intake Flow (m ³ /min)	11.28	
Exhaust Flow (m ³ /min)	27.38	
Net Engine Weight (kg)	738.7	
Starting System	Electronic	
Engine Coolant Flow (L/min)	170	
Base Output Power (kW)	133.5	
Fuel Consumption (L/h)	110% load	38.8
	100% load	35.2
	75% load	26.5
	50% load	18
Fuel System	Minimum Pressure of Radiator Cap (kPa)	107
	Coolant capacity-engine only(L)	9.5
	Fuel injection pump model	Rotary
	Max. oil temperature permitted in oil pan (°C)	125
	Lubrication system Min. capacity (L)	12.5
Exhaust System	Max. Back Pressure (kPa)	6
Electrical System	Starter (V)	12
	Battery charging system (A)	65



Connection type (standard)	Series Star
Insulation	Class" H"
Enclosure (according IEC-34-5)	IP23

Exciter system		Self-excited
Voltage regulator		A.V.R. (Electronic)
Bracket type		Single bearing
Coupling system		Flexible disc
Coating type		Standard (Vacuum impregnation)

*Alternator meets BS EN 60034 and the relevant section of other international standards such as BS6000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2 and AS1350

Options

Engine

- Jacket Water Preheater
- Oil Preheater

Generator Sets

- Tools with the machine

Fuel System

- Low fuel level alarm
- Automatic fuel feeding system
- Fuel T-valves

Control Panel

- Remote control panel
- ATS
- Remote controller
- Synchronizing controller

Alternator

- Winding temperature measuring instrument
- Alternator Preheater
- Anti-damp and anti-corrosion treatment
- Anti-condensation heater

Canopy

- Rental type canopy

Exhaust System

- Protection board from heat

Cooling System

- Front heat protection
- Coolant (-30°C)

Lubricating System

- With machine oil

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your



Standard Controller (ComAp AMF20 or DEEPSEA DSE6020)

Control

- Auto/Start/Stop Control
- Emergency Stop Pushbutton/ Alarm
- Engine Cool Down Timer
- Warm - up Timer
- Load Switching Timer



Operating Hours
3 Phase Generator Voltage Sensing & Monitoring
Current Protection & Monitoring
Power Measurement (kW, kVA, kVAr, kWh, kVAh, pf)
Frequency Monitoring (Hz)
Oil Pressure/Coolant Temperature/Fuel Level Monitoring
Battery Voltage Monitoring (DC)
Alarm (Acknowledge)



AMF IntelliLite 9

Indications



DSE6020

Warning & Shutdown Alarms


Generator Over/Under Voltage & Frequency
Crank Disconnect (Failure to Start)
Under/Over Speed
Over Current
Low oil pressure
High Water Temperature
Low Fuel Level

Low Water Level

Features

IP 65 (if ordered with gasket)
Basic Scheduler
8 - 35V DC Supply
Digital Inputs(4) - Outputs(4 MPU/ 6 CAN)
Event Log (5 shutdowns)

All data is subject to change without notice. Sorry for inform.



Distributed By:

Fujian Everstrong Lega Power Equipments Co., Ltd
Fuqing Hong Kuan Industry Zone, Fuzhou, Fujian
Province, China
Tel: +86-591-8385 3032
Fax: +86-591-8385 3130
Email: sales@legapower.com
Web: www.legapower.com