

### Features

- Flicker free
- High efficiency; high PF
- Noiseless working
- Current + CCT adjustable
- IP20
- 5-year warranty (please refer to the warranty condition)



### Applications


· Indoor office lighting · decorative lighting · commercial lighting

### Descriptions

LF-FMR080CS(S1) is a 80W constant current LED driver. Its input voltage ranges from 220 to 240Vac and output current is adjustable from 200 to 550mA via DIP switch with every 50mA as a step. There is another DIP switch for adjusting CCT with 3 modes. It is suitable for Class I light fixtures, including tri-proof light, linear light, etc.

### Product Model

LF - F MR 080 CS(S1)

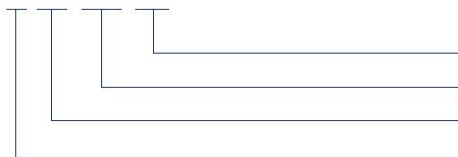

- CS: current + CCT adjustable; S1: distinction number
- 080: output power: 80W
- MR: indoor metal casing tri-proof light
- F: non-isolated design

### Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.  
 Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.  
 Website: [www.lifud.com](http://www.lifud.com) Telephone: +86(0)755 8373 9299 Email: [sales@lifud.com](mailto:sales@lifud.com)

■ **Electrical Characteristics**

Model		LF-FMR080CS (S1)						
<b>Output</b>	Output Voltage	54-230V			54-200V	54-177V	54-160V	54-145V
	Output Current	Adjustable via DIP switch (optional)						
		200mA	250mA	300mA	350mA	400mA	450mA	500mA
	Ripple Current (<100Hz)	±5%						
	Flicker Index	Complies with IEEE Std 1789-2015						
	CIE SVM	≤0.4						
	IEC-Pst	≤1						
	Current Tolerance	±5%						
	Temperature Drift	±10%						
Start-up Time	<0.5S							
<b>Input</b>	Input Voltage	220-240Vac						
	Input Voltage Range	198-264Vac						
	DC Input Voltage	180-264Vdc <sup>①</sup>						
	Input Frequency	0/50/60Hz						
	Input Current	0.55A max.						
	PF	≥0.95						
	THD	<15%						
	Efficiency	≥94%				≥93%		
	Inrush Current	≤45A <sup>②</sup>						
	Loading Quantities of Circuit Breaker	Model	B10		C10		B16	
Quantity (pcs)		11		13		19		22
Leakage Current	≤0.7mA							
<b>Protection Characteristics</b>	Open Circuit	<250Vdc						
	Short Circuit	Auto-recovery						
<b>Environment Descriptions</b>	Operating Temperature	-30°C - +60°C						
	Operating Humidity	20-95%RH (no condensation)						
	Storage Temperature/ Humidity	-30°C - +80°C (6 months in Class I environment); 10-95%RH (no condensation)						
	Atmospheric Pressure	86-106kPa						

■ **Electrical Characteristics**

<b>Surge</b>	L-N	1kV
	L/N-PG	2kV
<b>Safety &amp; EMC</b>	Certifications	ENEC, CE, CB, UKCA, RCM, EL, CCC, EAC
	Withstand Voltage	I/P-PG: 1.6kV&5mA&60S
	Insulation Resistance	I/P-PG: >100MΩ@500Vdc; O/P-PG: >100MΩ@500Vdc
	Safety Standards	CB: IEC61347-1:2015, IEC61347-1:2015/AMD1:2017, IEC61347-2-13:2014, IEC61347-2-13:2014/AMD1:2016 CCC:GB 19510.1-2009, GB 19510.14-2009 CE-LVD: EN 61347-2-13:2014/A1:2017, EN 61347-1:2015/A1:2021 EL:EN IEC 61347-2-13 Annex J ENEC: EN 61347-2-13:2014/A1:2017, EN 61347-1:2015/A1:2021, EN IEC62384 :2020 UKCA-LVD:EN 61347-1:2015/A1:2021, EN 61347-2-13:2014/A1:2017 EN 62493:2015
	EMI	CE-EMC/RCM:EN55015, EN61000-3-2, EN61000-3-3 UKCA-EMC:EN IEC 55015:2019/A11:2020, EN 61547:2009, EN IEC 61000-3-2:2019/A1:2021, EN 61000-3-3:2013/A2:2021 EL:EN IEC 61347-2-13 Annex J CCC:GB/T17743, GB17625.1, GB17625.2
EMS	CE-EMC/RCM: EN61000-4-2,3,4,5,6,11 CCC:GB/T17626.2,3,4,5,6,11	
<b>Other Parameters</b>	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Tc Max	90°C
	Warranty	5 years <sup>③</sup>
<b>Test Equipment</b>	AC power source: CHROMA6530, digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber, lightning surge generator: Everfine EMS61000-5B, rapid group pulse generator: Everfine EMS61000-4A, spectroanalyzer: KH3935, hi-pot tester: EEC SE7440, flicker tester (flicker-free coefficient test): Everfine LFA-3000, etc.	
<b>Test Remark</b>	If there are no special remarks, the above parameters are tested at the ambient temperature of 25°C, humidity of 50%, maximum output power and input voltage of 230Vac/50Hz.	

**Lifud Technology Co., Ltd.**


Production Base I (HQ): Building B, Kutto Industrial Park, NO.26 Xinhe Road, Bao'an District, Shenzhen, China.  
 Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Zone, Tianfu New Area, Sichuan, China.  
 Website: www.lifud.com Telephone: +86(0)755 8373 9299 Email: sales@lifud.com

■ **Electrical Characteristics**


<b>Additional Remarks</b>	<ol style="list-style-type: none"> <li>1. It is recommended that user install the over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety.</li> <li>2. The LED driver used in combination with the end device is one of the accessories of the whole light fixture, and the EMC of the whole light fixture is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC of the whole light fixture before the whole light fixture is finished.</li> <li>3. The test conditions of the circuit breaker configuration quantity are the same as those of the inrush current.</li> <li>4. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above.</li> <li>5. It is well-advised that the withstanding voltage of LEDs and aluminum substrates &gt;3kV.</li> <li>6. It is recommended to install double-pole switch at AC input terminal. If user uses the single-pole switch, make sure to connect it to wire L (live wire), otherwise the afterglow of light fixture would be incurred after the AC is disconnected.</li> <li>7. There exists stray capacitance between LED light fixture and aluminum substrate, and the light fixture will have transient slight brightness the moment the mains is connected and the aluminum substrate is connected to the earth (the whole light fixture connected to the earth). This is of no abnormalities for a non-isolated LED driver. And if the above issue needs to be avoided, please replace the non-isolated with the isolated.</li> <li>8. The light panel, fixed bracket and driver grounding should be secure.</li> </ol> <p>Note:</p> <ul style="list-style-type: none"> <li>① DC input is only for emergency with the maximum using time of 90 mins</li> <li>② @180uS</li> <li>③ 5 years@Tc≤81°C</li> </ul>
---------------------------	---

■ **Product Characteristic Curves**

Working Window Curve

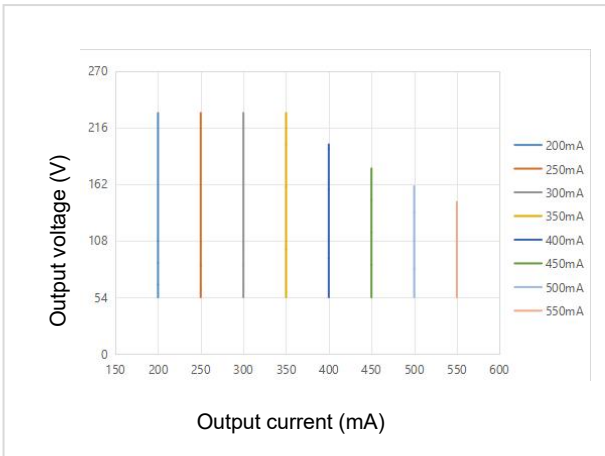


Efficiency Curve

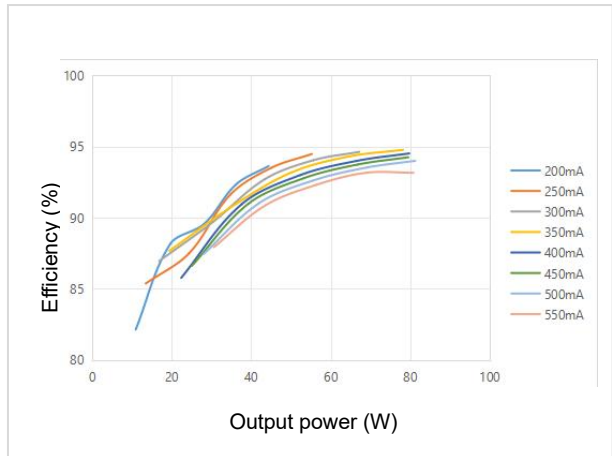


■ **Product Characteristic Curves**


PF Curve

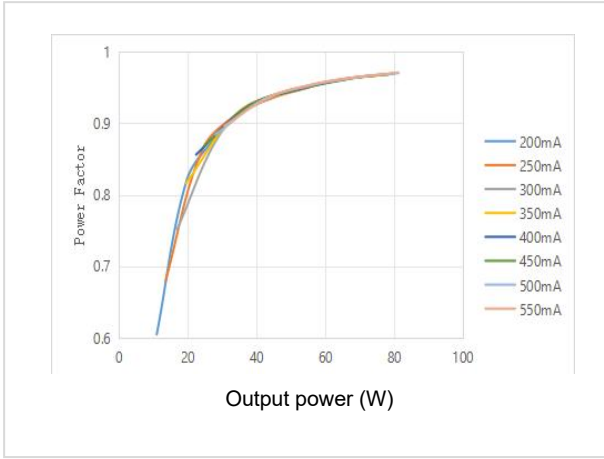


THD Curve

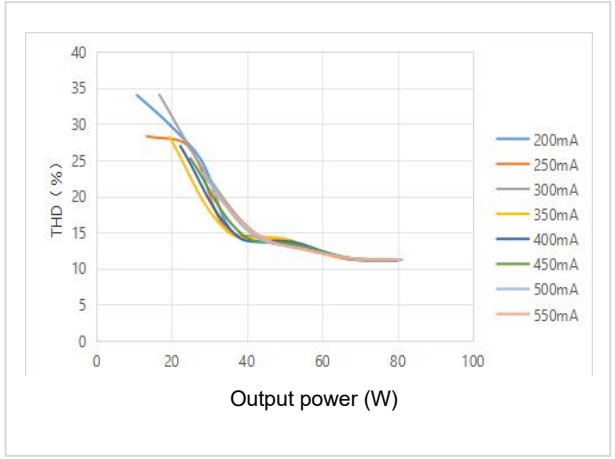

Lifetime Curve

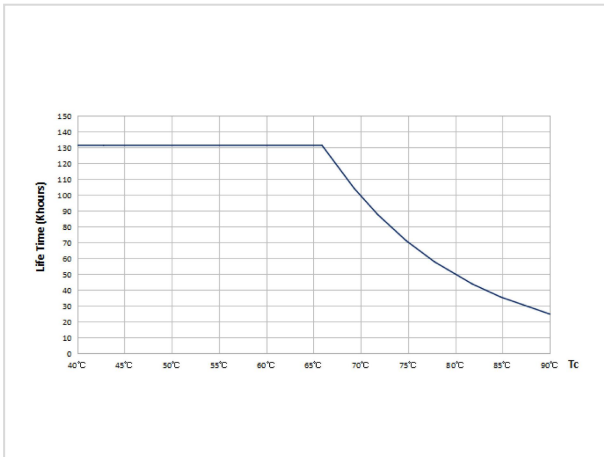

Tc Point Testing Diagram

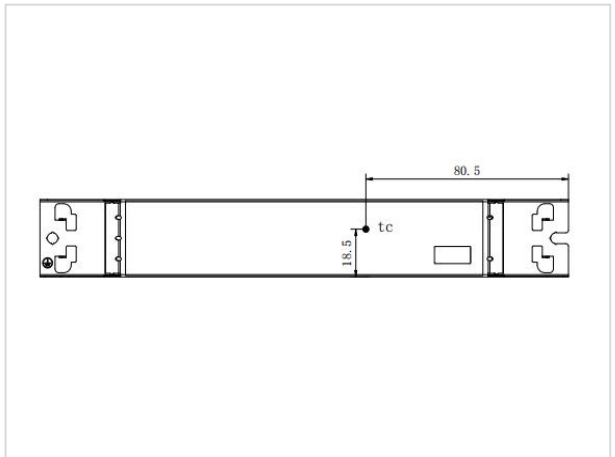

■ **Product Definitions**

Product Terminal

INPUT	
AC-L	AC live wire input
AC-N	AC neutral wire input
	Earth wire

OUTPUT	
LED+	Positive electrode output of LED driver
LED WW-	Negative electrode output of LED driver
LED CW-	Negative electrode output of LED driver

■ **Product Definitions**

Product DIP Switch

I rated (CC)	1	2	3
200mA(54-230Vdc)	-	-	-
250mA(54-230Vdc)	-	-	ON
300mA(54-230Vdc)	-	ON	-
350mA(54-230Vdc)	-	ON	ON
400mA(54-200Vdc)	ON	-	-
450mA(54-177Vdc)	ON	-	ON
500mA(54-160Vdc)	ON	ON	-
*550mA(54-145Vdc)	ON	ON	ON

Remark: “-”: shift OFF. “\*”: default current. DIP when power on is NOT allowed. Please disconnect the AC power before DIP.

DIP Switch for CCT adjusting

Shift	
CW	LED CW-
NW	applicable to both LED CW- & LED WW-
WW	LED WW-


■ **Structure & Dimensions (unit: mm)**

Product Dimensions

Model	Overall Appearance (L*W*H)	Distance Between 2 Positioning Holes (L)	Diameter of Positioning Hole (D)
LF-FMR080CS (S1)	210*30*22.6mm (±0.5mm)	200mm (±0.2mm)	4.2mm

■ **Structure & Dimensions (unit: mm)**

Structure Diagram

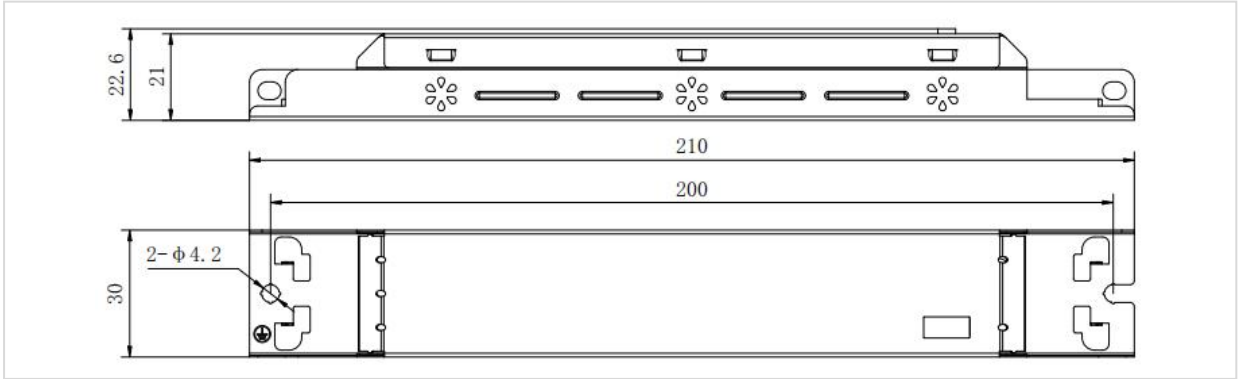

■ **Packaging Specifications**

Model	LF-FMR080CS (S1)
Carton Size	385*285*210mm (L*W*H)
Quantity	12 pcs/layer; 5 layers/ctn; 60 pcs/ctn
Weight	0.15 kg ±5% /pc; 9.41 kg ±5%/ctn

■ **Transportation and Storage**

1. **Transportation**

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

2. **Storage**

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

**Cautions**

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Technology Co., Ltd. reserves the right to interpret any contents of this specification.