




TD-40.5/1600-31.5A(2338)

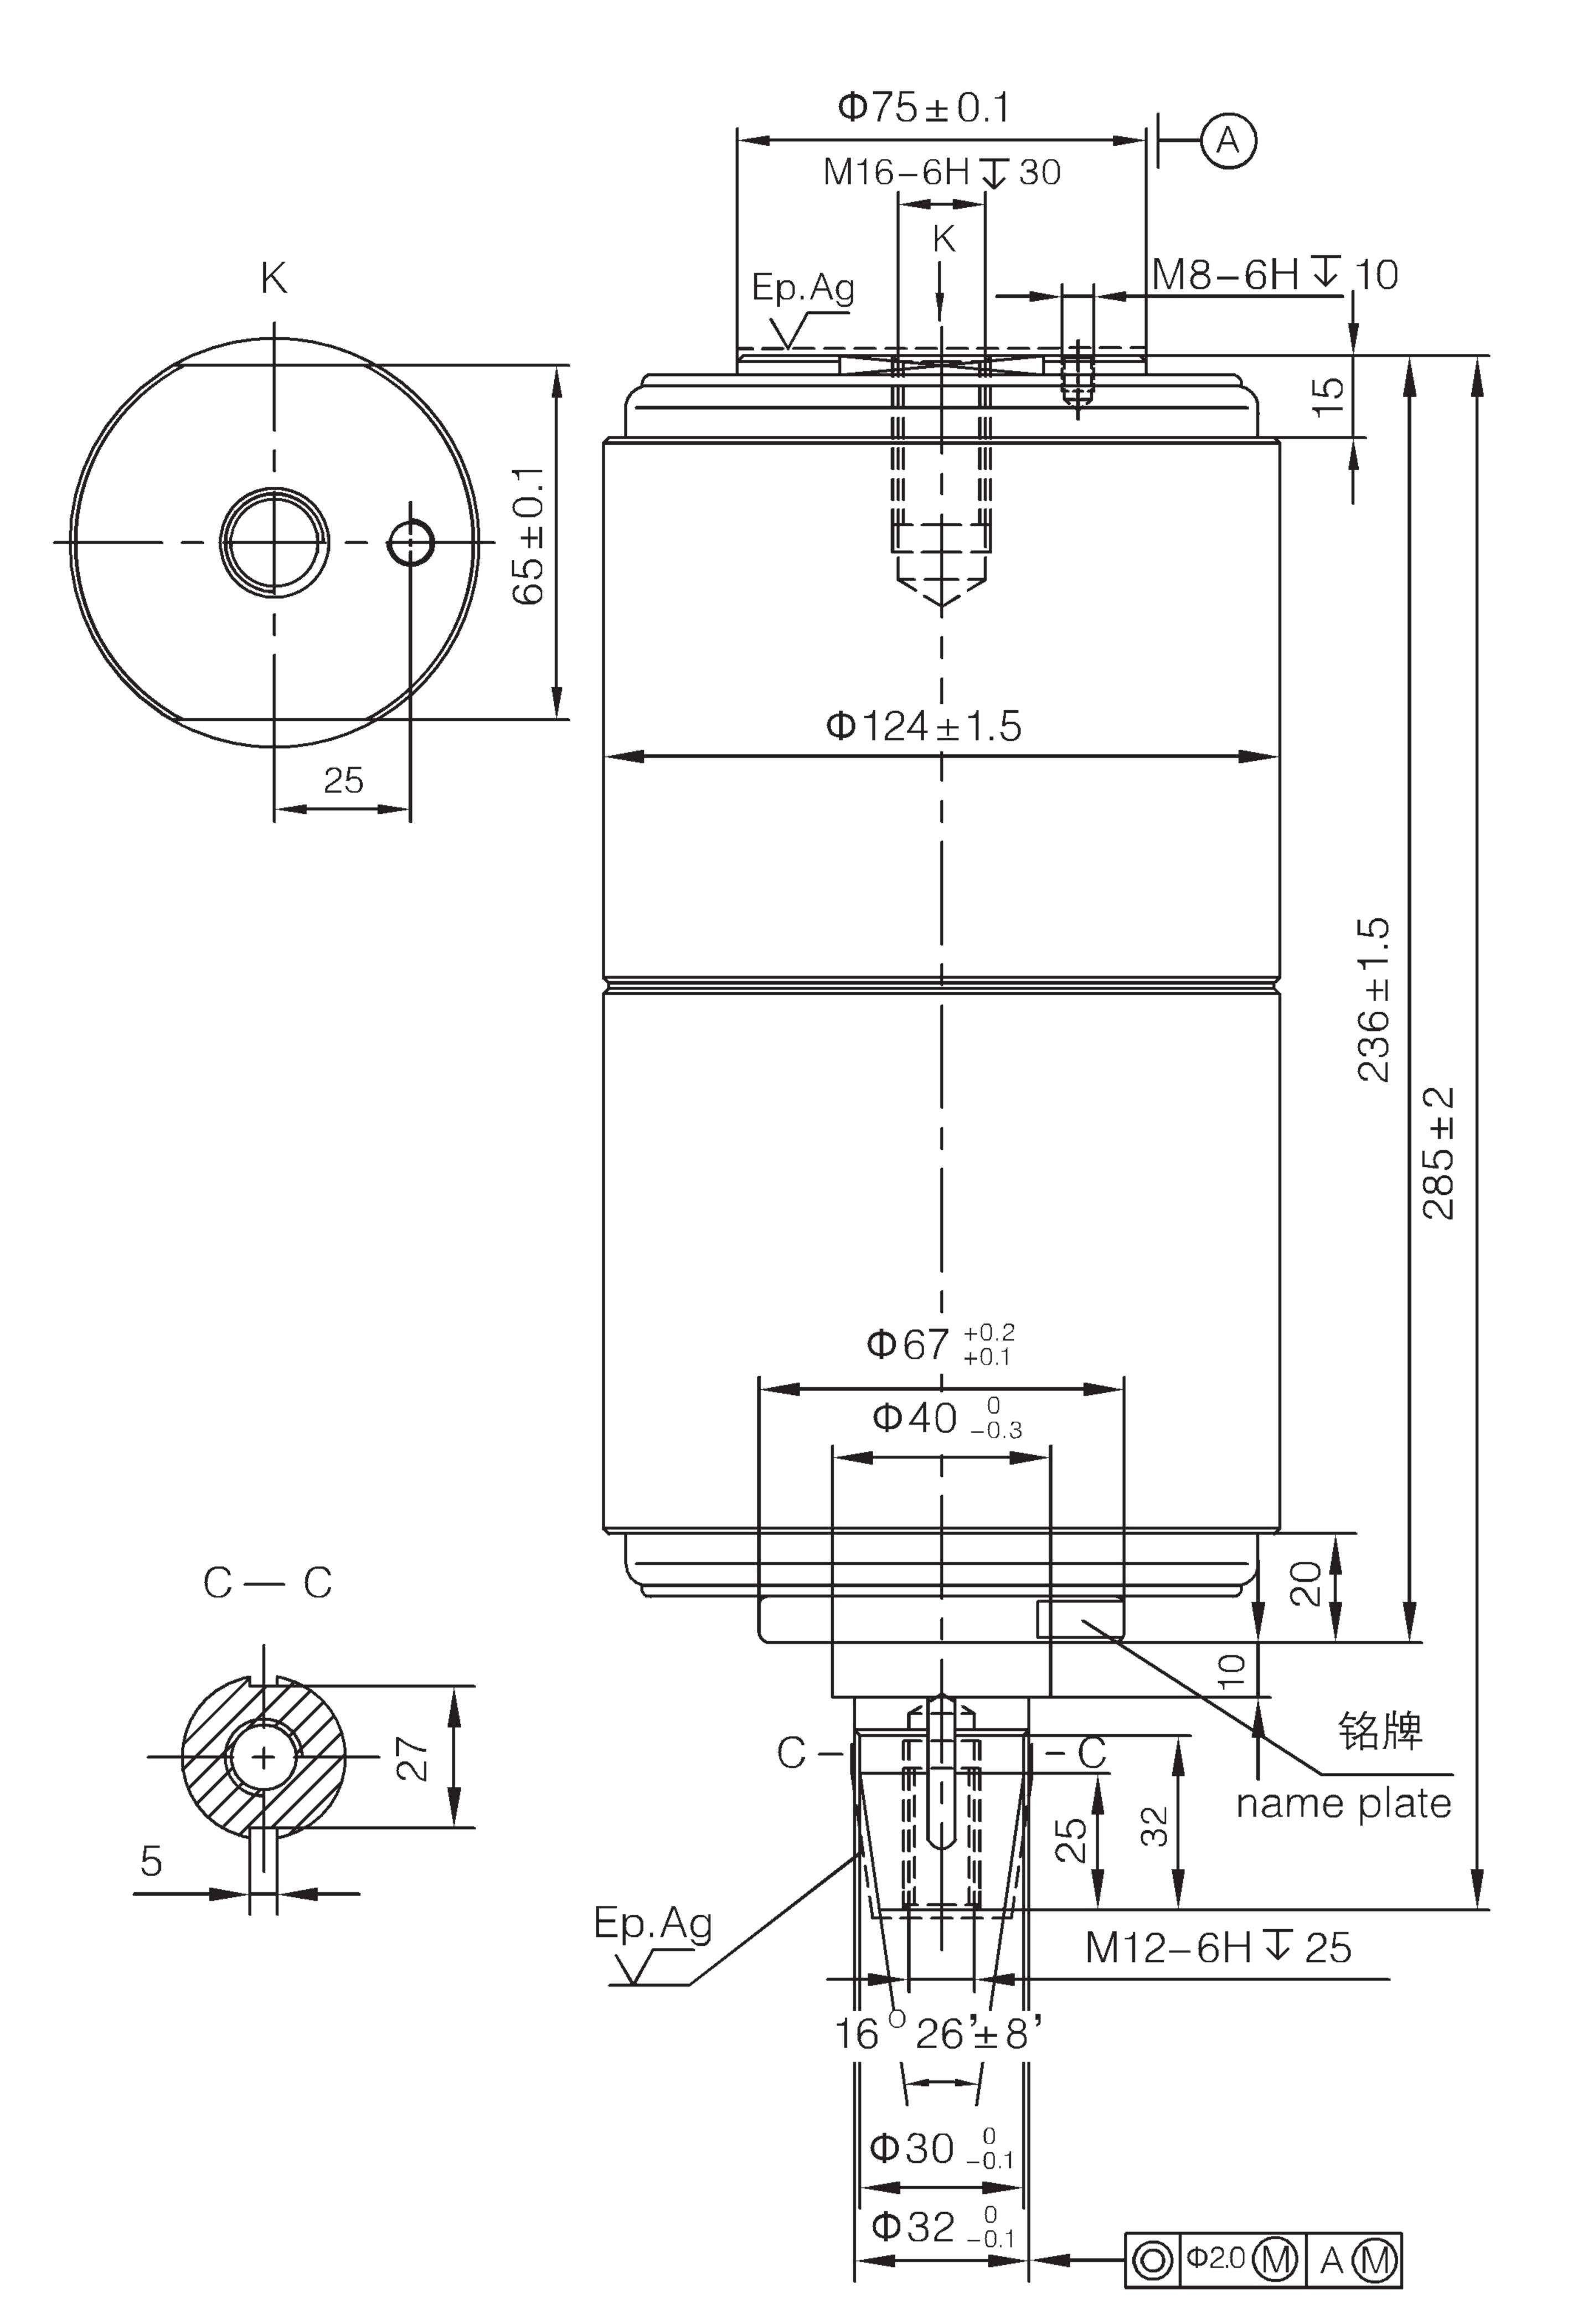

コココロコーキルルレスコー		
主要技术参数 (MAIN TECHI	NICAL D.	4TA)
参数名称 (Data)	单位 (Unit)	数值 (Value)
额定电压 Rated Voltage	kV	40.5
雷电冲击耐受电压(峰值) Lightning Impulse Withstand Voltage (Peak)	kV	185 ★
短时(1min)工频耐受电压 Short-time(1min) Power-frequency Withstand Voltage	kV	70/95 ★
额定频率 Rate Frequency	Hz	50/60
额定电流 Rated Current	Α	1600
额定短时耐受电流 Rated Short-time Withstand Current	kA	31.5
额定短路持续时间 Rated Duration of Short-circuit	S	4
额定峰值耐受电流 Rated Peak Withstand Current	kA	80
额定短路关合电流 Rated Short-circuit Making Current	kA	80
额定短路开断电流 Rated Short-circuit Breaking Current	kA	31.5
最大直流分量 Max. Dc component		40%
额定短路开断电流开断次数 Switch Operations of Rated Short-circuit Breaking Current	次 Operations	30
额定单个电容器组开断电流 Rated Single Capacitor Bank Breaking Current	Α	630 ※
额定背对背电容器组开断电流 Rated Back-to-back Capacitor Bank Breaking Current	A	400 ※
机械寿命 Mechanical Endurance	次 Operations	1000
触头开距 Clearance Between Open Contacts	mm	18 ± 1
触头自闭力 Contact Closed Force Due to Bellows and Atmosphere	N	110 ± 40
触头反力 Counterforce of Contact at Full Stroke	Ν	210 ± 40
额定触头压力下限时的回路电阻 Circuit Resistance at Min. Rated Contact Force	μΩ	≤ 20
触头允许磨损厚度 Contact Limit Erosion	mm	3
运动部分的质量 Mass of Moving Parts	kg	1.6
内部气体压力 Internal Pressure	Pa	$<1.33 \times 10^{-3}$
允许储存期 Shelf Life	年 Year	20
	秒 - 合分 - 18 0.3s - CO - 18	

配套的真空开关设备应满足的机械参数

MECHANICAL DATA OF VACUUM SWITCH EQUIPPED WITH THE INTERRUPTERS

参数名称(Data)	单位 (Unit)	数值 (Value)
平均分闸速度(0~12mm触头行程) Average Opening Speed (0~12mm contact travel)	m/s	1.7 ± 0.3
平均合闸速度(6mm~触头闭合) Average Closing Speed(6mm~ contact close position)	m/s	1.3 ± 0.3
触头合闸弹跳时间 Contact Bounce Duration at Closing Operation	ms	< 3
触头合闸和分闸不同期 Out of Simultaneity of Contact Closing and Opening	ms	< 2

参数名称 (Data)	单位 (Unit)	数值 (Value)
额定触头压力 Rated Contact Pressure	Ν	3200 +300
触头初压力 Contact Pressure at contact touch point	Ν	2400 +210
触头最大分闸反弹量 Max. rebound of contact at opening Operation	mm	3
触头分闸允许过冲 Overtravel during Opening	mm	< 3

注 1: "★"在变压器油中或等效绝缘介质中 Note1: "★"Within transformer oil or equivalent isolation medium

注 3: 产品符合或超过 IEC62271-100 以及 GB1984-2014 中 E2 级的要求

注 2: "※"为需要时提供的额定参数 Note2: "※"Rated characteristics to be given on request

Note3:Meets or exceeds the electrical endurance requirements of class E2 for IEC 62271-100 and GB1984-2014

注 4:真空灭弧室动导电杆上能承受的扭力矩 ≤ 45N.m,组装时应采取措施防止动导电杆转动,以避免损伤波纹管。具体使用要求见《安装使用说明书》。

Note4:The movable stem of the VI could only suffering no more than 45N.m twisting force and in order not to damage the metal bellows, the movable stem should be prevent from rotation when assembling. For more requirements please check the Instructions of Usage.