

# LG200C Powered by Cummins

Model	Frequency/RPM	Standby Power	Prime Power
LG200C	50Hz/1500RPM	160KW	146KW
		200KVA	182KVA

\* Voltages:230/400


- (1) Prime Power: Ratings are as per DIN 6271,BS55114 and ISO-3046 with 10% overload capacity.
- (2) Standby Power: Power available at variable load for up to a max. of 500 hours during one year of which 300 hours may be for continuous use.
- (3) Operation at Altitude  $\leq$ 1000m, Ambient temperature  $\leq$  40°C).If altitude higher than 1000m, each 300m will cause additional de-rating 4%.

## General Characteristics

Model	LG200C
Engine	Cummins 6CTA8.3-G1
Alternator	UCI274G
Speed Control Type	机械调速
Phase	3
System Voltage	24
Frequency	50Hz
Engine Sped(RPM)	1500
Controller Model	

## Dimensions

DIMENSION	OPEN TYPE	SILENT TYPE
Length (L)	2500mm	3500mm
Width (W)	925mm	1080mm
Height (H)	1650mm	2120mm
Net Weighl (KG)	1655kg	2240kg

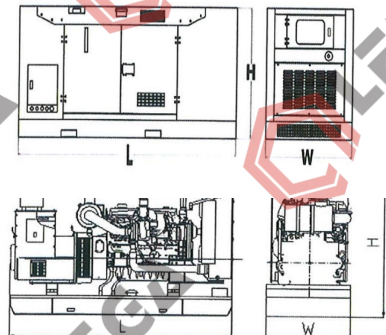

Engine Specification		
Brand	Cummins	
Model	6CTA8.3-G1	
No. of Cylinders and Cycle	6L, 4 Stroke	
Compression Ratio	17.3:1	
Displacement (L)	8.3	
Bore x Stroke (mm)	114*135	
Piston Speed (m/s)	6.8	
Air Intake Flow (L/s)	192	
Exhaust Flow (L/s)	521	
Net Engine Weight (kg)	637	
Starting System		
Engine Coolant Flow (L/s)	3.3	
Base Output Power (kW)	163	
Fuel Consumption (L/h)	110% load	48
	100% load	42
	75% load	31
	50% load	21
Cooling System	Max.coolant cycling resistance exterior engine(kPA)	28
	Thermostat adjusting temperature (°C )	82-95
	Minimum Pressure of Radiator Cap (kPA)	69
	Coolant capacity-engine only(L)	12.3
Fuel System	Fuel injection pump model	BYC A Direct Injection
	Maximum Restriction at Lift Pump (kPa)	27
	Maximum Fuel Inlet Temperature (°C )	71
	Total Drain Flow (constant for all loads) (L/h)	193
Lubricating System	Low idle (kPA)	103
	Rated speed (kPA)	276-414
	Max. oil temperature permitted in oil pan (°C )	121
Exhaust System	Lubrication system Min. capacity (L)	27.6
	Max. Back Pressure (kPA)	10
Electrical System	Starter (V)	24
	Battery charging system (A)	40

## Alternator Specification

Poles	No.	4
Connection type (standard)		Series Star
Insulation		Class" H"
Enclosure (according IEC-34-5)		IP23
Exciter system		Self-excited, brushless
Voltage regulator		A.V.R. (Electronic)
Bracket type		Single bearing
Coupling system		Flexible disc
Coating type		Standard (Vacuum impregnation)

\*Alternator meets BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2 and AS1359.

## Options

### Engine

- Jacket Water Preheater
- Oil Preheater

### Generator Sets

- Tools with the machine

### Fuel System

- Low fuel level alarm
- Automatic fuel feeding system
- Fuel T-valves

### Control Panel

- Remote control panel
- ATS
- Remote controller
- Synchronizing controller

### Alternator

- Winding temperature measuring instrument
- Alternator Preheater
- Anti-damp and anti-corrosion treatment
- Anti-condensation heater

### Canopy

- Rental type canopy
- Trailer

### Exhaust System

- Protection board from heat

### Cooling System

- Front heat protection
- Coolant (-30°C)

### Lubricating System

- With machine oil

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your



**Standard Controller (ComAp AMF20 or DEEPSEA DSE6020)**

Control	<ul style="list-style-type: none"> <li>Auto/Start/Stop Control</li> <li>Emergency Stop Pushbutton/ Alarm</li> <li>Engine Cool Down Timer</li> <li>Warm - up Timer</li> <li>Load Switching Timer</li> <li>Engine Cycle Crank</li> </ul>	
Indications	<ul style="list-style-type: none"> <li>Operating Hours</li> <li>3 Phase Generator Voltage Sensing &amp; Monitoring</li> <li>Current Protection &amp; Monitoring</li> <li>Power Measurement (kW, kVA, kVAr, kWh, kVAh, pf)</li> <li>Frequency Monitoring (Hz)</li> <li>Oil Pressure/Coolant Temperature/Fuel Level Monitoring</li> <li>Battery Voltage Monitoring (DC)</li> </ul>	AMF IntelliLite 9
Warning & Shutdown Alarms	<ul style="list-style-type: none"> <li>Alarm (Acknowledge)</li> <li>Generator Over/Under Voltage &amp; Frequency</li> <li>Crank Disconnect (Failure to Start)</li> <li>Under/Over Speed</li> <li>Over Current</li> <li>Low oil pressure</li> <li>High Water Temperature</li> <li>Low Fuel Level</li> <li>Low Water Level</li> </ul>	
Features	<ul style="list-style-type: none"> <li>IP 65 (if ordered with gasket)</li> <li>Basic Scheduler</li> <li>8 - 35V DC Supply</li> <li>Digital Inputs(4) - Outputs(4 MPU/ 6 CAN)</li> <li>Event Log (5 shutdowns)</li> </ul>	DSE6020

All data is subject to change without notice. Sorry for inform.

Distributed By:

Fujian Everstrong Lega Power Equipments Co., Ltd  
 Fuqing Hong Kuan Industry Zone, Fuzhou, Fujian  
 Province, China  
 Tel: +86-591-8385 3032  
 Fax: +86-591-8385 3130  
 Email: sales@legapower.com  
 Web: www.legapower.com



**We are always Available**