

LG10P

Powered by Perkins

Model	Frequency/RPM	Standby Power	Prime Power
LG10P	50Hz/1500RPM	8KW	7.2KW
		10KVA	9KVA

* Voltages: 230/400V


- (1) Prime Power: Ratings are as per DIN 6271, BS55114 and ISO-3046 with 10% overload capacity.
- (2) Standby Power: Power available at variable load for up to a max. of 500 hours during one year of which 300 hours may be for continuous use.
- (3) Operation at Altitude \leq 1000m, Ambient temperature \leq 40°C. If altitude higher than 1000m, each 300m will cause additional de-rating 4%.

General Characteristics

Model	LG10P
Engine	Perkins 403A-11G1
Alternator	Stamford or Lega
Speed Control Type	Mechanical
Phase	3
System Voltage	12
Frequency	50Hz
Engine Sped(RPM)	1500
Controller Model	AMF IntelliLite 9 or DEEPSEA DSE

Dimensions

DIMENSION	OPEN TYPE	SILENT TYPE
Length (L)	1480mm	1900mm
Width (W)	730mm	730mm
Height (H)	1270mm	1140mm
Net Weight (KG)	440KG	550KG

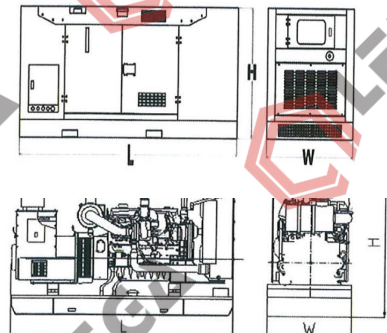

Engine Specification		
Brand	Perkins	
Model	403D-11G	
No. of Cylinders and Cycle	3L, 4 Stroke	
Compression Ratio	23.0:1	
Displacement (L)	1.131	
Bore x Stroke (mm)	77 x 81	
Piston Speed (m/s)	4.1	
Air Intake Flow (L/s)	11.7	
Exhaust Flow (L/s)	27.7	
Net Engine Weight (kg)	129.2	
Starting System	Electronic	
Engine Coolant Flow (L/s)	0.46	
Base Output Power (kW)	8.4	
Fuel Consumption (L/h)	110% load	2.9
	100% load	2.6
	75% load	2
	50% load	1.5
Cooling System	Max.coolant cycling resistance exterior engine(kPA)	TBA
	Thermostat adjusting temperature (°C)	75-87
	Minimum Pressure of Radiator Cap (kPA)	90
	Coolant capacity-engine only(L)	1.9
Lubricating System	Low idle (kPA)	120
	Rated speed (kPA)	350
	Max. oil temperature permitted in oil pan (°C)	125
	Lubrication system Min. capacity (L)	3.4
Exhaust System	Max. Back Pressure (kPA)	10.2
Electrical System	Starter (V)	12
	Battery charging system (A)	15

Alternator Specification

Poles	No.	4
Connection type (standard)		STAR
Insulation		Class" H"
Enclosure (according IEC-34-5)		IP23
Exciter system		self-excited system
Voltage regulator		A.V.R. (Electronic)
Bracket type		Single bearing
Coupling system		Flexible disc
Coating type		Standard (Vacuum impregnation)

*Alternator meets BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2 and AS1359.

Options

Engine

- Jacket Water Preheater
- Oil Preheater

Generator Sets

- Tools with the machine

Fuel System

- Low fuel level alarm
- Automatic fuel feeding system
- Fuel T-valves

Control Panel

- Remote control panel
- ATS
- Remote controller
- Synchronizing controller

Alternator

- Winding temperature measuring instrument
- Alternator Preheater
- Anti-damp and anti-corrosion treatment
- Anti-condensation heater

Canopy

- Rental type canopy
- Trailer

Exhaust System

- Protection board from heat

Cooling System

- Front heat protection
- Coolant (-30°C)

Lubricating System

- With machine oil

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your

Standard Controller (ComAp AMF20 or DEEPSEA DSE6020)

Control	<ul style="list-style-type: none"> Auto/Start/Stop Control Emergency Stop Pushbutton/ Alarm Engine Cool Down Timer Warm - up Timer Load Switching Timer Engine Cycle Crank 	
Indications	<ul style="list-style-type: none"> Operating Hours 3 Phase Generator Voltage Sensing & Monitoring Current Protection & Monitoring Power Measurement (kW, kVA, kVA_r, kWh, kVA_h, pf) Frequency Monitoring (Hz) Oil Pressure/Coolant Temperature/Fuel Level Monitoring Battery Voltage Monitoring (DC) 	AMF IntelliLite 9
Warning & Shutdown Alarms	<ul style="list-style-type: none"> Alarm (Acknowledge) Generator Over/Under Voltage & Frequency Crank Disconnect (Failure to Start) Under/Over Speed Over Current Low oil pressure High Water Temperature Low Fuel Level Low Water Level 	
Features	<ul style="list-style-type: none"> IP 65 (if ordered with gasket) Basic Scheduler 8 - 35V DC Supply Digital Inputs(4) - Outputs(4 MPU/ 6 CAN) Event Log (5 shutdowns) 	DSE6020

All data is subject to change without notice. Sorry for inform.

Distributed By:

Fujian Everstrong Lega Power Equipments Co., Ltd
 Fuqing Hong Kuan Industry Zone, Fuzhou, Fujian
 Province, China
 Tel: +86-591-8385 3032
 Fax: +86-591-8385 3130
 Email: sales@legapower.com
 Web: www.legapower.com



We are always Available