CHARACTERISTIC OF VALVE REGULATED FACTORY ACTIVATED LEAD ACID BATTERY

MODEL: YB12A-BS(MF)

NO. 301030005-00156

Container Optional Color

Black C

Plane Chart:

Unit:(mm) Terminal type:(Z1)

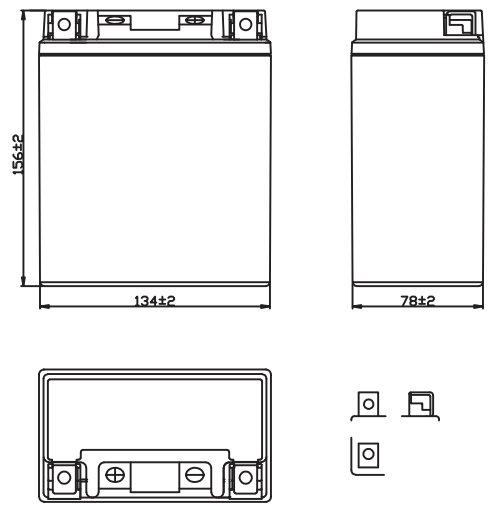

Parts:

Executed Standard JISD 5302 -2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safty Valve	Seal Glue
ABS	ABS	Pb	PbO2	Pb	AGM	dilute sulphuric acid	Rubber	Epoxy Resin

Parameter Chart:

Volts	12V	
Capacity (25°C)	10 hours rate	12Ah
Appx.Dimension (mm)	L±2	134
	W±2	78
	H±2	156
Storage Status	Wet	
Weight (Approx)	3.63Kg	

Retention of Charge Storage @25 ℃		
1 month	97%	Directly Mounted
3 month	90%	Directly Mounted
6 month	80%	Constant Volts:14.4V Limit Current:2.4A Charging Hours:2-3H
12 month	40%	Constant Volts:14.4V Limit Current:2.4A Charging Hours:4-6H

CCA	Factory Standard (-10° C)	Factory Standard (-18° C)
Discharging Current	100A	140A

★The above are average and data obtained from the firsr 3 charge/discharge cycles.These are not minimum values.

★The different item No.of battery can be developed according to the customer's demand.

Discharge Current 25℃

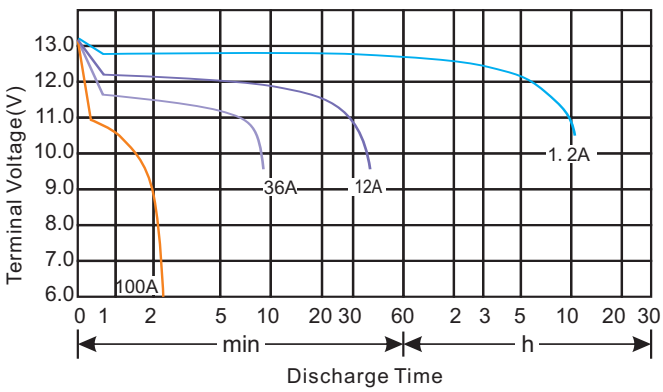

Residual Capacity

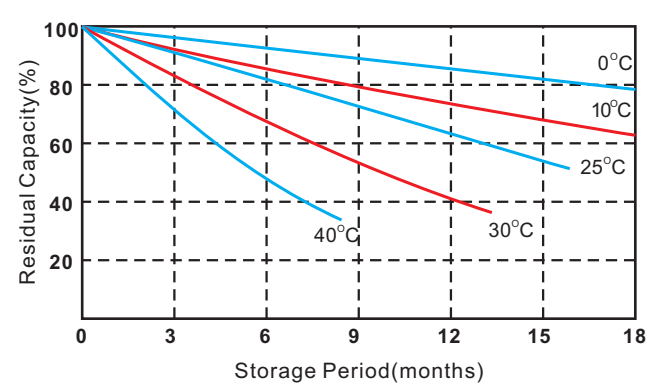

V202009