



MODEL: OT20-12 / CN

NO.: 302080001-00025

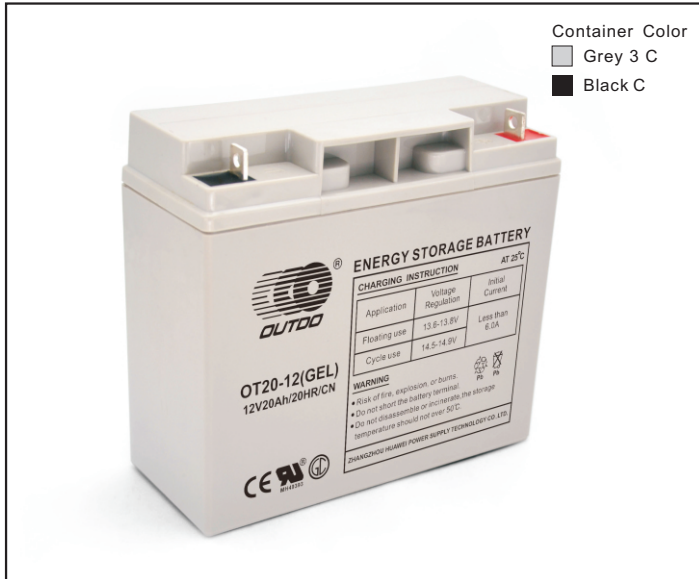

Plane Chart:


Unit:(mm) Terminal type:(L1)

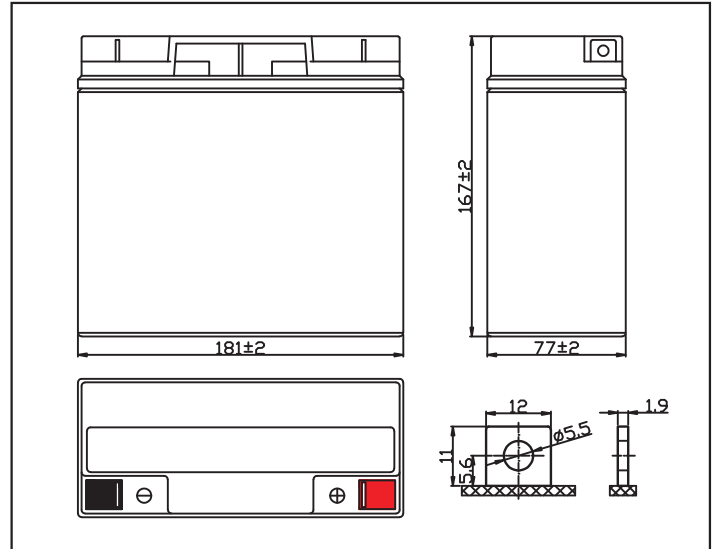


Parameter Chart:

Volts		12V	
Capacity(25°C)	20 hours rate (1A)	20Ah	
Discharge Current Testing (25°C)	1 hours rate (11A)	13Ah	
	3 hours rate (5A)	16.5Ah	
Internal Resistance	Full Charged Battery 25°C	11mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 6A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		6.08Kg	



Residual Capacity

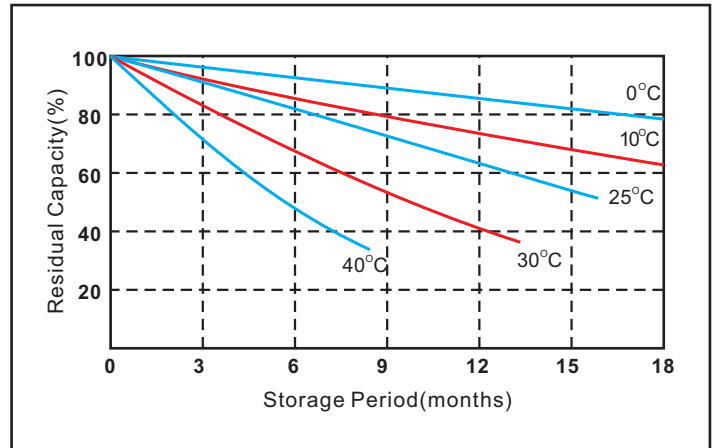

Discharge Current 25°C

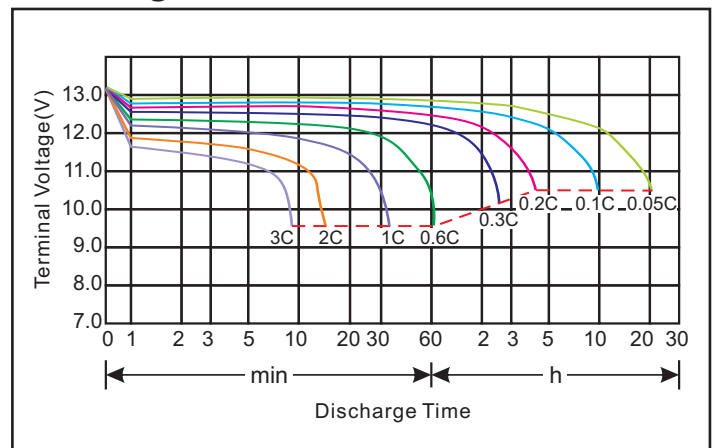

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

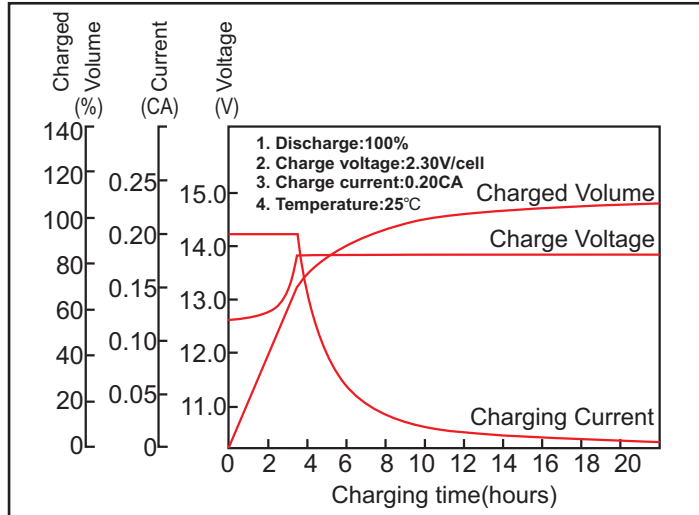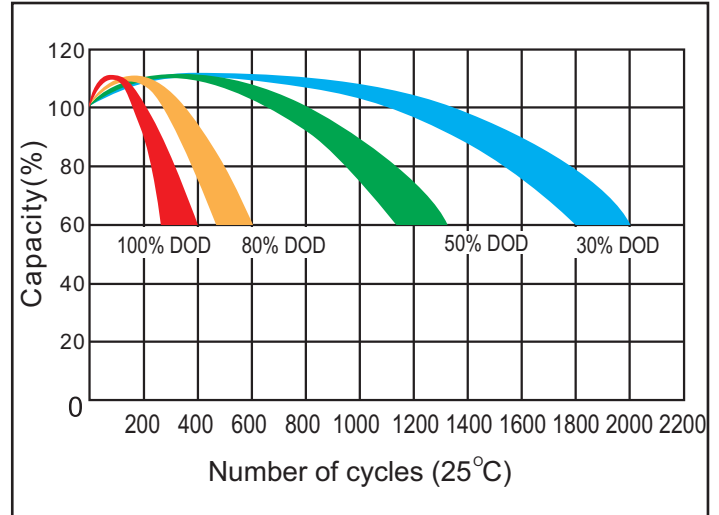MODEL: OT20-12 / CN
NO.: 302080001-00025
Constant voltage charging characteristics

Cycle service life in relation to the depth of discharge

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	82.5	54.2	41.3	23.7	14.7	7.62	5.62	3.63	2.41	1.97	1.05
10.2V	76.6	50.1	38.2	22.9	13.8	7.45	5.46	3.55	2.37	1.95	1.03
10.5V	74.3	47.9	36.9	22.2	13.5	7.38	5.35	3.49	2.35	1.93	1.02
10.8V	70.9	46.3	35.8	21.4	13.1	7.25	5.22	3.45	2.32	1.91	1.00

Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	891.0	590.8	454.3	265.4	167.6	87.6	65.2	42.5	28.4	23.2	12.5
10.2V	842.6	556.1	427.8	258.8	157.3	85.7	63.3	41.5	28.0	23.0	12.3
10.5V	824.7	536.5	417.0	253.1	155.3	86.3	62.6	41.2	28.0	23.0	12.1
10.8V	794.1	523.2	408.1	246.1	150.7	84.8	61.1	40.7	27.6	22.7	11.9

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.