



DIGITAL SCREEN INTELLIGENT GEL STORAGE BATTERY - GEL SERIES

MODEL: OT100-12(GEL)/DS-A


NO.: 302070066-00030



Container Color
 Grey 3 C

Plane Chart:


Unit:(mm) Terminal type:(T3)

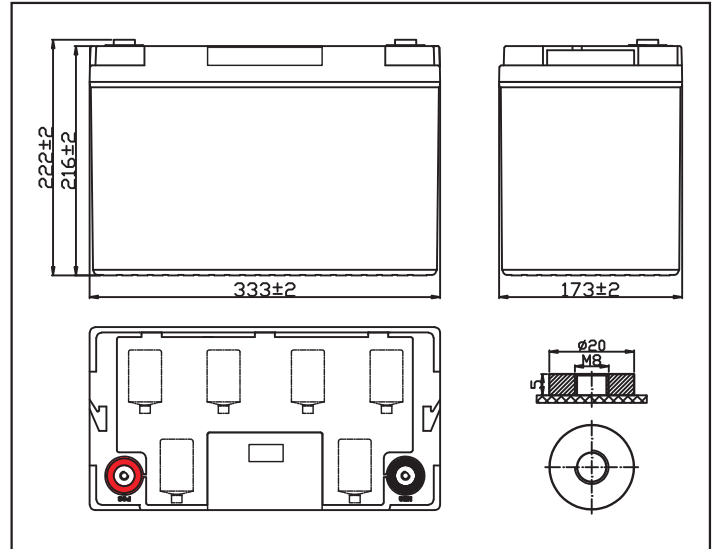


Parameter Chart:

Volts		12V	
Capacity(25°C)	10 hours rate (10A)	100Ah	
Discharge Current Testing (25°C)	1 hours rate (55A)	63Ah	
	3 hours rate (75A)	82Ah	
Internal Resistance	Full Charged Battery 25°C	5mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 30A Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	
Weight (Approx)		31.5Kg	



Residual Capacity

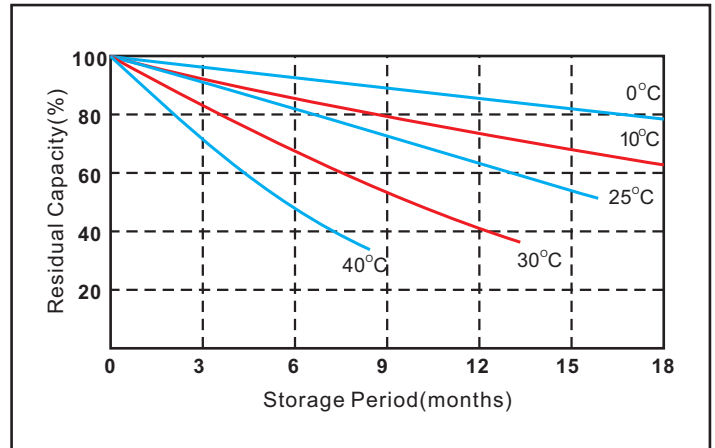

Discharge Current 25°C

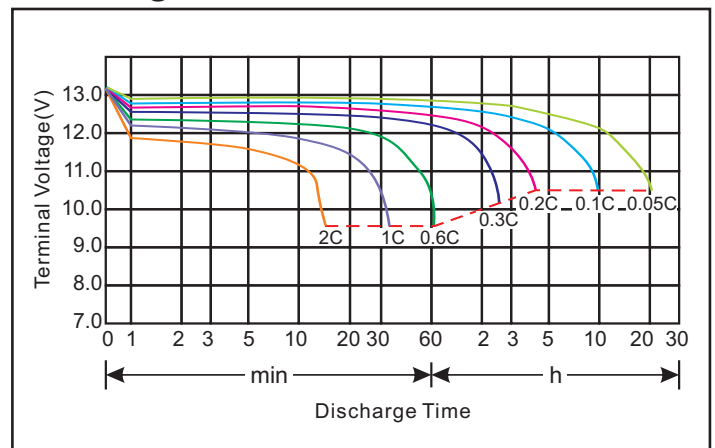

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

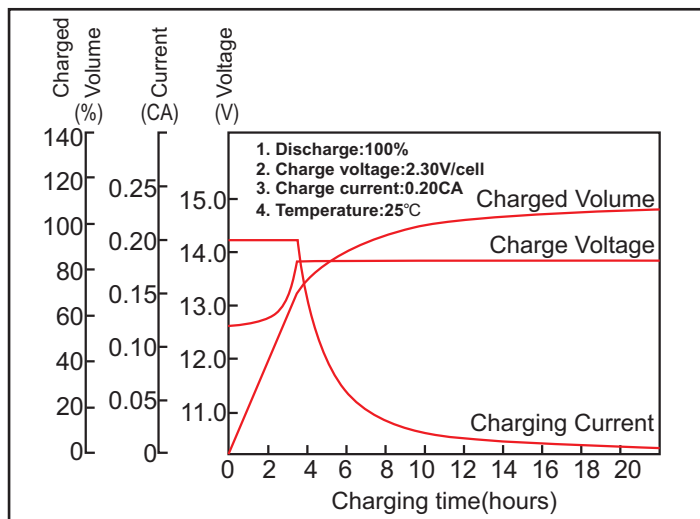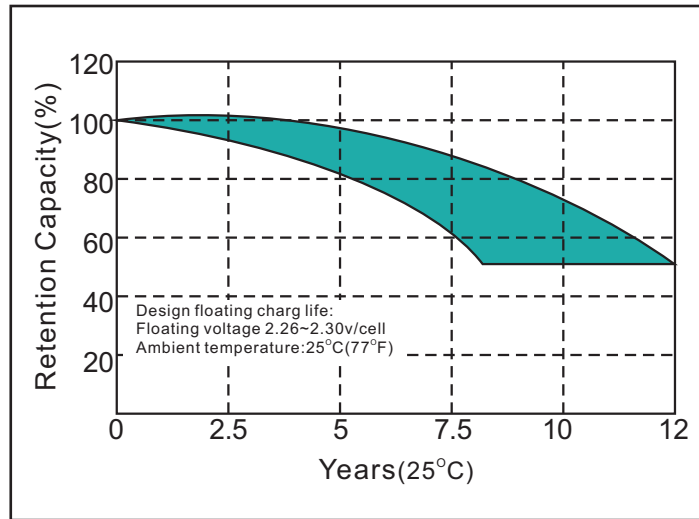MODEL: OT100-12(GEL)/DS-A
NO.: 302070066-00030
Constant voltage charging characteristics

Float Life

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	220.4	175.4	108.2	62.1	36.6	26.5	18.5	12.2	10.3	5.4
10.2V	209.4	168.3	104.2	59.5	36.1	26.1	18.2	12.1	10.2	5.3
10.5V	198.6	162.2	101.2	58.4	35.8	25.9	18.0	12.0	10.1	5.3
10.8V	178.6	157.8	99.00	57.2	35.4	25.6	17.8	11.9	10.0	5.2

Constant Power Discharge Characteristics (Watt, 25°C)

F.V/Time	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60V	2380.8	1925.8	1214.4	742.5	423.8	310.6	219.4	146.3	123.2	64.8
10.2V	2261.5	1848.7	1169.3	712.4	417.8	306.6	215.4	145.7	122.2	64.3
10.5V	2224.3	1816.6	1163.8	671.6	413.8	303.6	212.4	145.3	121.2	64.1
10.8V	2000.3	1767.4	1128.6	652.2	409.8	300.6	210.4	144.3	119.2	63.7

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.