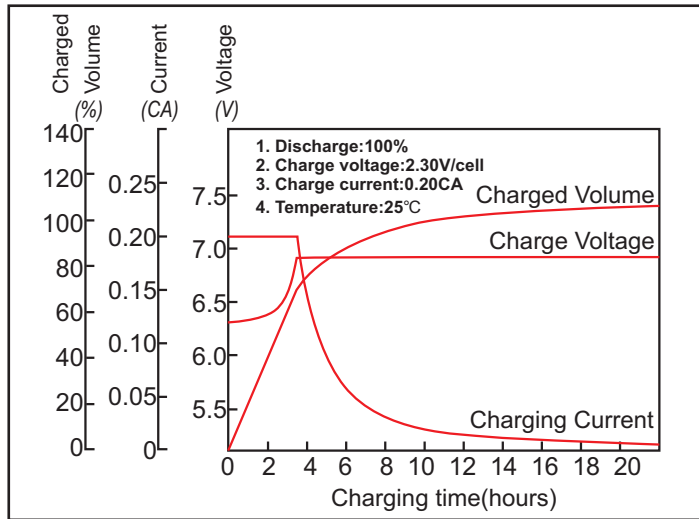
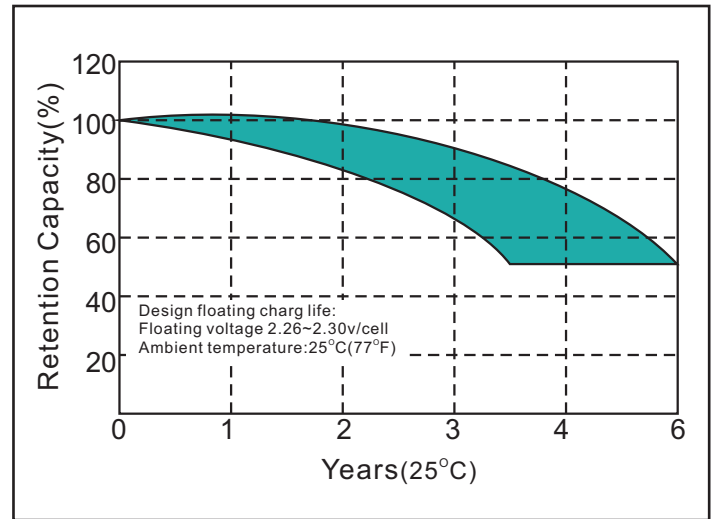


Constant voltage charging characteristics

Float Life

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	1h	1.5h	2h	3h	4h	5h	8h	10h	20h
4.80V	3.61	2.58	2.02	1.42	1.12	0.92	0.61	0.48	0.26
5.10V	3.48	2.52	1.95	1.39	1.09	0.91	0.60	0.47	0.25
5.25V	3.41	2.47	1.92	1.37	1.07	0.91	0.59	0.46	0.25
5.40V	3.33	2.42	1.90	1.35	1.06	0.89	0.58	0.45	0.24

Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	1h	1.5h	2h	3h	4h	5h	8h	10h	20h
4.80V	20.58	14.84	11.62	8.24	6.50	5.38	3.60	2.83	1.55
5.10V	19.84	14.49	11.21	8.06	6.32	5.32	3.54	2.77	1.49
5.25V	19.61	14.45	11.23	8.01	6.26	5.37	3.51	2.74	1.49
5.40V	19.15	14.16	11.12	7.90	6.20	5.25	3.45	2.68	1.43

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	6V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.