CHARACTERISTIC OF VALVE REGULATED FACTORY ACTIVATED LEAD ACID BATTERY

MODEL: YB16L-BS(MF) NO.: 301030005-00160

Container Optional Color

Black C

Plane Chart:

Unit:(mm) Terminal type:(Z2)

Parts:

Executed Standard: JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safty Valve	Seal Glue
ABS	ABS	Pb	PbO2	Pb	AGM	dilute sulphuric acid	Rubber	Epoxy Resin

Parameter Chart:

Volts		12V
Capacity (25°C)	10 hours rate	19Ah
Appx.Dimension (mm)	L±2	173
	W±2	100
	H±2	152
Storage Status	Wet	
Weight (Approx)	6.15Kg	

Retention of Charge Storage @25 ℃		
1 month	97%	Directly Mounted
3 month	90%	Directly Mounted
6 month	80%	Constant Volts:14.4V Limit Current:3.8A Charging Hours:2-3H
12 month	40%	Constant Volts:14.4V Limit Current:3.8A Charging Hours:4-6H

CCA	Factory Standard (-10°C)	Factory Standard (-18°C)
Discharging Current	130A	240A

★The above are average and data obtained from the firsr 3 charge/discharge cycles.These are not minimum values.

★The different item No.of battery can be developed according to the customer's demand.

Discharge Current 25℃

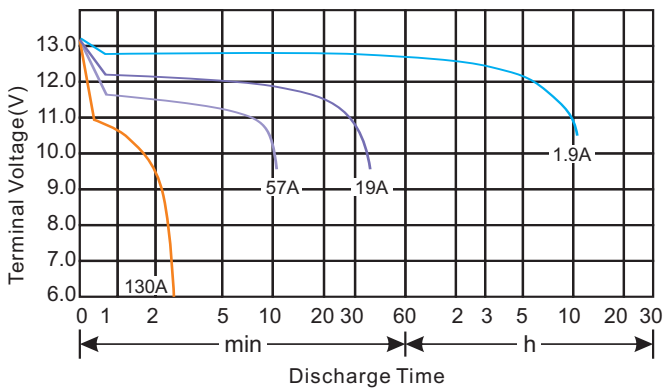

Residual Capacity

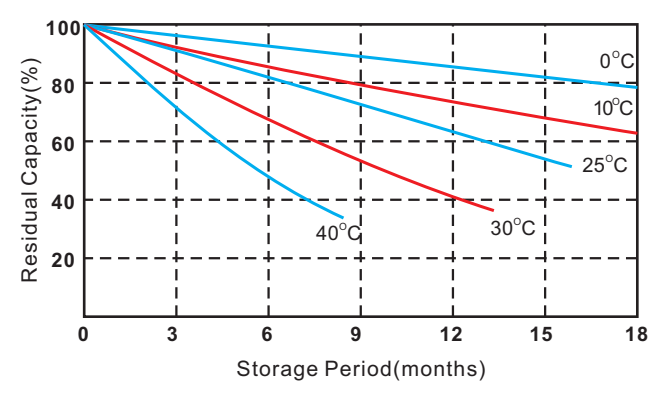

V202009