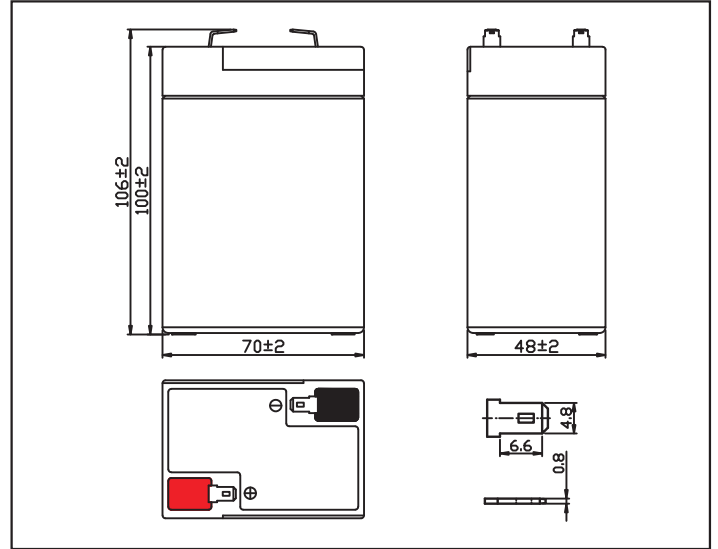


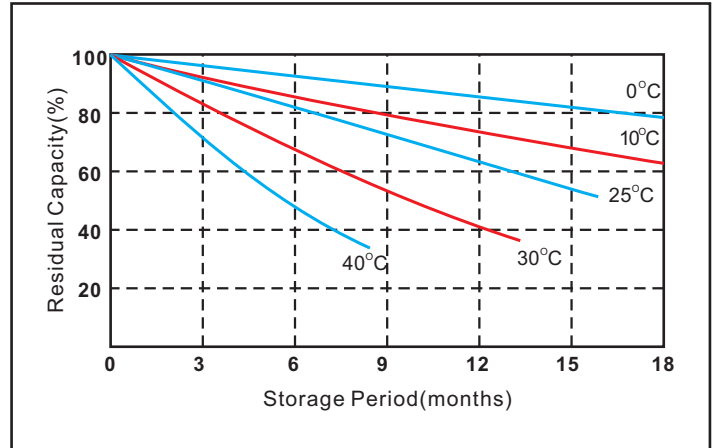
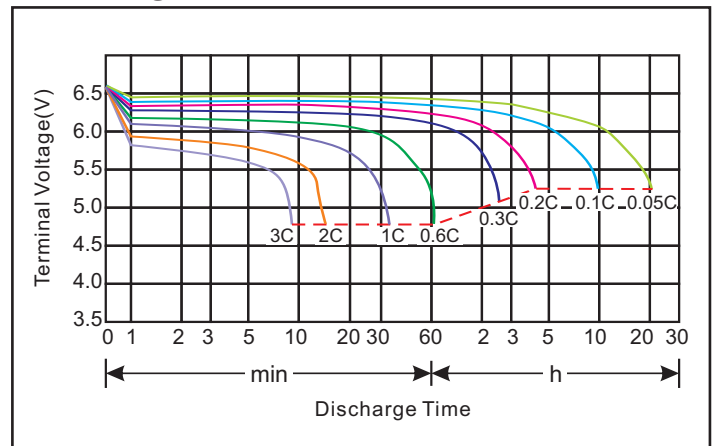
MODEL: OT4.5-6 / A
NO.: 302010005-00016

Plane Chart:

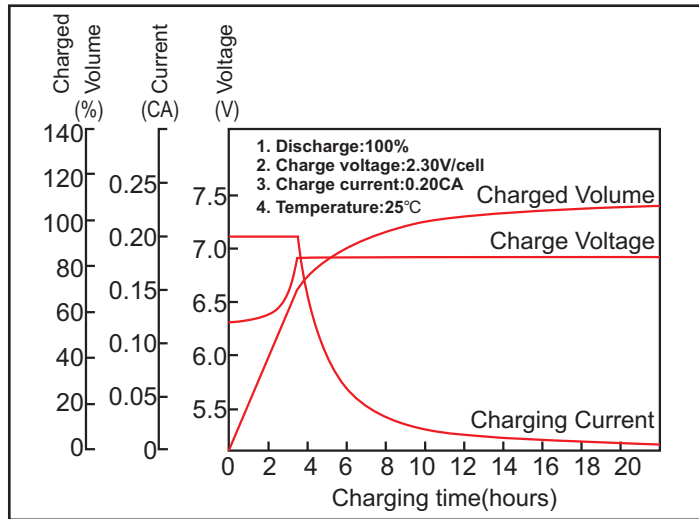
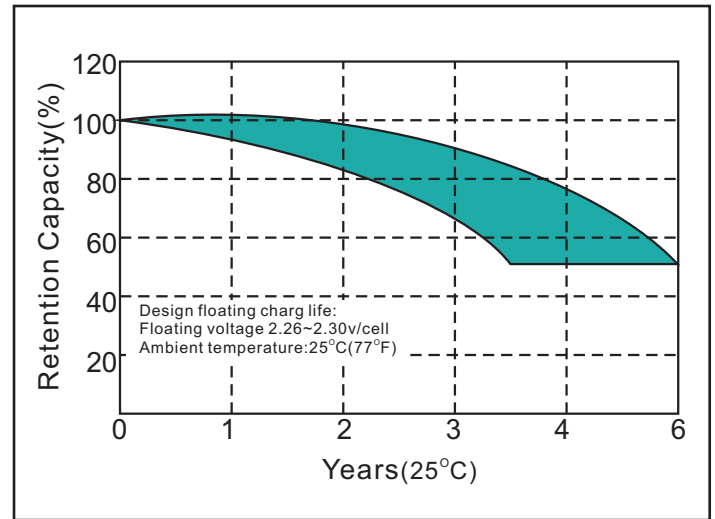
Unit:(mm) Terminal type:(F1)


Parameter Chart:

Volts		6V	
Capacity(25°C)	20 hours rate (0.225A)	4.5Ah	
Discharge Current Testing (25°C)	20 I ₂₀ rate (4.5A,27min)	34min	
	60 I ₂₀ rate (13.5A,7min)	8min	
Internal Resistance	Full Charged Battery 25°C	18mΩ	
Capacity Affected By Temperature	40°C	104%	
	25°C	100%	
	0°C	83%	
	-15°C	65%	
Residual Capacity (25°C)	Capacity After 3 Months Storage	91%	
	Capacity After 6 Months Storage	82%	
	Capacity After 12 Months Storage	65%	
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 1.35A Voltage 7.25~7.45V	
	Float (25°C)	Charge Voltage 6.8~6.9V	
Weight (Approx)		0.8Kg	

Residual Capacity

Discharge Current 25°C


★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

MODEL: OT4.5-6/A
NO.: 302010005-00016
Constant voltage charging characteristics

Float Life

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80V	15.36	9.79	7.89	4.77	2.66	1.54	1.08	0.75	0.52	0.43	0.24
5.10V	14.61	9.30	7.57	4.58	2.55	1.52	1.07	0.74	0.51	0.42	0.23
5.25V	14.15	9.01	7.38	4.47	2.49	1.49	1.06	0.73	0.51	0.42	0.23
5.40V	13.70	8.72	7.19	4.35	2.42	1.47	1.05	0.72	0.50	0.41	0.22

Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80V	82.92	53.38	43.37	26.73	15.14	8.86	6.26	4.39	3.07	2.55	1.43
5.10V	80.34	51.59	42.39	25.89	14.52	8.74	6.21	4.33	3.00	2.48	1.37
5.25V	78.54	50.43	41.69	25.45	14.29	8.72	6.20	4.31	3.02	2.50	1.34
5.40V	76.69	49.24	40.97	25.01	13.94	8.60	6.14	4.25	2.98	2.44	1.31

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	6V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.