

# CSD 系列 / CSD SERIES



## PRODUCT INFORMATION/ 产品信息

Pump Design/产品名称: Solenoid Diaphragm Pump/电磁隔膜水泵  
 Insulation/绝缘等级: Class H  
 Net Weight/产品净重: 0.071Kg  
 Outlet Connector/出水接口: Barb port/倒扣

## LABORATORY TEST CONDITION/ 工作条件

- Ta within 80°C, Tf within 45°C / Ta: 80°C以下, Tf: 45°C以下
- ED100%: work continuously / ED100%: 持续工作
- Ta: Ambient temperature / Ta: 环境温度
- Tf: Temperature of fluid water / Tf: 流体温度


## APPLICATIONS/ 应用领域

Steam Iron、Garment Cleaner、Steam Cleaner、  
 蒸气熨斗、蒸汽刷、蒸气挂烫机

型号 / Model	CSD	CSD 02	CSD 03
流量 / Flowrate (ml/min)	20	40	60
最大压力 / Max Pressure (bar)	0.2	0.3	0.4
功率 / Power (W)	7		
噪音 / Noise (dB)	50		
工作方式 / Duty Cycle	ED 100%/持续工作		
电压规格 / Voltage	220-240V/50-60Hz, 120V/60Hz, 100V/50-60Hz		
产品认证 / Product Certificate	TUV, UL, CQC		

## Performance Curve/ 性能曲线

测试条件: 水温20°C, 室温25°C。所有参数公差为±15%, 仅供参考。  
 Test Condition: Water temperature 20°C, Indoor temperature 20°C. The tolerance range of all the parameters is ±15%. Just for reference.

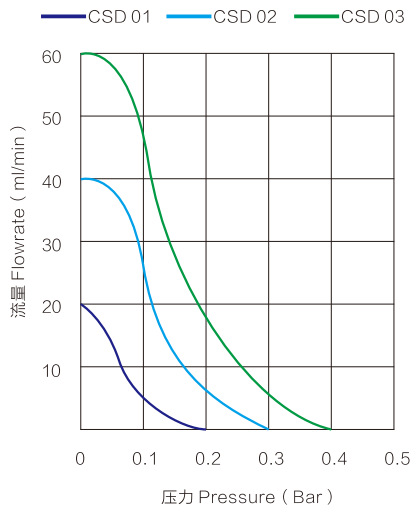

## Mechanical Drawing & Dimension/ 外型尺寸

