

CNV 2 系列 / CNV2 SERIES



PRODUCT INFORMATION/ 产品信息

Pump Design/产品名称: Solenoid(Piston) Valve/电磁阀
 Insulation/绝缘等级: Class H
 Net Weight/产品净重: 0.09Kg
 Outlet Connector/出水接口: Barb port/倒扣

LABORATORY TEST CONDITION/ 工作条件


· Ta within 80°C, Tf within 72°C / Ta: 80°C以下, Tf: 72°C以下
 · ED100%: work continuously / ED100%: 持续工作
 · Ta: Ambient temperature / Ta: 环境温度
 · Tf: Temperature of fluid water / Tf: 流体温度

APPLICATIONS/ 应用领域

Steam Mop、Steam Cleaner
 蒸汽地拖、蒸汽清洁机

型号 /Model	CNV2
最大压力 /Max Pressure(bar)	5
功率 /Power(W)	9
工作方式 /Duty Cycle	ED 100% / 持续工作
电压规格 /Voltage	AC 220~240V 50Hz 120V 60Hz
产品认证 /Product Certificate	RoHS

Mechanical Drawing & Dimension/ 外型尺寸

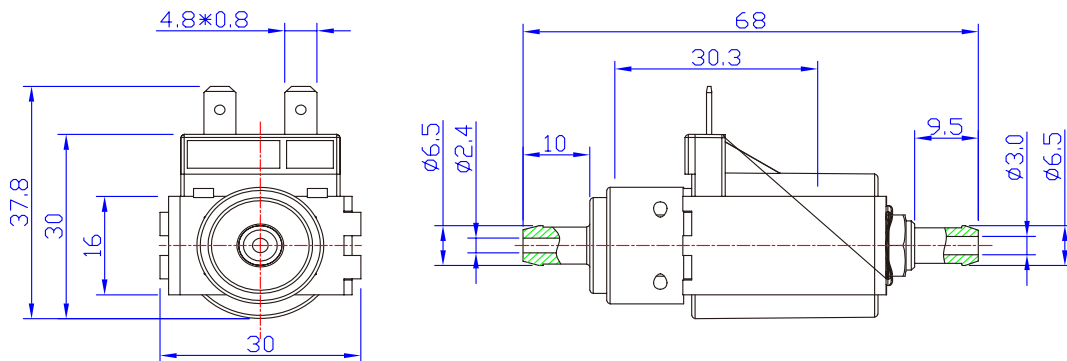

Dimensions/ 单位: millimeters/ 毫米