

CNM 3 系列 / CNM 3 SERIES



PRODUCT INFORMATION/ 产品信息

Pump Design/产品名称: Solenoid(Piston) Pump/电磁水泵
 Insulation/绝缘等级: Class H
 Net Weight/产品净重: 0.215Kg
 Outlet Connector/出水接口: Barb port/倒扣

LABORATORY TEST CONDITION/ 工作条件

- Ta within 60°C, Tf within 35°C / Ta: 60°C 以下, Tf: 35°C 以下
- work continuously or 2 minutes on/1 minute off / ED 100%: 持续工作或2分钟开/1分钟关
- Ta: Ambient temperature/ Ta: 环境温度
- Tf: Temperature of fluid water/ Tf: 流体温度

APPLICATIONS/ 应用领域


Steam Station
 蒸汽站/台体式蒸汽熨斗

Self-priming at 0 BAR(Psi), except SV type Suitable to dry-use only during priming
 仅无负压下自吸, SV系列除外, 仅允许在上水启动时短时干抽


型号 / Model	CNM3 01	CNM3 02	CNM3 03	CNM3 04	CNM3 05
流量 / Flowrate (ml/min)	200	230	400	750	1200
最大压力 / Max Pressure(bar)	9.0	10	6.0	5.0	3.5
功率 / Power(W)	22	30	22	22	22
噪音 / Noise(dB)	55				
工作方式 / Duty Cycle	持续工作 ED 100%	2分钟开/1分钟关 2 minutes on/1 minute off	持续工作 ED 100%	2分钟开/1分钟关 2 minutes on/1 minute off	持续工作 ED 100%
电压规格 / Voltage	220-240V/50-60Hz, 120V/60Hz, 100V/50-60Hz				
产品认证 / Product Certificate	TUV、UL				

Performance Curve/ 性能曲线

测试条件: 水温20°C, 室温25°C。所有参数公差为 ± 15%, 仅供参考。
 Test Condition: Water temperature 20°C, Indoor temperature 20°C. The tolerance range of all the parameters is ± 15%. Just for reference.

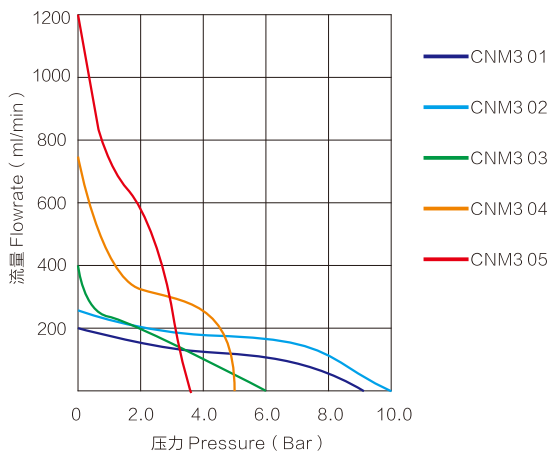

Mechanical Drawing & Dimension/ 外型尺寸

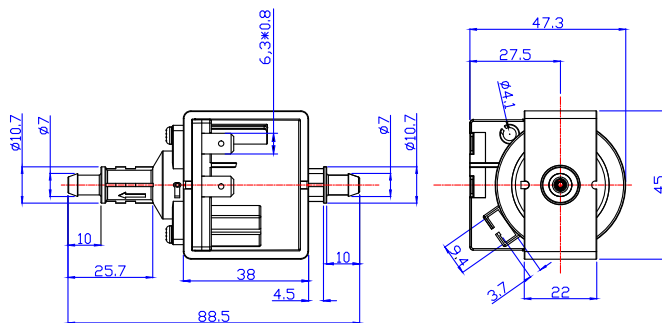

Dimensions/ 单位: millimeters/ 毫米