




Making A New Landmark of Packaging Tapes !










PACKAGING



Synthetic Rubber Tape

Thanks for all our valued customers' support, Hyseal was growing healthily in the past four years. All of your support and trust have been transferred as our motivation, obligation. In 2014 we start hot melt tape production, hope this will bring one more choice for you and will strengthen our win-win relation. . .



Application	 Grade	 Film (μm)	 Adhesive (gr/sqm)	 Initial Tack (cm)	 Shear value (hours)	 Peeling Adhesion (N/inch)	 Tensile Strength (N/inch)	 Elongation (%at break)	 Storage (°C)
Hand Roll	Economy	25	16	<5	>48	10	65	105	15-35
Machine Roll	Economy	25	16	<5	>48	10	65	105	15-35
	Industrial	28	17	<5	>48	13	80	110	15-35
Anti-Frozen	Industrial	30	20	<5	>48	14	90	110	15-35
Printing	Premium	32	20	<5	>48	14	95	115	15-35



Smartape



.....Making Smartape
with RySeal wisdom.....

Smartape®

saves more than 1...

Features:

- Save cost
- Save storage space
- Save transportation space & charge
- Eco-friendly
- Improve efficiency



Width (mm)	Length (mtr)	Adhesive	Grade	Bopp Film (mu)	Adhesive (gr)	Type	Initial Tack (cm)	Shear Value (hours)	Peeling Adhesion (N/inch)	Tensile Strength (MD)	Elongation at Break (%)
36/38/48 50/72/75	150	Acrylic	Premium	>32	>25	Low Noise	<3	>24	8	95	120
		Acrylic	Industrial	28	24	Low Noise	<4	>24	7	80	110
		Acrylic	Medium	25	22	Low Noise	<5	>24	6.5	65	105
	200	Acrylic	Economy	23	20	Noise	<5	>24	6.5	55	100
		Acrylic	Economy	23	17	Noise	<5	>24	6	55	100
		Hot Melt	Industrial	28	17	Noise	<5	>48	13	80	110
		Hot Melt	Economy	25	16	Noise	<5	>48	10	65	105

Color available: transparent, brown, white, red, orange, yellow, green, blue, black, printed.

Serrated Tape

- Serrated Edges
- Very Easy Tear
- Strong Adhesion
- Ideal for Home - Office Application





Crystal Low Noise Tape

Physical and technical data

- Film: Biaxial-Oriented Polypropylene
- Adhesive: Pressure Sensitive Water Base Acrylic
- Width(mm): 36, 38, 45, 48, 50, 60, 72, 75
- Length(m): <132m
- Film Available: 23 μ , 25 μ , 28 μ

BACK TO NATURE

Sandwich Printed Tape



- Color: 1~4 colors
- Width: 12~75mm
- Thickness: 36~60 μ
- Length: 33~990m

Plain Low Noise Tape



- Film: 38/35/32/28/25/23 μ
- Width: 75/72/60/50/48/45/38/36mm
25/24/19/18/15/12mm
- Adhesive: 15~25gr/m²
- Length: 50~990m



Colorful Low Noise Tape

Film: Biaxial-Oriented Polypropylene
Adhesive: Pressure Sensitive Water Base Acrylic
Color: Red, orange, yellow, green, blue, white, black
Width(mm): 36,38,45,48,50,60,72,75
Length(m): 50 ~ 990
Thickness (μ): 40 ~ 65

Easy Tear Low Noise Tape



The ETLNT is designed both for industry & home use that generally a tape dispenser is not available. The tape can be tore off with fingers in a correct way. The roughly crushed tape edge is the guarantee of easy tearing by hands.



Machine Roll



ENE-22954
48mm x 990m
Clear Machine Roll
Stock Ref 0799
6 Rolls

Physical and technical data

- Film: Biaxial-Oriented Polypropylene
- Adhesive: Water Base Acrylic / Hot Melt
- Width(mm): 36, 38, 45, 48, 50, 60, 72, 75
- Length(m): <1800m
- Film Available: 23 μ , 25 μ , 28 μ , 32 μ



Protection Tape



The tape is designed to protect your object from dust, moisture, friction, damage, etc.

Main features:

- Low tack
- Easy removal
- No residue
- Eco-friendly

Block Roll for SIAT Machine



Main Characteristics


- Untreated backing side
- Special glue formulation
- High Tack
- Width Available: 144/150mm
- Length Available: 990/1056/1320m
- Color Available: white/clear



Grade	Film (μ)	Adhesive (gr/m^2)	Initial Tack (cm)	Shear Value (hours)	Peeling Adhesion (N/inch)	Tensile Strength (N/inch)	Elongation (% at break)
Economy	25	18	<5	>24	>6	65	105
Medium	28	22	<4	>24	>7	80	110
Industrial	32	24	<4	>24	>8	95	110
Premium	38	26	<4	>24	>9	120	120

- Suggested printing corona treatment: ≤ 31 dynes.

Tape Dispenser

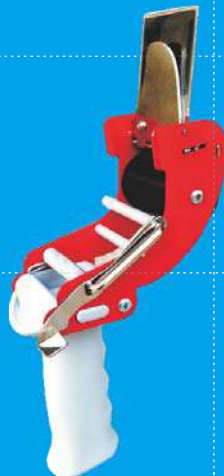

No. 8125
For 1" core


No. 8325
For 1~3" cores

No. 1525
For 1.5" core

No. 8075
For 3" core

No. 8175
For 3" core

STATIONERY



Invisible Tape

Dear our valued customers,
Thank you!

For your years of trust,

This is the only incentive for us,

To keep going and creating more benefits for you!

Time will be the witness.

Regards

Amber





Office Tape

Ideal for home • school • office

Retail Items



DTD1815-102



STD1833-102



STD1215-502



GTD1920-501



DTD1515-501



ST1220-601



DTD1915-601



ST1830-602



DTD1815-101

Retail Items



STD1215-501



GTD1920-502



Mt363001



PTT48661



STY12206



STT18504



STY18504



STT12506




STC12206

INDUSTRIAL



Masking Tape

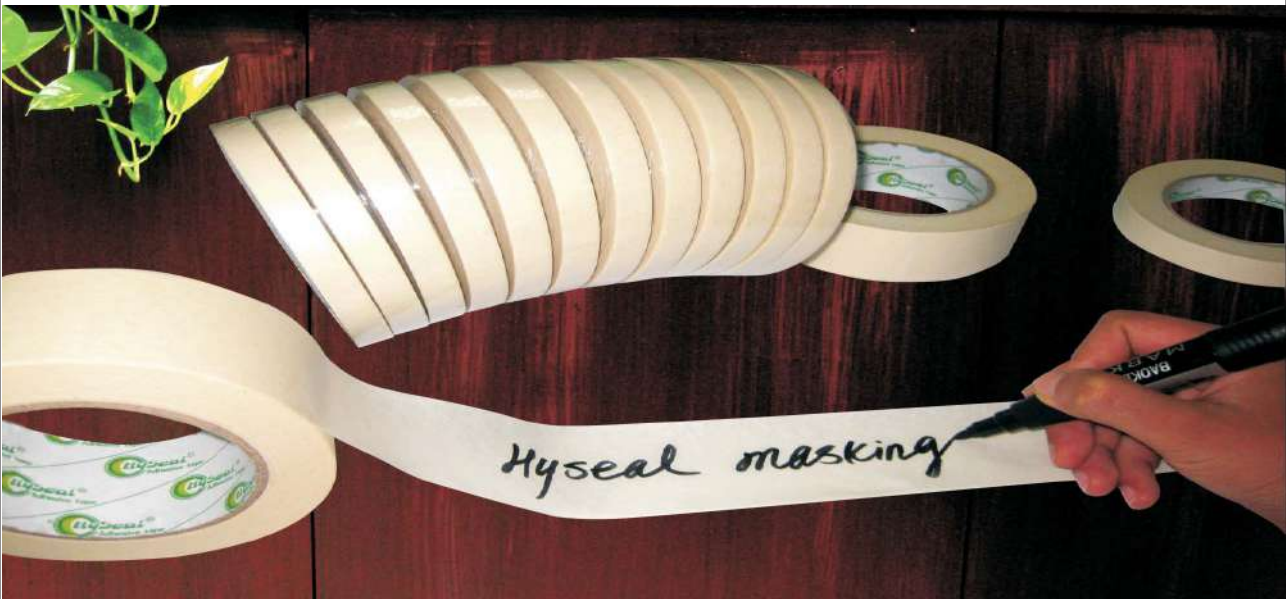

Grade A

GP Masking Tape

Temperature Resistance: $\leq 80^{\circ}\text{C}$

Grade B

High Temperature Masking Tape

Temperature Resistance: $\leq 170^{\circ}\text{C}$

These two grades have the same characteristics as follows:

Backing: Crepe paper

Adhesive: Natural rubber

Total Thickness: $130\mu\text{m}\pm 10$

Color: Cream white

Length: $\leq 60\text{m}$

Width: 9/11/12/18/19/24/25/36/38/45/48/50/60/72/75mm

Main applications: painting, light packaging, binding, surface marking.

Shelf life: 1 year

Storage: in original packaging in cool, dry area, away from sunlight, moisture.

Application: Applied onto clear, dry and oil-free surfaces.



Double Side PP Tape ↑
(For special applications)

Backing material: Silicon release paper
Adhesive: solvent, hot melt, acrylic
Liner material: BOPP film
Thickness: 100 μ m \pm 5
Strong adhesion
High tensile strength

Double Side Tape



Double Side EVA Foam Tape ↓

Backing material: Silicon release paper
Adhesive: solvent
Thickness: 1mm, 1.5mm, 2mm
Liner material: EVA foam
Paper core: 1.5
Length available: 2-10m

Double Side Tissue Tape ↑
(For general purpose applications)

Backing material: Silicon release paper
Adhesive: solvent, hot melt, acrylic
Liner material: tissue
Thickness: 90/100 μ m \pm 5
Easy Tear
High tack, double-sticky



Paper Tape

Kraft Paper Tape

The most frequently used for general purpose packaging. Coated with hot melt adhesive.



Reinforced Gum Tape

The tape is laminated with fiberglass, designed for heavy duty packaging. It has a high resistance to abrasion in transportation. Printed is available.



Gum Tape

- Need water to activate
- High adhesion
- Strong tensile strength
- Long shelf life
- Free of pollution
- For special applications





Cloth Tape

Physical and technical data

Backing material: Extruded cloth

Adhesive: Natural rubber

Total thickness: 230/250 μ m

Adhesion to steel: 10.16N/inch

Mesh: 70

Temperature resistance: 80 $^{\circ}$ C

Width available: 18/24/36/48/50/60/72/75mm

Length: 5-50m

Color available: red, orange, yellow, green, blue,
white, black, silver

Main Applications

- » marking, packaging, protecting, fastening, closing
- » Bonding of construction films
- » Closing of cartons
- » Fixing of wires
- » Splicing of films
- » Carpet fixing




Reflective Warning Tape

Backing material: PET
Adhesive: solvent
Operating temperature: 5-45°C
Shelf life: 3 years
Untearable
Good extensibility
Excellent for computer cutting
With release paper

BOPP Warning Tape

Backing material: BOPP film
None adhesive
Single/double color printing
Two colors printing
Thickness: 25, 28, 32, 35μ
Ideal replacement for PE warning tape

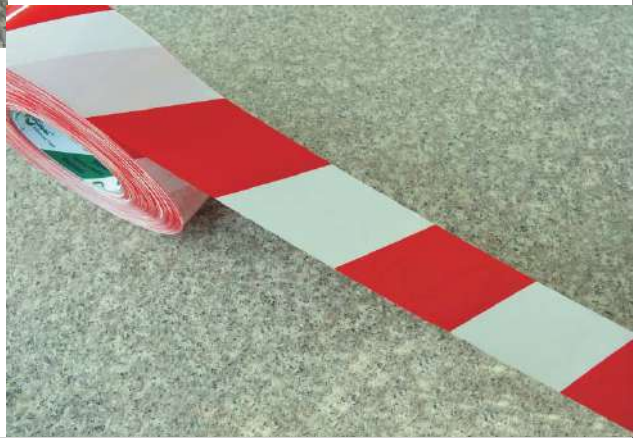

PVC Warning Tape



Film: PVC

Adhesive: solvent

Total thickness(μ): 135

Color: red/white; black/yellow; blue/white; green/white; white/black

Application temp($^{\circ}$ C): -5 ~ 40

Aluminium Foil Tape


Versatile heat-shielding tape to seal ducts.

- Linerless
- Waterproof
- Good adhesion
- High peeling adhesion
- U.V. Resistance
- Flame and moisture resistance
- Indoor and outdoor application



Reinforced Aluminium Foil Tape

- Low moisture vapor transmission rate
- Laminated with scrim
- Kraft paper liner
- Coated with solvent acrylic adhesive
- With release paper
- Various applications
- Eco-friendly

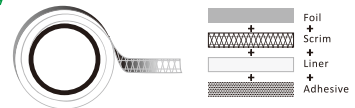

Anti-slip Tape



Film: PET

Adhesive: Acrylic

Total thickness: depends on Sand surface

Color: Black, grey, blue, green, red, white, glow or mixed.

Water proof

U.V. resistance

Easy to use


With release paper

Long shelf life

Glow Tape



This product can absorb the light and glow from time to time, when there is darkness while it emits lights as a signal for direction, warning!
Total thickness: 190u
Peeling Adhesion: 6.5N/inch
Brightness color: Kelly
Lasting time: 7 hours
Indoor and outdoor use



PVC Insulation Tape

Physical and Technical Data

- » Backing material: soft PVC
 - » Type of adhesive: solvent
 - » Total thickness: 150/180 μ m
 - » Adhesion to steel: 1.4N/cm
 - » Tensile strength: 11N/cm
 - » Paper core: 1.5", 3"
- » Suitable for most electrical insulation application such as splicing and protection.
 - » Width available: 15mm, 18mm, 19mm
 - » Color available: red, orange, yellow, green, blue, white, black



Dongguan Hyseal Co.,Ltd

Add: Baolian Industrial Park, Gaobu, Dongguan 523282, Guangdong, China

Tel: +86 769 8130 0836 8130 0918

Fax: +86 769 8130 0830

Mail: info@hyseal.com hysealtape@126.com

www.hyseal.com