HySeal 兴盛胶粘

S O P S

(Standard Operation Procedure Sheet)

i.e. 48mm x 66m 25my+20gr/m² clear

Film: Biaxial-Oriented Polypropylene

Adhesive: Pressure Sensitive Water Base Acrylic

Film: 25my (+/-4%)

Adhesive: 20gr/m² (+/-6%)

Width: 48mm (100%)

Length: 66m (100%)

Color: clear

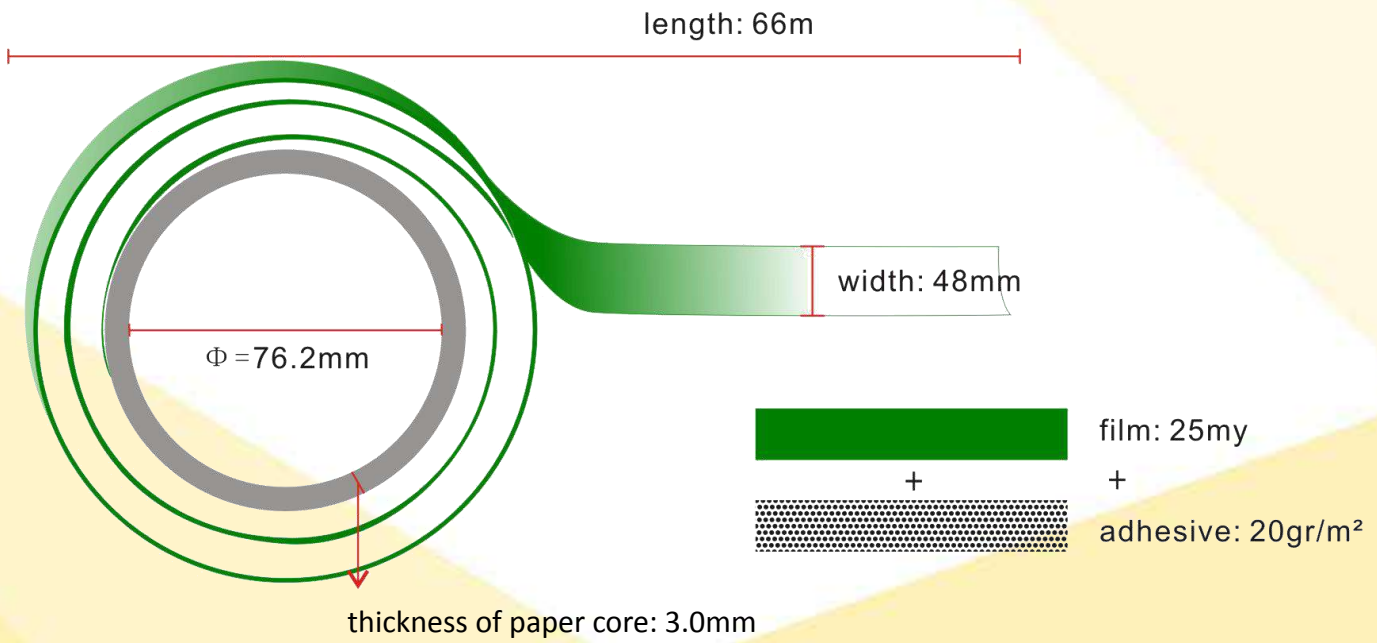

HySeal® 兴盛胶粘

Diameter of Paper Core: 76.2mm (+/-2mm)

Thickness of Paper Core: 3.0mm (+/-0.5mm)

Paper Core: plain or printed (max. two colors)

Plain Paper Core

Printed Paper Core

HySeal®
兴盛胶粘

Easy End Tab

Easy for end-users to find out the start!

HySeal® 兴盛胶粘

6rolls/flat pack; 36rolls/carton

Package

6rolls/tower pack; 72rolls/carton

Carton: brown or white

HySeal® 兴盛胶粘

Palletized Loading

20'GP =12pallets; 40'HQ =24pallets

Loose Loading

20'GP =29CBM; 40'HQ =69CBM