





## MSV3-08-2NCS

二位二通电磁阀(常闭型)  
2-Way,2-Position  
(Normally Closed)

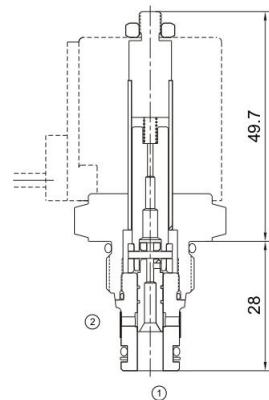

### 机能符号 Symbol




### 技术参数 Specifications

· 工作压力 Operating Pressure	207BAR
· 流量 Flow	9.5L/min
· 内泄漏 Internal Leakage	2drop/min.max.at operating pressure
· 温度 Temperature	-30°C to +120°C(-22°F to +250°F)
· 插孔 Cavity	08-2 see page K-9
· 流体 Fluids	Mineral-based fluids with viscosities of 7.4 to 420 cSt.

### 产品特性 Features

- 硬化处理,零件耐久性强  
Hardened,precision ground parts for durability
- 工业通用插孔  
Industry common cavity
- 高效能的电磁铁结构  
Efficient wet-armature construction
- 可持续工作的电磁铁  
Continuous-duty solenoid
- 紧凑的结构  
Compact size


压力-流量性能曲线  
Performance Curve Pressure Drop vs.Flow  
150ssu/32 cSt OIL@100°F/38°C

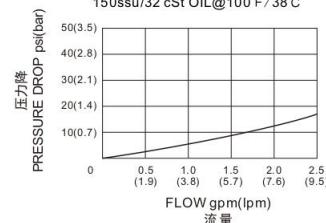

### 工作 Operation

当电磁阀不通电时, 截止油液双向流动;  
通电后, 插件的阀芯移动, 从而允许油液双向流动。  
When de-energized , the valve blocks flow in both directions.  
When energized, the valve's spool shifts moves to allow bi-directional flow.

### 安装尺寸 INSTALLATION DIMENSIONS

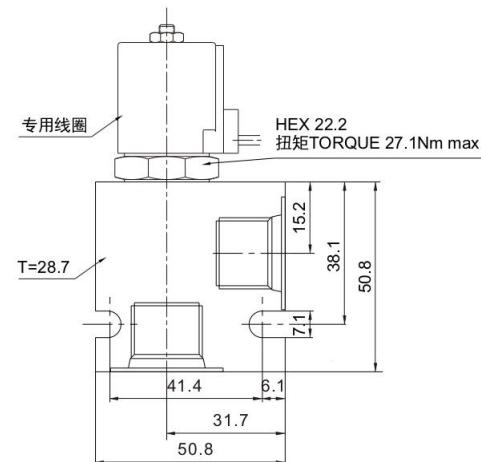

E

### 订购型号 Order Type

MSV3-08-2NCS - \* - \* \* \* - \* \*

---

 I      II      III      IV      V      VI

- |   |  |  |
|---|--|--|
| I. 油封 Seal-Kits<br>N=丁腈橡胶 Buna N<br>V=氟橡胶 Viton   | II. 电压 Voltage<br>12=12V<br>24=24V<br>110V=110V<br>220V=220V   | V. 阀块材质 BODY MATERIAL<br>A=6061-T6铝<br>耐压强度207Bar<br>6061-T6 aluminum<br>alloy rated at 207Bar |
| III. 线圈连接 Coil Connection<br>A=安普插头 Amp Plug<br>B=插片 Double Spade<br>D=双线引出 Double Lead<br>S=单线引出 Single Lead<br>H=DIN43650 | VI. 阀块油口 BODY PORTING<br>4T=SAE 4T<br>8T=SAE 8T<br>3G=G3/8<br>3N=NPT3/8<br>其他螺纹油口是可选择的<br>Other porting is available | S=钢材 耐压强度350Bar<br>steel rated at 350Bar   |
| IV. 电流类型 Current Type<br>D=直流电 Direct current<br>A=交流电 Alternating current  |  |  |