




钰腾机械
YuTeng Machinery

高速电脑绗缝设备专业制造商
HIGH-SPEED COMPUTERIZED QUILTING MACHINE PROFESSIONAL MANUFACTURER



东莞市钰腾机械科技有限公司
DONGGUAN YUTENG MACHINERY TECHNOLOGY CO.,LTD.



钰腾机械

东莞市钰腾机械科技有限公司

品质第一

以诚信求生存
以品质谋发展

COMPANY PROFILE

公司简介

东莞市钰腾机械科技有限公司（简称“钰腾机械”）是集产品研发、生产、销售及服务为一体的现代化高科技企业，是国内唯一具备机械和软件自主研发能力的绗缝设备生产企业。公司主营产品为“钰腾机械”品牌系列的“高速电脑无梭多针绗缝机”、“高速电脑有梭多针绗缝机”、“高速电脑双排梭绗缝绗绣一体机”及相关配套的“电脑智能裁剪机”“成品卷布机”“绕线机”等，广泛应用于服装、床上用品、手袋、睡袋、家居装饰品、汽车用品等生产领域。

钰腾机械创办人胡小可先生自1994年起投身于绗缝设备制造业至今已逾20余年。拥有丰富的制造经验，精湛的生产技术和先进的产品设计理念，在绗缝业内已久誉盛名。创新的技术力量、稳定的产品品质、优质的售后服务，使得胡小可先生旗下的品牌设备畅销国内外。

公司拥有由20余名机械、自动化、计算机等专业技术人才组成的优秀研发团队和实干型管理团队，坚持不断推陈出新，精益求精的工作作风和执行严格的质量管理体系，确保产品具有功能强、性能稳、操作易、效率高等特点。

公司坚持“产品是最好的营销，品质是最佳的服务”的经营理念，用优质的产品品质，覆盖全国的售后网点，广泛赢得了广大新老客户的认可和信赖。

诚信、专业、科技、创新。钰腾机械期待与您携手并进，共创辉煌！

DongGuan YuTeng Machinery Technology Co.,Ltd. is a modernized, high-tech enterprise specializing in High-speed Computerized Shuttle (Lock Stitch) Multi-Needle Quilting Machine, Computerized Quilting and Embroidery Machine, Computerized Chain Stitch Multi-Needle Quilting Machine, High-speed computerized double-row quilting and embroidery Machine, Computerized Panel Cutter Machine, Roller Machine. The products are widely used in garment, bedding, handbags and household ornament etc. With strong R&D both in machinery and software, our company focuses on the profound development in production, sales, and service.

The founder of YuTeng Machinery, Mr Xiaoke Hu, who engaged in quilting machinery industry for over 20 years, proficient in advanced manufacturing technology, unique designs and Innovation. He has won a good reputation in the industry. With innovative technology, stable quality and high quality after service, products in his brand sell very good at home and abroad. Leading an outstanding R&D team more than 20 professional engineering and technical personnel and customer service outlets throughout the country, YuTeng always provides clients with full technical support and perfect after service.

With integrity, profession, innovation, science and technology, YuTeng is looking forward to cooperating with companies from all over the world.



制造车间

MANUFACTURING WORKSHOP



企业证书


COMPANY CERTIFICATES

诚信赢天下，品质铸辉煌！
产品是最好的营销，品质是最佳的服务！

Integrity wins the world, quality creates brilliance!
Product is the best marketing, quality is the best service!



索引
INDEX

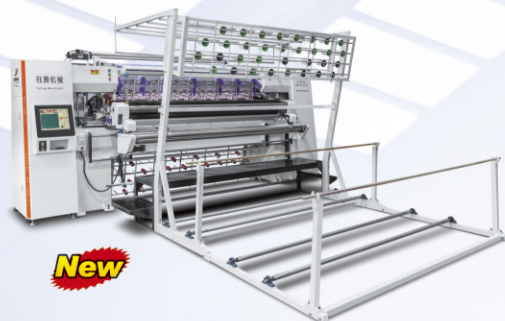


New

YT3500A

超高速电脑无梭多针绗缝机
Ultra High-speed Computerized Chain
Stitch Multi-needle Quilting Machine


07-08

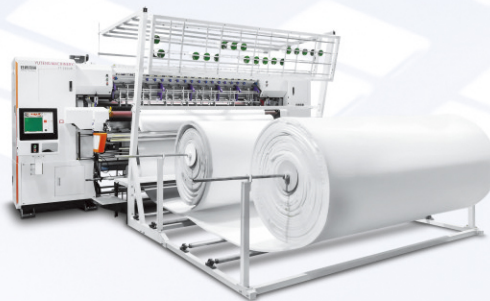

YT-3200B

高速电脑无梭多针绗缝机
High-speed Computerized Chain
Stitch Multi-needle Quilting Machine

09-10

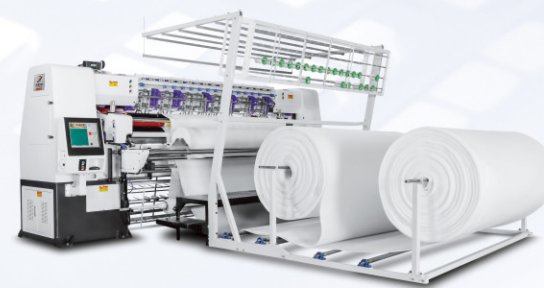

YT-3000A

高速电脑无梭多针绗缝机
High-speed Computerized Chain
Stitch Multi-needle Quilting Machine

11-12




New

YGH SERIES

超高速电脑有梭多针绗缝机
Ultra High-speed Computerized Lock
Stitch Multi-needle Quilting Machine


13-14

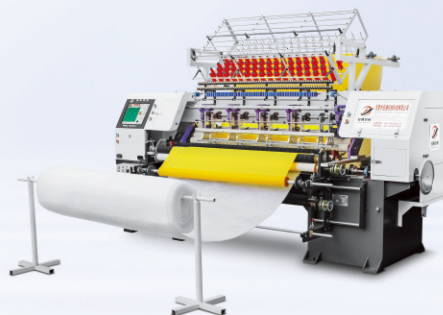

YGB SERIES

高速电脑有梭多针绗缝机
High-speed Computerized Lock Stitch
Multi-needle Quilting Machine

15-16

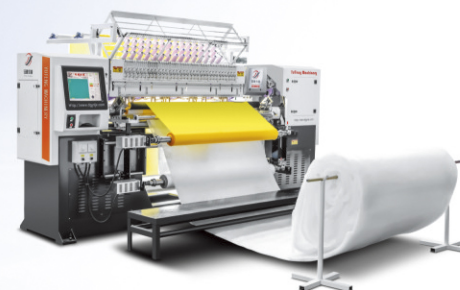


X64 / X96

高速电脑双排旋梭绗缝绣一体机
High-speed Computerized
Double-row Quilting And Embroidery Machine

17-18


索引
INDEX

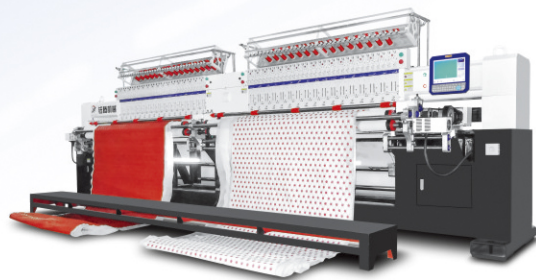

YTX2 SERIES

高速电脑分段绗绣一体机
High-speed Computerized Segmented Quilting
And Embroidery Machine

19

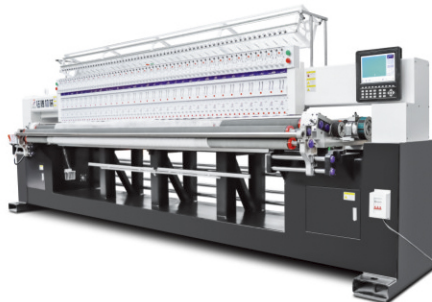

YT SERIES

高速电脑绗绣一体机
High-speed Computerized Quilting
And Embroidery Machine


20



YTCM96-H

电脑智能裁剪机
Computerized Panel Cutter Machine

21

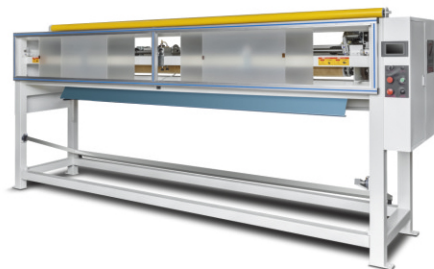

YTCM-C SERIES

电脑智能裁剪机
Computerized Panel Cutter Machine

22



定制类机械
Customized Machinery

23



辅助类机械
Auxiliary Machinery


24

YT3500A

超高速电脑无梭多针绗缝机

ULTRA HIGH-SPEED COMPUTERIZED CHAIN STITCH MULTI-NEEDLE QUILTING MACHINE

New

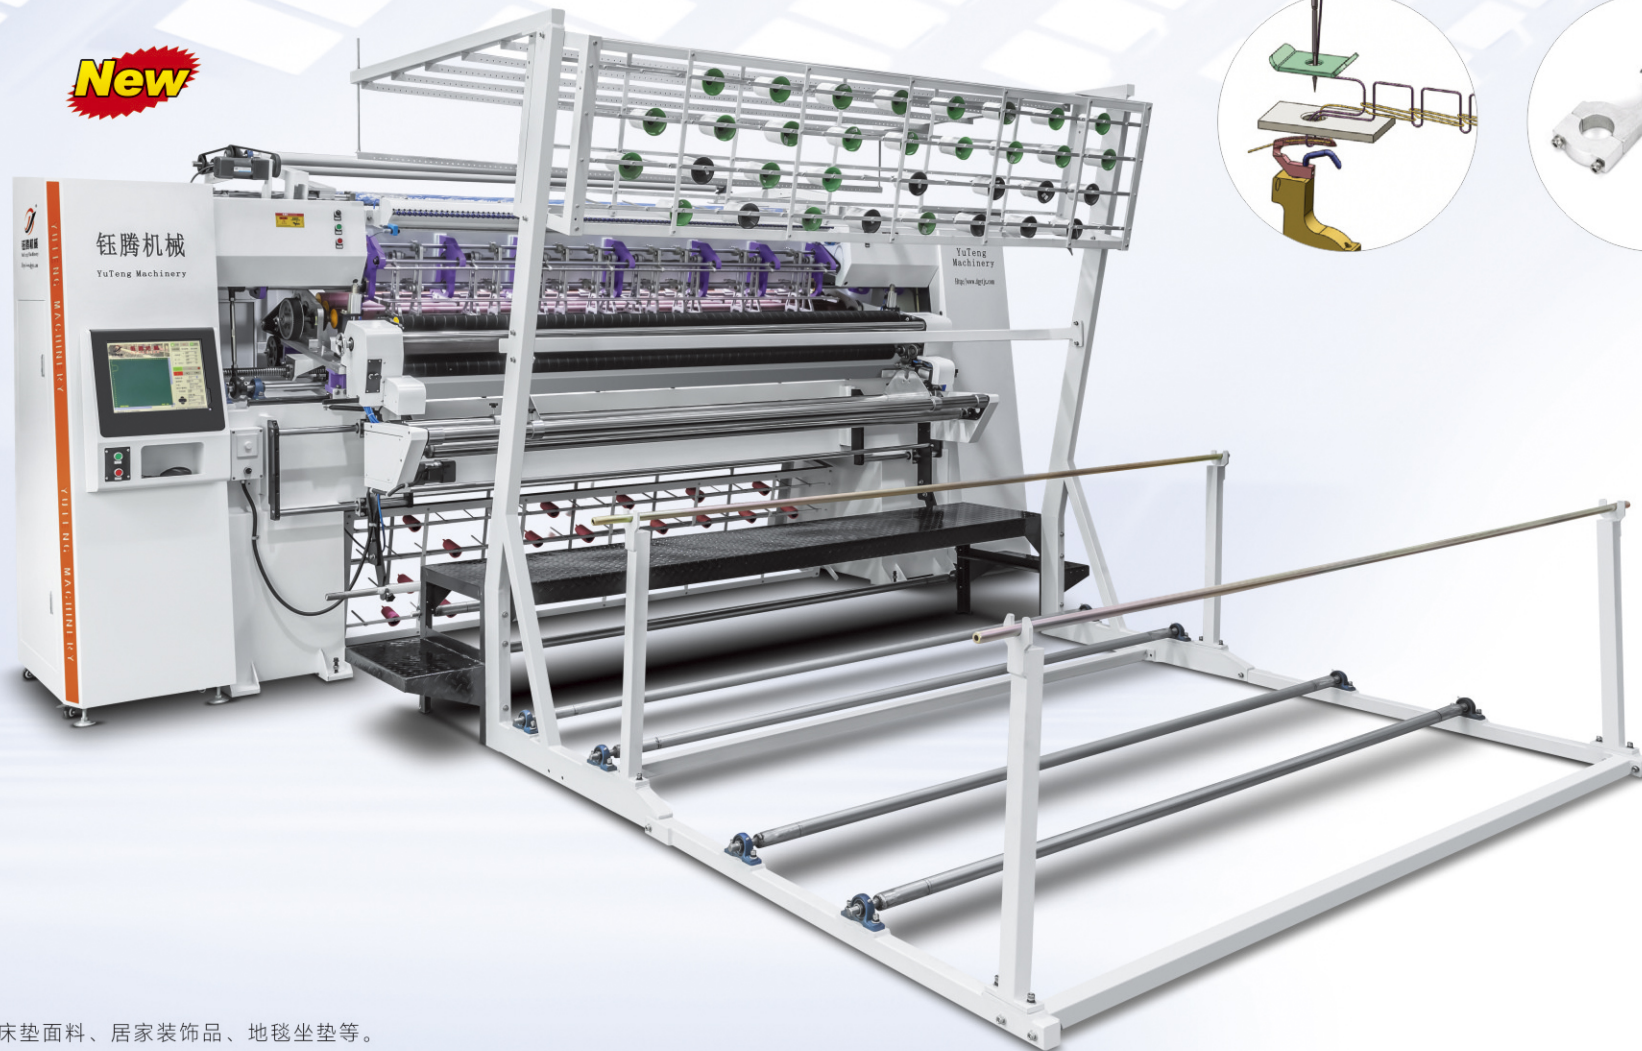

适用范围

用于生产高级床垫面料、居家装饰品、地毯坐垫等。

PURPOSE

Mattress panel, mattress pads, bedspreads, comforters, bedding, blankets, seats covers, decoration, and more.

产品特点 / FEATURES

- 独特的油囊供油润滑设计系统，大大提高了防磨片的使用寿命，减少日常保养周期 (专利结构)。
 - 采用特殊金属材料制成的防磨片，使得拨片架与托板架之间的连接更加平顺、耐磨。
 - 针排、压板运动采用铝合金针杆架、压杆架结构，免加油，坚固耐用。
 - 特有的12.7mm针距设计和加装切刀分条结构，可同时兼有生产床垫围边条的功能。
 - 具有360度任意绗缝和无限次独立花样跨步功能，自动剪线功能。
 - 自主研发“钰腾绗缝系统”，可兼容绣花DST文件，操作简单易懂。
 - 主机配备嵌入式工业电脑和自主研发的运动控制芯片组，响应速度快，使用寿命长，稳定性好。
 - 主轴驱动采用伺服电机，可变速，可正反转，配合软件完成钩子剪线功能。
 - 剪线结构采用国际先进的钩子剪线功能，有效的减少跳机率，提高剪线效率，质量更稳定。
 - 红外线底、面线断线自停检测功能和红外线安全保护作业功能。
- The unique oil bag oil supply lubrication design system greatly improves the service life of the anti-wear sheet and reduces the daily maintenance cycle (Patented structure).
 - The wear-resistant sheet made of special metal material makes the connection between the paddle holder and the pallet holder smoother and more wear-resistant.
 - New aluminum alloy bar and press plate are controlled by a double-swinging device without cam avoiding lubrication and dirtying of material.
 - The unique 12.7mm needle distance design and the addition of a slitting structure with a cutter can simultaneously produce the function of mattress edging.
 - 360°Multi-span and independent patterns, automatic thread trimming function.
 - Self-developed "YuTeng Quilting System", also supports quilting embroidering mainstream DST format file, easy to operation.
 - Computer host adopt the most advanced embedded operating system and self-develop motion control chip, fast response speed, long service life, good stability.
 - Spindle driven by servo motor, it is able to change speed and positive inversion, cooperate with software to complete the slice thread trimming function,
 - The thread trimming structure adopts the international advanced hook thread trimming function, which can effectively reduce the chance of jumping, improve the thread trimming efficiency, and make the quality more stable.
 - Infrared safety protection and Auto-step sensors detection function.


技术参数 / TECHNICAL PARAMETERS

型号	Model	YT-3500A
主机尺寸(长×宽×高)	Dimension (L×W×H)	5200×1600×2300mm
绗缝宽度	Quilting width	2450mm
针排数	Needle rows	3
针排距	Space between needle rows	3"+2" / 3"+3"
针距	Space between needle	25.4mm / 12.7mm
X行程	X-axis movement displacement	305mm (可定制/Customizable)
步长	Stitch length	1-12mm
生产速度	Speed of operation	110-330 (m/hour)
机针型号	Needle model	21#, 22#, 23#, 24#
主轴转速	Quilting speed	100-1400 (r/min)
电压 (AC)	Voltage (AC)	380V / 220V, 3-Phase
功率	Total power	8KW
全机重量	Gross weight	5500KGS
平均耗气量	Average gas consumption	15.5 (L/min)
总耗气量	Total gas consumption	78 (L/hour)

可按客户需求订做特殊机型
 Customized model are available to meet client's various needs




独特的油囊供油系统 (专利结构)
 Unique oil bag oil supply system
 (Patented structure)

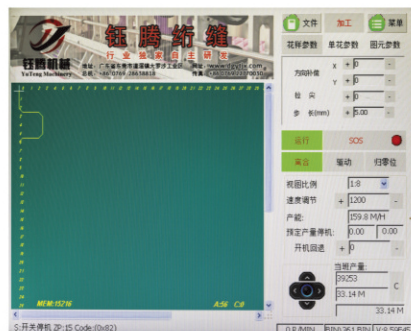

自主研发的绗缝系统
 Self-developed quilting system



铝合金针、压杆架
 Aluminum alloy needle and pressure rod holder

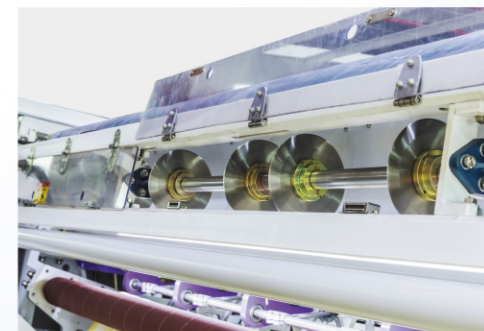


围边条分切结构
 Edge tape cutting structure

YT-3200B

高速电脑无梭多针绗缝机

HIGH-SPEED COMPUTERIZED CHAIN STITCH MULTI-NEEDLE QUILTING MACHINE

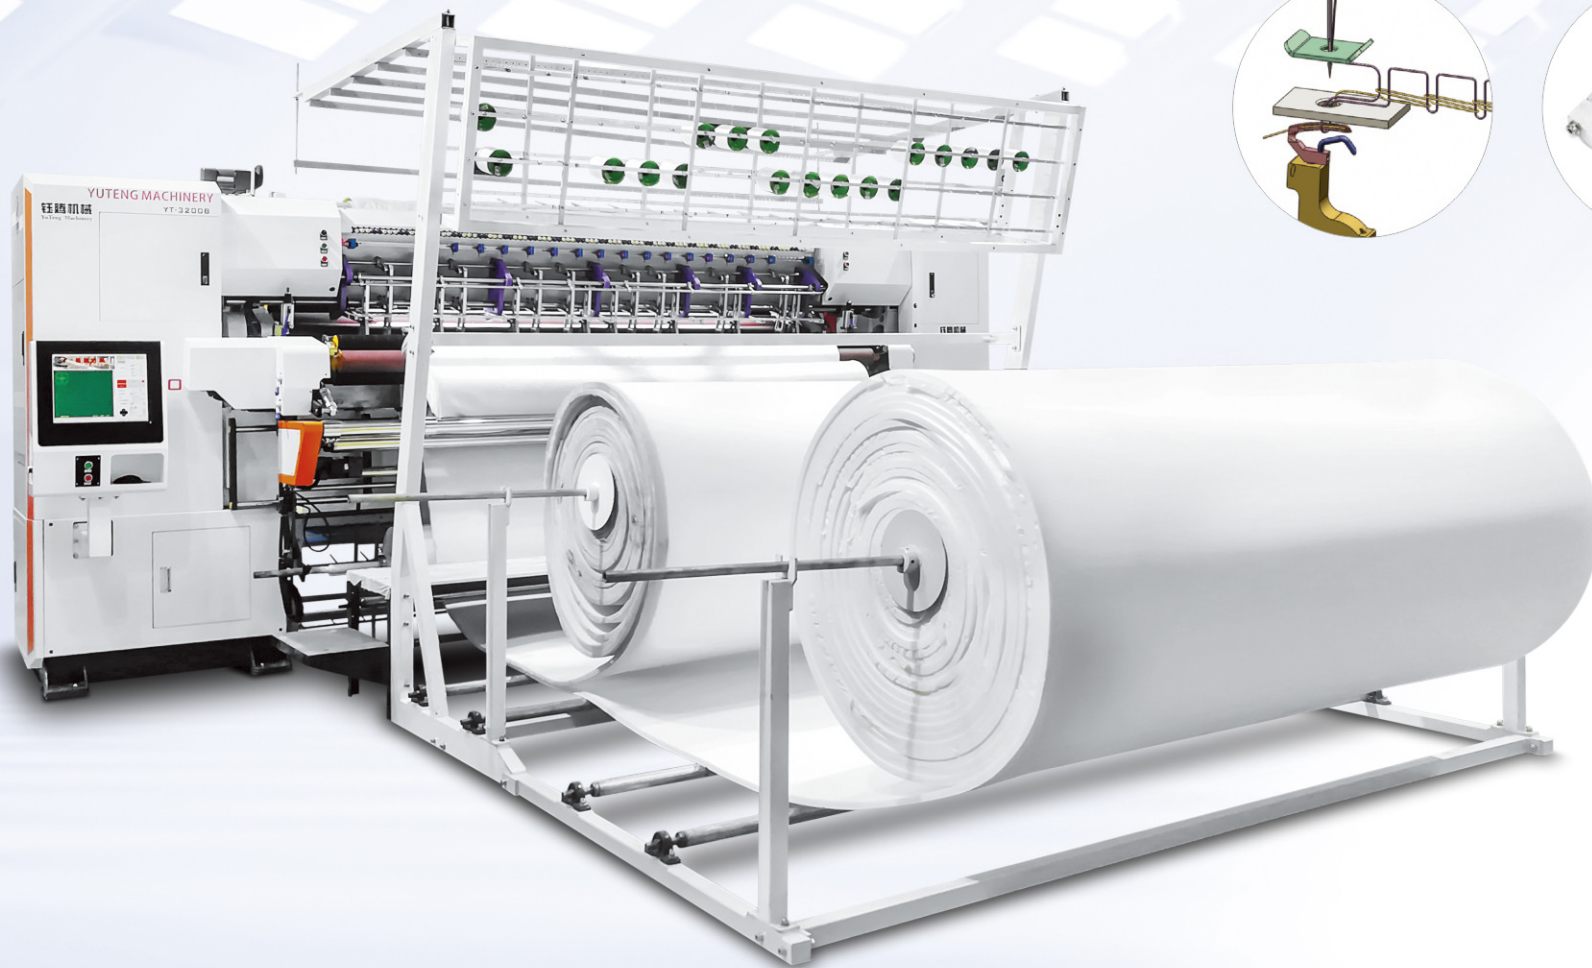

适用范围

用于生产高级床垫面料、居家装饰品、地毯坐垫等。

PURPOSE

Mattress panel, mattress pads, bedspreads, comforters, bedding, blankets, seats covers, decoration, and more.

产品特点 / FEATURES

- 独特的油囊供油润滑设计系统，大大提高了防磨片的使用寿命，减少日常保养周期 (专利结构)。
 - 采用特殊金属材料制成的防磨片，使得拨片架与托板架之间的连接更加平顺、耐磨。
 - 针排、压板运动采用铝合金针杆架、压杆架结构，免加油，坚固耐用。
 - 前罗拉采用伺服电机同步结构，使得独立花型生产更精准，效率更高。
 - 具有360度任意绗缝和无限次独立花样跨步功能，自动剪线功能。
 - 自主研发“钰腾绗缝系统”，可兼容绣花DST文件，操作简单易懂。
 - 主机配备嵌入式工业电脑和自主研发的运动控制芯片组，响应速度快，使用寿命长，稳定性好。
 - 主轴驱动采用伺服电机，可变速，可正反转，配合软件完成钩子剪线功能。
 - 剪线结构采用国际先进的钩子剪线功能，有效的减少跳机率，提高剪线效率，质量更稳定。
 - 红外线底、面线断线自停检测功能和红外线安全保护作业功能。
- The unique oil bag oil supply lubrication design system greatly improves the service life of the anti-wear sheet and reduces the daily maintenance cycle (Patented structure).
 - The wear-resistant sheet made of special metal material makes the connection between the paddle holder and the pallet holder smoother and more wear-resistant.
 - New aluminum alloy bar and press plate are controlled by a double-swinging device without cam avoiding lubrication and dirtying of material.
 - The front roller adopts the synchronous structure of servo motor, which makes the independent pattern production more accurate and more efficient.
 - 360°Multi-span and independent patterns, automatic thread trimming function.
 - Self-developed “YuTeng Quilting System”, also supports quilting embroidering mainstream DST format file, easy to operation.
 - Computer host adopt the most advanced embedded operating system and self-develop motion control chip, fast response speed, long service life, good stability.
 - Spindle driven by servo motor, it is able to change speed and positive inversion, cooperate with software to complete the slice thread trimming function,
 - The thread trimming structure adopts the international advanced hook thread trimming function, which can effectively reduce the chance of jumping, improve the thread trimming efficiency, and make the quality more stable.
 - Infrared safety protection and Auto-step sensors detection function.

技术参数 / TECHNICAL PARAMETERS

型号	Model	YT-3200B
主机尺寸(长×宽×高)	Dimension (L×W×H)	5050×1600×2300mm
绗缝宽度	Quilting width	2450mm
针排数	Needle rows	3
针排距	Space between needle rows	3"+2" / 3"+3"
针距	Space between needle	25.4mm
X行程	X-axis movement displacement	305mm
绗缝厚度	Thickness of quilting	80mm
步长	Stitch length	1-12mm
生产速度	Speed of operation	60-230 (m/hour)
机针型号	Needle model	21#, 22#, 23#, 24#
主轴转速	Quilting speed	100-1200 (r/min)
电压 (AC)	Voltage (AC)	380V / 220V, 3-Phase
功率	Total power	8KW
全机重量	Gross weight	5500KGS
平均耗气量	Average gas consumption	13.8 (L/min)
总耗气量	Total gas consumption	69.5 (L/hour)


可按客户需求订做特殊机型
 Customized model are available to meet client's various needs




独特的油囊供油系统 (专利结构)
 Unique oil bag oil supply system
 (Patented structure)



铝合金针、压杆架
 Aluminum alloy needle and pressure rod holder

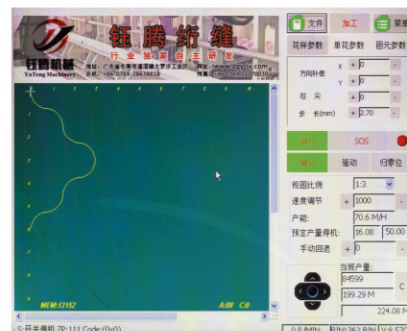

自主研发的绗缝系统
 Self-developed quilting system

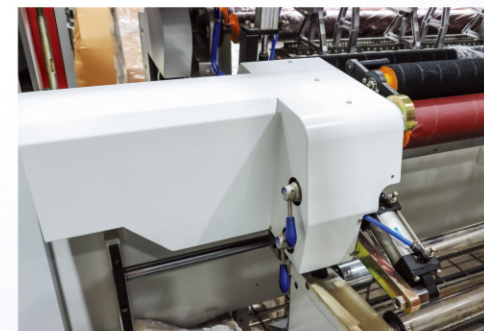


前罗拉伺服同步结构
 Front roller servo synchronization structure

YT-3000A

高速电脑无梭多针绗缝机

HIGH-SPEED COMPUTERIZED CHAIN STITCH MULTI-NEEDLE QUILTING MACHINE

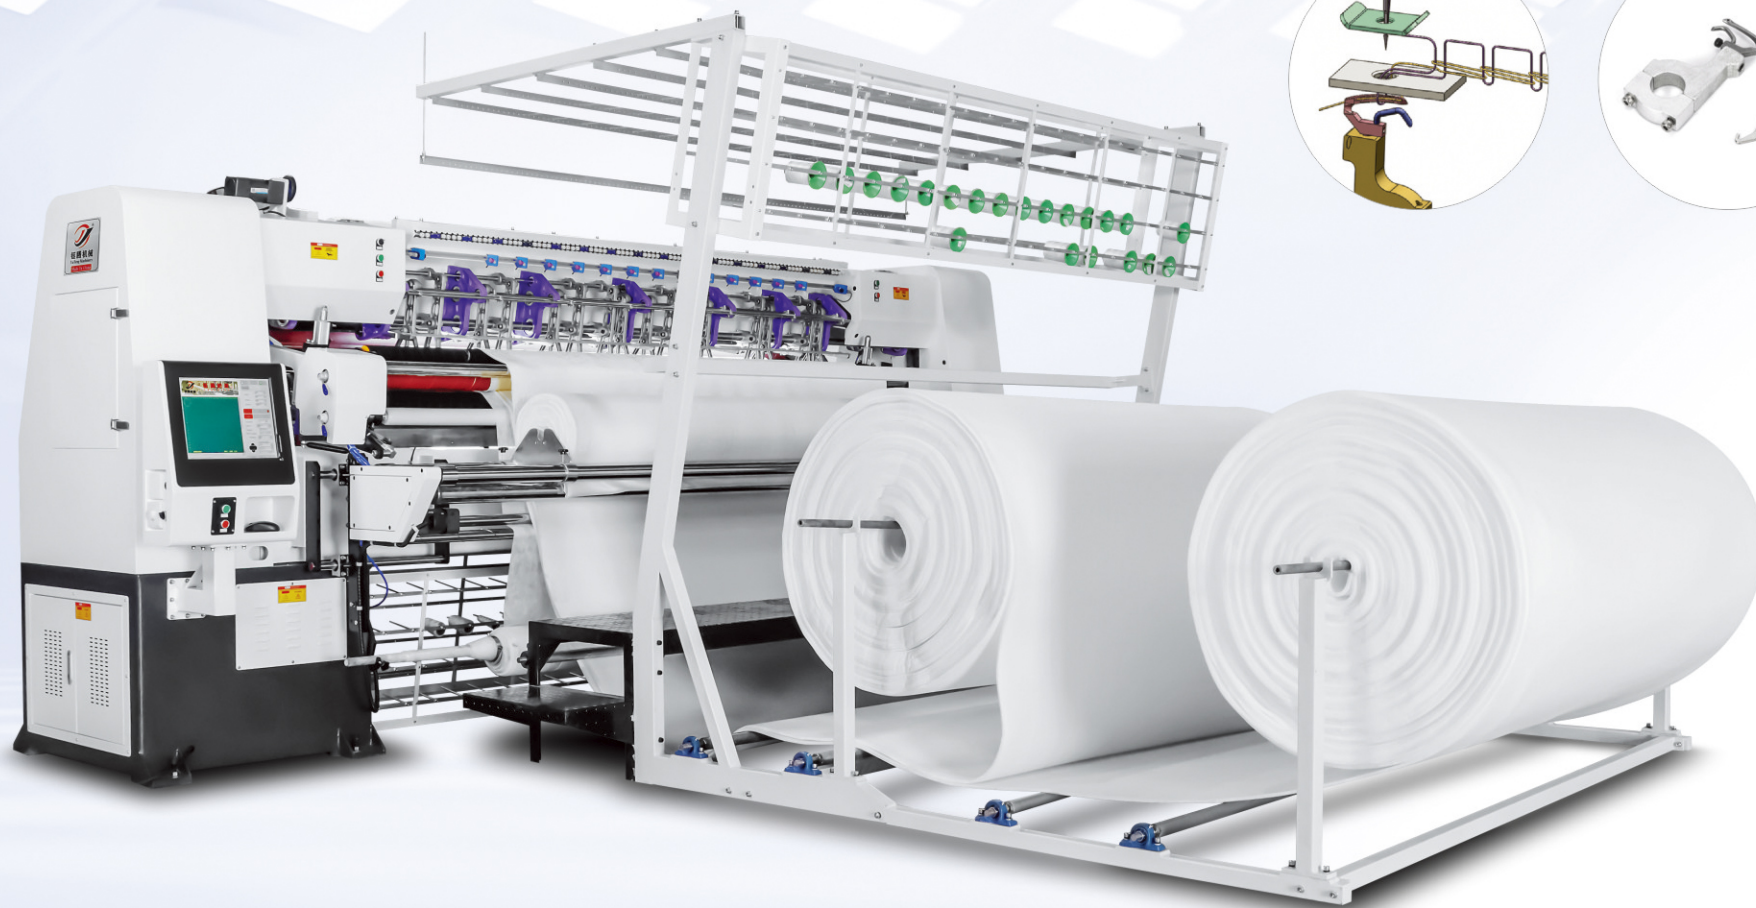

适用范围

用于生产高级床垫面料、居家装饰品、地毯坐垫等。

PURPOSE

Mattress panel, mattress pads, bedspreads, comforters, bedding, blankets, seats covers, decoration, and more.

产品特点 / FEATURES

- 独特的油囊供油润滑设计系统，大大提高了防磨片的使用寿命，减少日常保养周期 (专利结构)。
 - 采用特殊金属材料制成的防磨片，使得拨片架与托板架之间的连接更加平顺、耐磨。
 - 针排、压板运动采用铝合金针杆架、压杆架结构，免加油，坚固耐用。
 - 采用高强度材料的托板，上下超大高度，使用更稳定，操作更便捷。
 - 具有360度任意绗缝和无限次独立花样跨步功能，自动剪线功能。
 - 自主研发“钰腾绗缝系统”，可兼容绣花DST文件，操作简单易懂。
 - 主机配备嵌入式工业电脑和自主研发的运动控制芯片组，响应速度快，使用寿命长，稳定性好。
 - 主轴驱动采用伺服电机，可变速，可正反转，配合软件完成钩子剪线功能。
 - 剪线结构采用国际先进的钩子剪线功能，有效的减少跳机率，提高剪线效率，质量更稳定。红外线底、面线断线自停检测功能和红外线安全保护作业功能。
- The unique oil bag oil supply lubrication design system greatly improves the service life of the anti-wear sheet and reduces the daily maintenance cycle (Patented structure).
 - The wear-resistant sheet made of special metal material makes the connection between the paddle holder and the pallet holder smoother and more wear-resistant.
 - New aluminum alloy bar and press plate are controlled by a double-swinging device without cam avoiding lubrication and dirtying of material.
 - The pallet is made of high-strength materials, and the upper and lower heights are super large, which is more stable in use and more convenient in operation.
 - 360°Multi-span and independent patterns, automatic thread trimming function.
 - Self-developed "YuTeng Quilting System", also supports quilting embroidering mainstream DST format file, easy to operation.
 - Computer host adopt the most advanced embedded operating system and self-develop motion control chip, fast response speed, long service life, good stability.
 - Spindle driven by servo motor, it is able to change speed and positive inversion, cooperate with software to complete the slice thread trimming function,
 - The thread trimming structure adopts the international advanced hook thread trimming function, which can effectively reduce the chance of jumping, improve the thread trimming efficiency, and make the quality more stable.
 - Infrared safety protection and Auto-step sensors detection function.

技术参数 / TECHNICAL PARAMETERS

型号	Model	YT-3000A
主机尺寸(长×宽×高)	Dimension (L×W×H)	5000×1600×2300mm
绗缝宽度	Quilting width	2450mm
针排数	Needle rows	3
针排距	Space between needle rows	3"+2" / 3"+3"
针距	Space between needle	25.4mm
X行程	X-axis movement displacement	305mm
绗缝厚度	Thickness of quilting	80mm
步长	Stitch length	1-12mm
生产速度	Speed of operation	60-230 (m/hour)
机针型号	Needle model	21#, 22#, 23#, 24#
主轴转速	Quilting speed	100-1000 (r/min)
电压 (AC)	Voltage (AC)	380V / 220V, 3-Phase
功率	Total power	8KW
全机重量	Gross weight	5500KGS
平均耗气量	Average gas consumption	13.8 (L/min)
总耗气量	Total gas consumption	69.5 (L/hour)


可按客户需求订做特殊机型
 Customized model are available to meet client's various needs



独特的油囊供油系统
 Unique oil bag oil supply system



铝合金针、压杆架
 Aluminum alloy needle and pressure rod holder

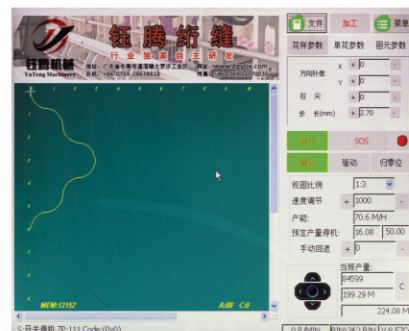

自主研发的绗缝系统
 Self-developed quilting system



舒适的操作空间
 Comfortable operating space

YGH SERIES

超高速电脑有梭多针绗缝机

ULTRA HIGH-SPEED COMPUTERIZED LOCK STITCH MULTI-NEEDLE QUILTING MACHINE



适用范围

用于生产服装、床上用品、纺织品、皮革、鞋、帽、手套、箱包、睡袋、手袋、沙发坐垫、墙壁装饰品等。

PURPOSE

It is widely used for quilting high-quality garments, bedding covers, textile, leather, shoes, cap, bags, vanity, gloves, sleeping bag, seat cover and wall decoration etc.


产品特点 / FEATURES

- 全面升级强化各传动结构，真正实现高速运转，稳定生产。
- 外置电脑控制系统，有效减少高速运转给电控带来的不良影响。
- 电脑可调节速度100-1400转/分钟，针步调节2-12mm。
- 设备运行中可任意调节速度、针步以及各种花型补偿功能。
- 系统设有“回退”功能，解决加工换梭之间的漏绗、补针工作。
- 针排运动采用伺服驱动方式，主轴采用变频控制。
- 双离合装置，有效解决前后罗拉同步问题。
- 360度任意绗缝和无限次独立花样跨步绗缝。
- 面线断线自动停机功能，红外线感应使操作更安全。
- Comprehensively upgrade and strengthen each transmission structure to truly realize high-speed operation and stable production.
- The external computer control system can effectively reduce the adverse effects of high-speed operation on the electronic control.
- The computer can adjust the speed of 100-1400 rpm, and the stitch adjustment is 2-12mm.
- The speed, stitch and various pattern compensation functions can be adjusted arbitrarily during the operation of the equipment.
- The system is equipped with a "return" function to solve the work of missing quilting and stitching between processing and changing shuttles.
- The needle row movement adopts servo drive mode, and the spindle adopts frequency conversion control.
- Dual clutch device, to solve the synchronization problem of rollers in front and back.
- 360 degree free quilting come with unlimited multi-span quilting independent patterns.
- Automatic thread-break detection unit. Infrared sensor make sure more safety operation.

技术参数 / TECHNICAL PARAMETERS

型号	Model	64 Series		80 Series		96 Series	
		64-2-3(S/B)	64-3-4/4.5/5/6(S/B)	80-2-3(S/B)	80-3-4/4.5/5/6(S/B)	96-2-3(S/B)	96-3-4/4.5/5/6(S/B)
主机尺寸(长×宽×高)	Dimension (L×W×H)	3950×1400×1800mm	3950×1400×1800mm	4250×1400×1800mm	4250×1400×1800mm	4900×1400×1800mm	4900×1400×1800mm
绗缝宽度	Quilting width	1650mm	1650mm	2000mm	2000mm	2450mm	2450mm
针排数	The number of needle rows	2	3	2	3	2	3
针排距	Space between needle rows	3"	3"+1"/1.5"/2"/3"	3"	3"+1"/1.5"/2"/3"	3"	3"+1"/1.5"/2"/3"
针距	Space between needle	25.4mm	19.05/25.4mm	25.4mm	25.4mm	25.4mm	25.4mm
X行程	X-axis travel	203.2mm	228.6mm/228.6mm/304.8mm	203.2mm	304.8mm	254mm	304.8mm
绗缝厚度	Thickness of quilting	25mm	25mm	25mm	25mm	25mm	25mm
步长	Stitch length	2-12mm	2-12mm	2-12mm	2-12mm	2-12mm	2-12mm
生产速度(米/时)	Production speed (m/hour)	20-200	20-200	20-200	20-200	20-200mm	20-200mm
梭子型号	Shuttle model	7#/10#	7#/10#	7#/10#	7#/10#	7#/10#	7#/10#
机针型号	Needle model	14#, 16#, 19#	14#, 16#, 19#	14#, 16#, 19#	14#, 16#, 19#	14#, 16#, 19#	14#, 16#, 19#
主轴转速(转/分钟)	Quilting speed (r/min)	100-1400	100-1400	100-1400	100-1400	100-1400	100-1400
电压(AC)	Voltage (AC)	380V / 220V, 3-Phase	380V / 220V, 3-Phase	380V / 220V, 3-Phase	380V / 220V, 3-Phase	380V / 220V, 3-Phase	380V / 220V, 3-Phase
功率	Total power	3.5KW	3.5KW	3.5KW	3.5KW	5.5KW	5.5KW
全机重量	Gross weight	3200Kg	3200Kg	3650Kg	3650Kg	4250Kg	4250Kg

可按客户需求订做特殊机型 / Customized model are available to meet client's various needs



YGB SERIES

高速电脑有梭多针绗缝机

HIGH-SPEED COMPUTERIZED LOCK STITCH MULTI-NEEDLE QUILTING MACHINE

适用范围

用于生产服装、床上用品、纺织品、皮革、鞋、帽、手套、箱包、睡袋、手袋、沙发坐垫、墙壁装饰品等。

PURPOSE

It is widely used for quilting high-quality garments, bedding covers, textile, leather, shoes, cap, bags, vanity, gloves, sleeping bag, seat cover and wall decoration etc.



产品特点 / FEATURES





- 电脑可调节速度100-1000转/分钟，针步调节2-12mm。
- 针排运动采用伺服驱动方式，主轴采用变频控制。
- 鞍架采用绗缝机的高刚性设计，底面布支架采用与鞍架分离的结构，有效减少鞍架电机的负载。
- 双离合装置，有效解决前后罗拉同步问题。
- 采用高精度、高刚性进口丝杆。
- 360度任意绗缝和无限次独立花样跨步绗缝。
- 面线断线自动停机功能。
- 红外线感应使操作更安全。
- 机器运行平稳，噪声小，精度高，断线率低、操作简易。

- The computer can adjust the speed of 100-1000 rpm, and the stitch adjustment is 2-12mm.
- Needle row driven by aluminum alloy needle bar frame structure.Oil free, sturdy and durable.
- Saddles and rollers driven by servo drive equipment, spindle adopts frequency conversion control.
- Saddles using quilting machine with high rigidity design. The stand of fabric separate from saddles, effectively reduce the operating load of motor.
- Dual clutch device, to solve the synchronization problem of rollers in front and back.
- Using high-precision and high rigidity imported screw mandrel.
- 360 degree free quilting come with unlimited multi-span quilting independent patterns.
- Automatic thread-break detection unit.
- Infrared sensor make sure more safety operation.
- The machine runs smoothly, low noise, high precision, low thread-break rate and easy to operate.

技术参数 / TECHNICAL PARAMETERS

型号	Model	64 Series		80 Series		96 Series		128 Series
		64-2-3(S/B)	64-3-4/ 4.5/5/6(S/B)	80-2-3(S/B)	80-3-4/4.5/5/6(S/B)	96-2-3(S/B)	96-3-4/4.5/5/6(S/B)	128-2-3/6(S/B)
主机尺寸(长×宽×高)	Dimension (L×W×H)	3800×1200×1800mm	3800×1200×1800mm	4400×1200×1800mm	4400×1200×1800mm	4800×1200×1800mm	4800×1200×1800mm	5700×1200×1800mm
绗缝宽度	Quilting width	1650mm	1650mm	2000mm	2000mm	2450mm	2450mm	3300mm
针排数	The number of needle rows	2	3	2	3	2	3	2/3
针排距	Space between needle rows	3"	3"+1"/1.5"/2"/3"	3"+1"/1.5"/2"/3"	3"+1"/1.5"/2"/3"	3"	3"+1"/1.5"/2"/3"	3"/3+3
针距	Space between needle	25.4mm	19.05/25.4mm	25.4mm	25.4mm	25.4mm	25.4mm	25.4mm
X行程	X-axis travel	203.2mm	228.6/228.6/304.8mm	203.2mm	304.8mm	254mm	304.8mm	254/304.8mm
绗缝厚度	Thickness of quilting	25mm	25mm	25mm	25mm	25mm	25mm	25mm
步长	Stitch length	2-12mm	2-12mm	2-12mm	2-12mm	2-12mm	2-12mm	2-12mm
生产速度 (米/时)	Production speed (m/hour)	20-160	20-160	20-160	20-160	20-160	20-160	20-160
梭子型号	Shuttle model	7#/10#	7#/10#	7#/10#	7#/10#	7#/10#	7#/10#	7#/10#
机针型号	Needle model	14#, 16#, 19#	14#, 16#, 19#	14#, 16#, 19#	14#, 16#, 19#	14#, 16#, 19#	14#, 16#, 19#	14#, 16#, 19#
主轴转速 (转/分钟)	Quilting speed (r/min)	100-1000	100-1000	100-1000	100-1000	100-1000	100-1000	100-1000
电压 (AC)	Voltage (AC)	380V / 220V, 3-Phase	380V / 220V, 3-Phase	380V / 220V, 3-Phase	380V / 220V, 3-Phase	380V / 220V, 3-Phase	380V / 220V, 3-Phase	380V / 220V, 3-Phase
功率	Total power	3.5KW	3.5KW	3.5KW	3.5KW	5.5KW	5.5KW	7.5KW
全机重量	Gross weight	3300Kg	3300Kg	3800Kg	3800Kg	4500Kg	4500Kg	5300Kg


可按客户需求订做特殊机型 / Customized model are available to meet client's various needs



X64 / X96

高速电脑双排旋梭绗缝绣一体机

HIGH-SPEED COMPUTERIZED DOUBLE-ROW QUILTING AND EMBROIDERY MACHINE

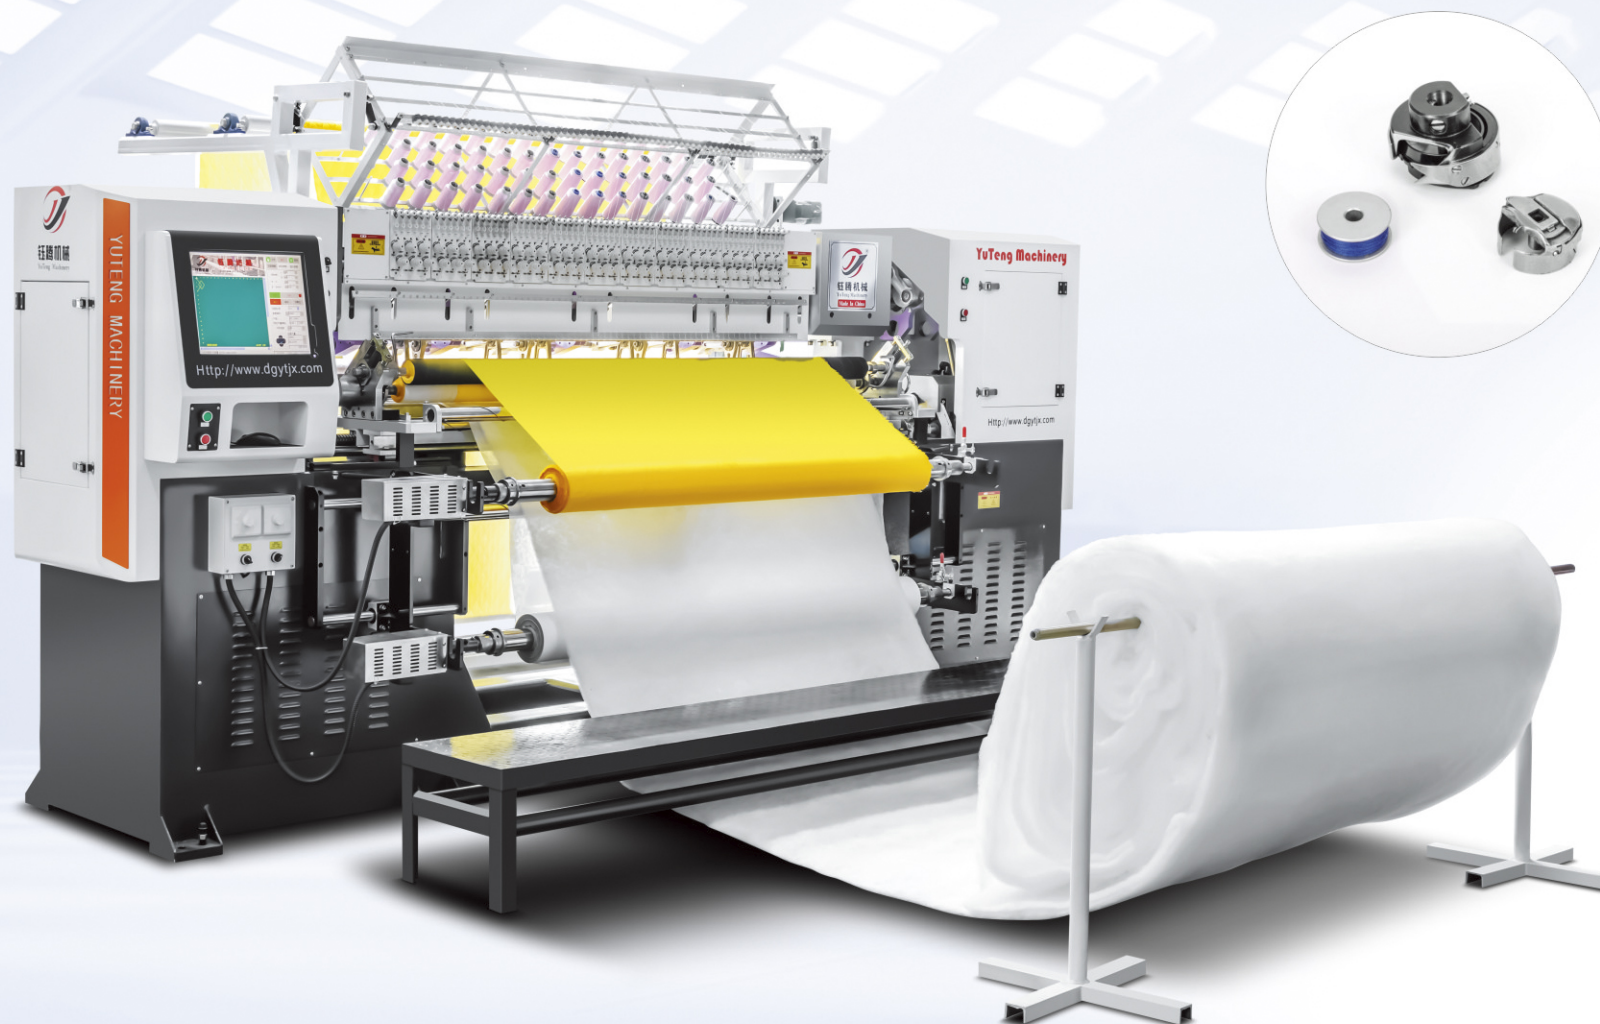

适用范围

用于生产服装、床上用品、纺织品、皮革、鞋、帽、手套、箱包、睡袋、手袋、沙发坐垫、墙壁装饰品等。

PURPOSE

It is widely used for quilting high-quality garments, bedding covers, textile, leather, shoes, cap, bags, vanity, gloves, sleeping bag, seat cover and wall decoration etc.

产品特点 / FEATURES

- 兼容绗绣机和绗缝机的功能，即可一机两用。
- 独立自主研发的“钰腾绗缝”操作系统，配备目前市场上最先进的嵌入式操作系统和自主研发的运动控制芯片组，主机响应速度快，使用寿命长，稳定性好，操作画图更简单、实用。
- 可兼容绣花机的DST花样文件，并可随意自编花形打样制作。
- 具有断线后可回针补线功能，重线精度高。
- 前排针位可错位移动一英寸，提供更多的花形组合。
- 鞍架、罗拉和主轴驱动分别独立采用伺服电机驱动。
- 针排运动结构采用铝合金针杆架，免加油系统，坚固耐用。
- 底面布上布料架与移动鞍架结构分离，有效减少鞍架电机负荷和抖动。
- 双离合紧布装置，有效解决前后罗拉同步问题。
- 底线、面线设有高灵敏度的断线自停保护装置。
- 红外线感应保护装置，使操作更安全、放心。
- 独特的三根罗拉设计理念，使花型和线迹更美观，更精确，更稳定。
- 超大舒适的换梭操作空间，简便的上布与出布结构。
- Quilting and embroidery is completed together.
- Independent research and development of the operating system, with the latest embedded operating system and self-researched motion control chips on the market, the main frame response quickly, with long life and good stability, easy drawing and useful.
- Compatible with embroidery machine DST files pattern, and optional feature for proofing production.
- Auto-return for patch-up embroidery function.
- Can move an inch in front of the needle bar, and provide more combination of flowers form.
- Saddling rack, roller and spindle are drive by servo motor.
- The needle bar running adopt aluminum alloy needle bar frame structure, don't need to add extra lube, strong and durable.
- Adopt separation structure of convey cloth rack and moving saddling rack, effectively reduce the load and jitter of saddling rack.
- Adopt double clutch device, effectively solve the synchronization problems of (Front and back) rollers.
- Advanced and practical testing bottom and upper thread broken techniques, the machine is auto-stop when thread is broken.
- Infrared sensor makes the operation more secure.
- Unique design concept of three rollers, make the flower shape box line more beautiful, more stable running Super comfortable space for changing shuttle, easy to convey cloth.


技术参数 / TECHNICAL PARAMETERS

型号	Model	X64	X96
主机尺寸(长×宽×高)	Dimension (L×W×H)	4100×1400×2350mm	4900×1400×2350mm
绗缝宽度	Quilting width	1651mm	2388mm
针排数	The number of needle rows	2	2
针排距	Space between needle rows	3"	3"
针距	Space between needle	50.8mm / 67.5mm	50.8mm / 67.5mm
X行程	X-axis travel	200mm (可定制/Customizable)	280mm (可定制/Customizable)
步长	Stitch length	1-12.7mm	1-12.7mm
机针型号	Needle model	9#-16#	9#-16#
主轴转速 (转/分钟)	Quilting speed (r/min)	100-1000	100-1000
电压 (AC)	Voltage (AC)	380V / 220V, 3-Phase	380V / 220V, 3-Phase
功率	Total power	4.5KW	5.5KW
全机重量	Gross weight	2600Kg	3850Kg


可按客户需求订做特殊机型 / Customized model are available to meet client's various needs



铝合金针、压杆架
Aluminum alloy needle
and pressure rod holder

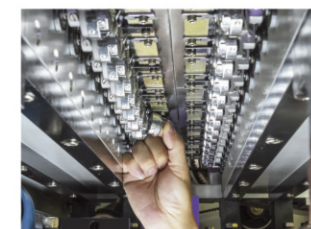

双排旋梭设计
Double row rotary
shuttle design

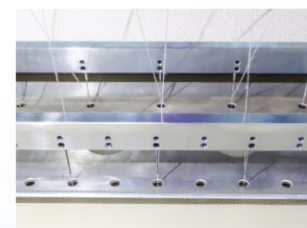

梭床可错位调节
Shuttle bed can be adjusted
by dislocation



舒适的换梭空间
Comfortable shuttle
changing space


YTX2 SERIES

高速电脑分段绗绣一体机

HIGH-SPEED COMPUTERIZED SEGMENTED QUILTING AND EMBROIDERY MACHINE

该系列机型可满足2匹面料同时加工
(宽度1700mm以内)


This series of models can process
2 pieces of fabric at the same time
(within a width of 1700mm)

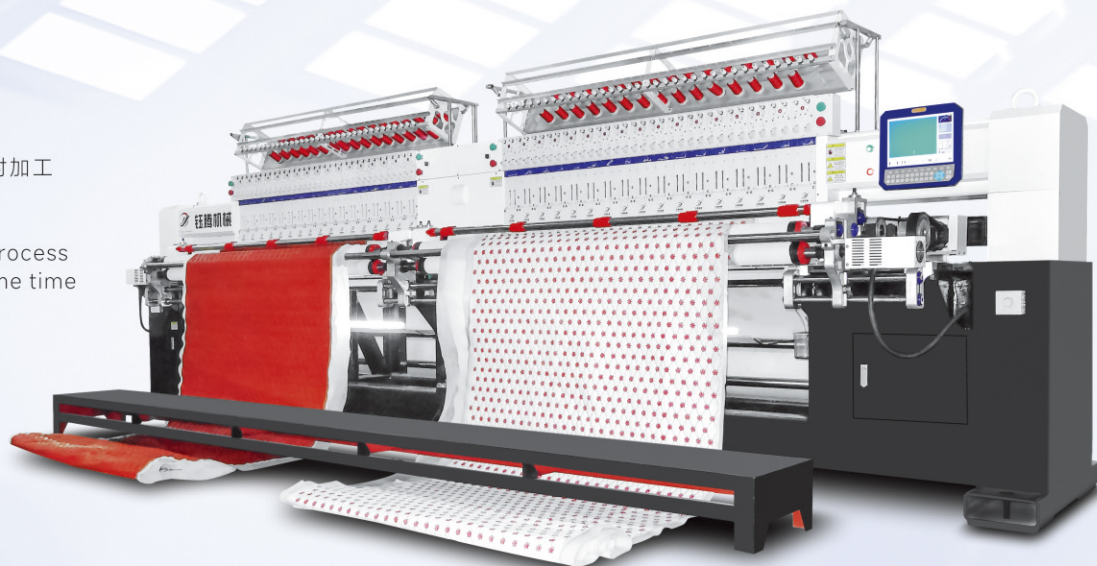

适用范围 / PURPOSE

用于生产服装、床上用品、纺织品、皮革、鞋、帽、手套、箱包、睡袋、手袋、沙发坐垫、墙壁装饰品等。

It is widely used for quilting high-quality garments, bedding covers, textile, leather, shoes, cap, bags, vanity, gloves, sleeping bag, seat cover and wall decoration etc.



技术参数 / TECHNICAL PARAMETERS

型号	Model	YTX2-34F	YTX2-26F
机器尺寸 (长×宽×高)	Dimension (L×W×H)	6000×1500×2100mm	6050×1500×2100mm
绗缝宽度	Quilting width	1700mm+1700mm	1700mm+1700mm
针/头	Needle / Head	2	2
头	Heads	17+17	13+13
针距	Space between needle	50.8mm	67.5mm
针步长度	Stitch length	1mm-12.7mm	1mm-12.7mm
机针型号	Needle model	9#-16#	9#-16#
绗缝速度	Quilting speed (rpm)	100-1000	100-1000
电压 (AC)	Voltage (AC)	380V / 220V, 3-Phase	380V / 220V, 3-Phase
总功率	Total power	5.5KW	5.5KW
总重量	Gross weight	3500KGS	3500KGS

可按客户需求订做特殊机型 Customized model are available to meet client's various needs

YT SERIES

高速电脑绗绣一体机

HIGH-SPEED COMPUTERIZED QUILTING AND EMBROIDERY MACHINE

该系列机型可满足宽度3300mm以内的面料加工

This series of models can meet the processing of fabrics with a width of less than 3300mm



适用范围 / PURPOSE

用于生产服装、床上用品、纺织品、皮革、鞋、帽、手套、箱包、睡袋、手袋、沙发坐垫、墙壁装饰品等。

It is widely used for quilting high-quality garments, bedding covers, textile, leather, shoes, cap, bags, vanity, gloves, sleeping bag, seat cover and wall decoration etc.



技术参数 / TECHNICAL PARAMETERS

型号	Model	YT-1330H	YT-1250H
机器尺寸 (长×宽×高)	Dimension (L×W×H)	5300×1500×2100mm	5300×1500×2100mm
绗缝宽度	Quilting width	3300mm	3300mm
针/头	Needle / Head	2	2
头	Heads	33	25
针距	Space between needle	50.8mm	67.5mm
针步长度	Stitch length	1mm-12.7mm	1mm-12.7mm
机针型号	Needle model	9#-16#	9#-16#
绗缝速度	Quilting speed (rpm)	100-1000	100-1000
电压 (AC)	Voltage (AC)	380V / 220V, 3-Phase	380V / 220V, 3-Phase
总功率	Total power	5.5KW	5.5KW
总重量	Gross weight	3500KGS	3500KGS

可按客户需求订做特殊机型 Customized model are available to meet client's various needs

YTCM96-H

电脑智能裁剪机

COMPUTERIZED PANEL CUTTER MACHINE



分条刀 / Slitting



边刀 / Edge cutting

适用范围 / PURPOSE

适用于床垫面料加工的横切、分条、裁边绗缝产品，适合与绗缝机+卷布装备配套使用，也可以单独使用。

For mattress, seat covers, sofa cushions, quilt covers, bedcovers, home decoration, export packaging, bedding processing, automatic cutting after sewing, etc. For cross-cutting, slitting, edge cutting, quilting products, composite products, can also be used alone.


技术参数 / TECHNICAL PARAMETERS

主机尺寸(长×宽×高)	Machine size (L×W×H)	3900×1300×2300(mm)
裁剪长度	Cutting length	600-2100mm或无限长 / 600-2100mm or unlimited
裁剪宽度	Cutting width	80-2600 mm
裁剪厚度	Cutting thickness	≤60 mm
裁剪速度	Cutting speed	10m/minute
最大功率	Max power	3.2KW
工作气压	Air pressure	0.4-0.8Mpa
工作电压	Voltage	380V / 220V, 3-Phase
机器重量	Machine weight	1150Kg


YTCM-C SERIES

电脑智能裁剪机


COMPUTERIZED PANEL CUTTER MACHINE

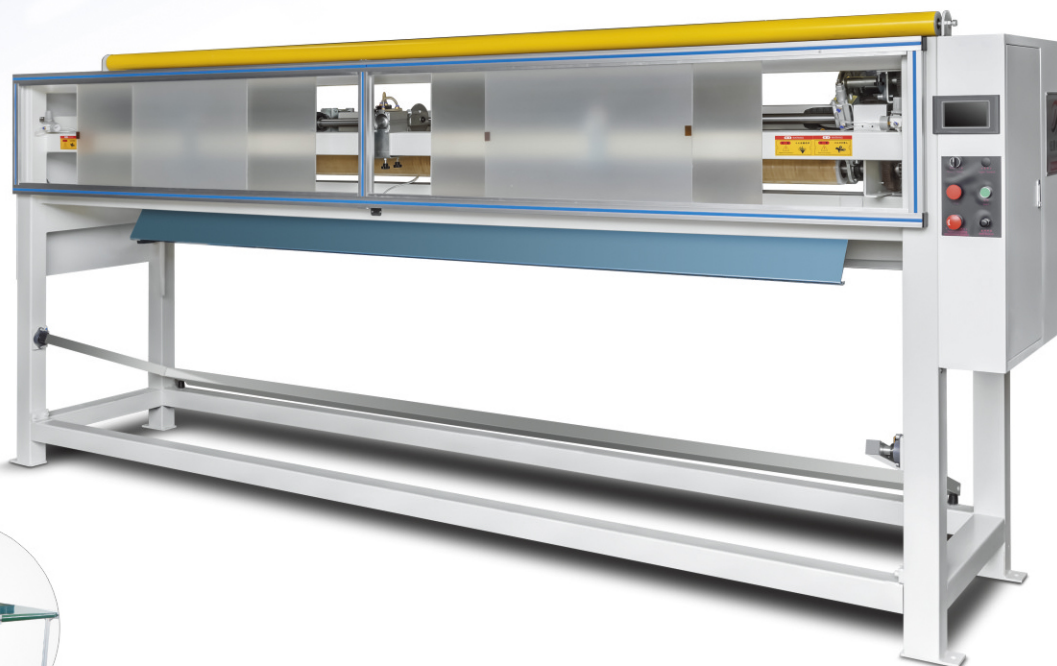

输送平台(选配)
Conveying platform (optional)

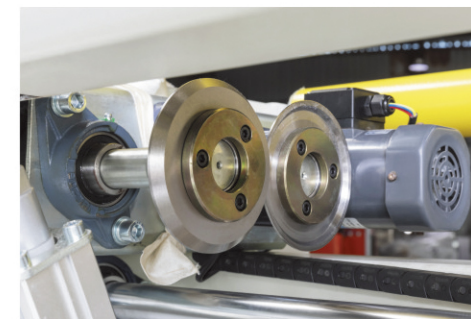

边刀 / Edge cutting

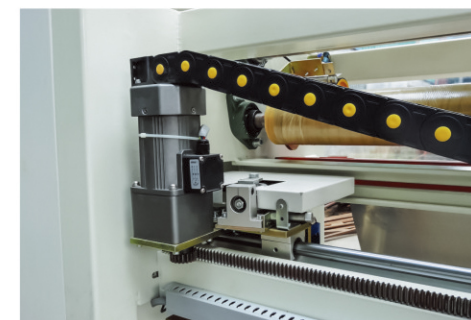

横切刀 / Crosscutting

适用范围 / PURPOSE

适用于家纺产品的横切、分条、裁边绗缝产品，适合与绗缝机+卷布装备配套使用，也可以单独使用。

It is suitable for cross-cutting, slitting and trimming quilting products of home textile products. It is suitable for use with quilting machine + cloth rolling equipment, or can be used alone.

技术参数 / TECHNICAL PARAMETERS

主机尺寸(长×宽×高)	Machine size (L×W×H)	3350×850×1800mm
裁剪宽度	Cutting width	2400mm (可定做 / Can be customized)
裁剪长度	Cutting length	最小30mm, 最长(无限长) / Min 30mm - Infinite
裁剪速度	Cutting speed	卷布10m/分钟, 横切5m/刀 (Vertical cut 10m/m, horizontal cut 5s/cut)
机器重量	Machine weight	600Kg
最大功率	Max power	1.8KW
工作电压	Voltage	380V / 220V, 3-Phase

定制类机械 CUSTOMIZED MACHINERY



5.6米无梭多针绗缝机
5.6m Chain Stitch Multi-needle Quilting Machine

可根据客户需求定制任意规格的机器，为不同的行业量身定制。
We can customize machines of any specification according to customers' needs and tailor them to different industries.



0.8米围边条无梭多针绗缝机
0.8m Edge Tape Chain Stitch Multi-needle Quilting Machine



8mm/12.7mm 密道有梭多针绗缝机
8mm/12.7mm Dense Stitch Lock Stitch Multi-needle Quilting Machine

辅助类机械

AUXILIARY MACHINERY



BOBBIN WINDER MACHINE

绕线机

机器尺寸 (长×宽×高)	Dimension (L×W×H)	550×450×1500mm
绕线速度 (转/分钟)	Wind speed (rpm/min)	1400
额定功率	Power	0.37KW
电压 (AC)	Voltage (AC)	380V / 220V, 3-Phase
重量	Gross weight	85Kg



ROLLER MACHINE

成品卷布机

机器尺寸 (长×宽×高)	Dimension (L×W×H)	3500×710×1500mm
卷布速度 (米/分钟)	Rolling speed (m/min)	15
卷布宽度	Rolling width	2500mm
电机功率	Power	0.2KW
电压 (AC)	Voltage (AC)	380V / 220V, 3-Phase
重量	Gross weight	200Kg



无梭机花样展示

CHAIN STITCH MULTI-NEEDLE QUILTING SAMPLES







有梭机花样展示

LOCK STITCH MULTI-NEEDLE QUILTING SAMPLES

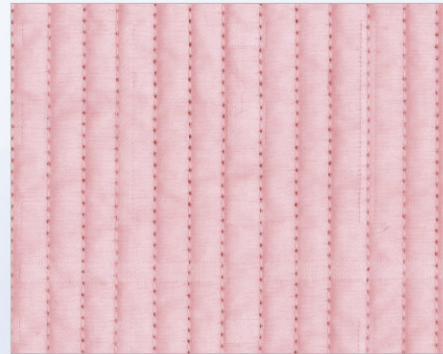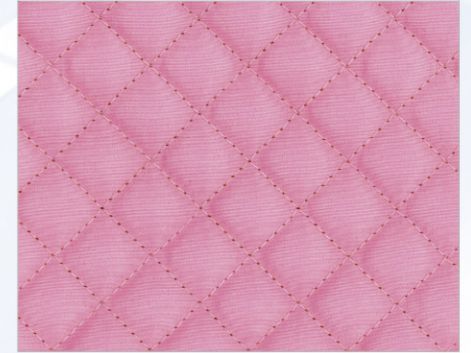



双排旋梭机花样展示

DOUBLE-ROW QUILTING AND EMBROIDERY QUILTING SAMPLES

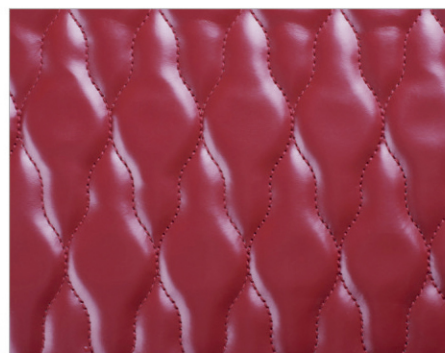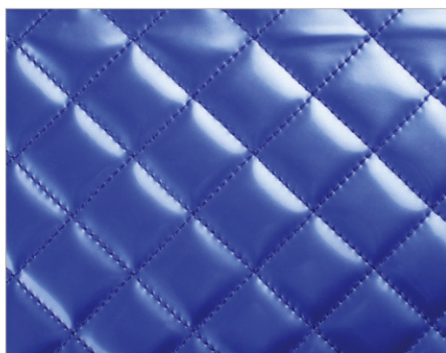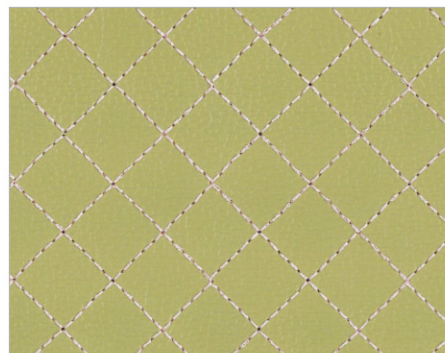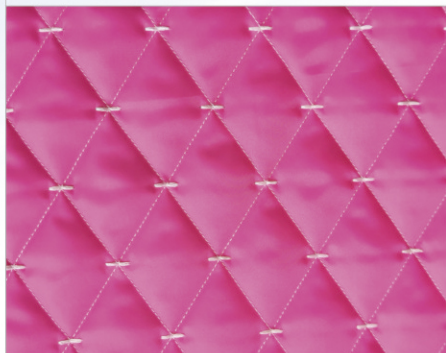

绉绣机花样展示

QUILTING AND EMBROIDERY QUILTING SAMPLES

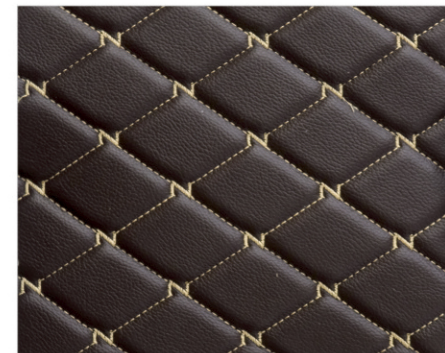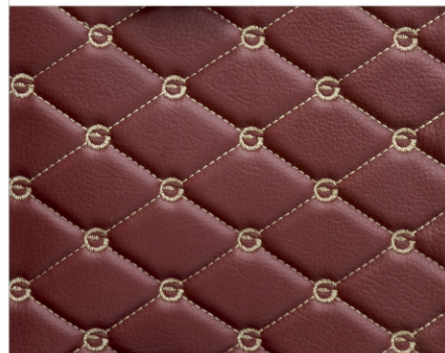

一直被模仿，从未被超越
Always imitated, Never surpassed

东莞市钰腾机械科技有限公司 DONGGUAN YUTENG MACHINERY TECHNOLOGY CO.,LTD.

地址：广东省东莞市道滘镇大罗沙创业园八路1号
电话：0769-2863 8818
传真：0769-2863 8828
业务咨询：139 2926 2216
售后服务：138 2913 0089
投诉监督：139 2296 0565
E-mail: sale@dgytjx.com

ADD: No.1, 8th Road, Chuangye Park, Daluocha, Daojiao Town,
Dongguan City, Guangdong Province, China
TEL: +86-769-2863 8818
FAX: +86-769-2863 8828

Inquiry After-service:

Mobile: +86 139 2926 2216
Whatsapp/Wechat: +86 139 2926 2216
E-mail: sale@dgytjx.com



Website



Wechat



Whatsapp

<http://www.dgytjx.com>

<http://www.yutengmachine.com>