

# DoGain

High Power Diode Lasers Bars, 1064 nm, 50W CW

1064nm 50W 高功率巴条激光芯片


DG-UMB-30-19-1064-TE-50-1.0

性能参数 Performance Parameters	符号 Symbol	最小值 Minimum	典型值 Typical	最大值 Maximum	单位 Unit
<b>Operation</b>					
输出功率 Optical output power	Po	50			W
中心波长 Wavelength (cw)	$\lambda_c$	1050	1060	1070	nm
工作模式 Operation mode			CW		
<b>Geometrical</b>					
发光单元数 Number of Emitters			19		
发光区宽度 Emission region width	E.W.	145	150	155	μm
发光点周期 Emitter Pitch	P	500			μm
填充因子 Filling Factor	F	30			%
巴条长度 Bar Width	B	9800	10000	10200	μm
腔长 Cavity length	L	980	1000	1020	μm
厚度 Thickness	D	105	115	125	μm
<b>Electro Optical Data</b>					
电光转换效率 Electro-optic conversion efficiency	$\eta_c$	61	66		%
斜率效率 Slope efficiency	SE	1.0	1.1		W/A
阈值电流 Threshold current	Ith	4	6		A
工作电流 Operating current	Iop	50	53		A
工作电压 Operating voltage	Vop	1.5	1.6		V
光谱宽度 (FWHM) Spectral width	$\Delta\lambda$	3.5	4.5		nm
波长温度系数 Wavelength tuning vs. temperature	$\Delta\lambda/\Delta T$	0.3			nm/°C
垂直远场发散角 (FWHM) Vertical F.F. divergence angle	$\theta_{\perp}$	35			Deg
水平远场发散角 (FWHM) Horizontal F.F. divergence angle	$\theta_{//}$	7			Deg

备注：本参数为产品进行MCC封装，CW电流模式，导热板25°C下条件下的测试参数。

Note: These parameters were obtained by testing MCC packaged products in the CW mode at 25°C.

◆ Power-Current-Voltage-Efficiency

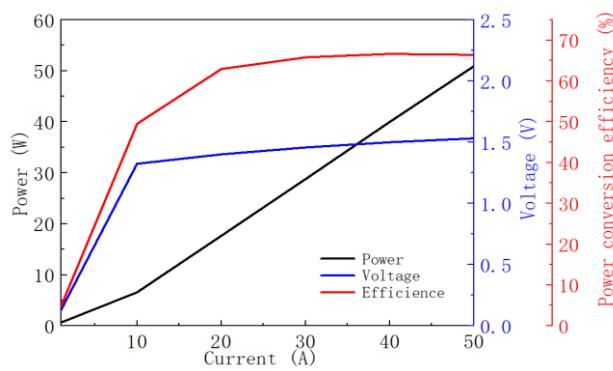

◆ Spectral characteristics

