



**AUTOMATIC
SENSOR TOILET
FLUSH VALVE**







107.0822

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor + Touchpad activation
- LED display
- SS 304 anti-fingerprint panel, high grade chrome plating frame
- AC100-240V power supply only
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

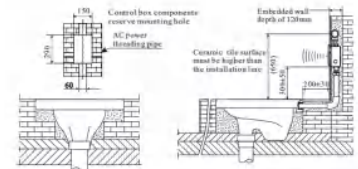

107.0823

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor + Touchpad activation
- LED display
- Black tempered glass magnetic panel, high grade chrome plating frame
- AC100-240V power supply only
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

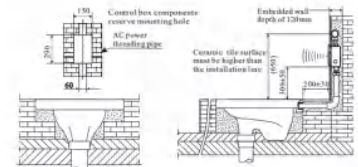

107.0824

AUTOMATIC SENSOR TOILET FLUSH VALVE

- IR Sensor + Touchpad activation
- Black tempered glass magnetic panel, high grade chrome plating frame
- Power supply AC100-240V/DC 6V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

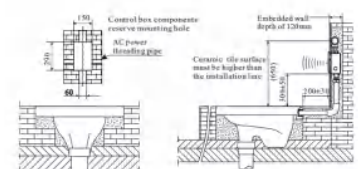



107.0825

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor + Touchpad activation
- High grade sandblasted panel, high grade chrome plating frame
- Power supply AC100-240V/DC 6V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

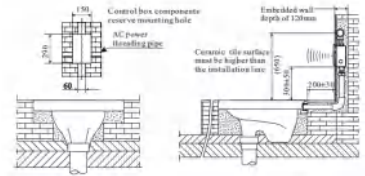



107.0826

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor activation
- SS 304 anti-fingerprint panel, high grade chrome plating frame
- Power supply AC100-240V/DC 6V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

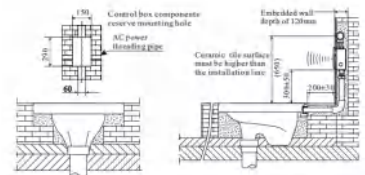



107.0827

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor + Button activation
- SS 304 anti-fingerprint panel, high grade chrome plating frame
- Power supply AC100-240V/DC 6V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

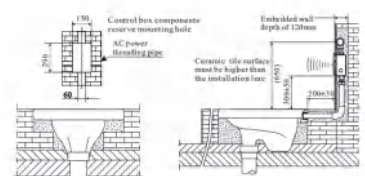





107.0801

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor + Button activation
- SS 304 anti-fingerprint panel
- Eco Power supply DC 3.6V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.05 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm - automatic
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

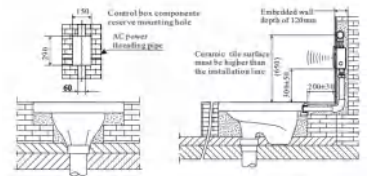

107.0806

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor + mechanical button activation
- LED display
- Black tempered glass magnetic panel, SS 304 mirror frame
- Power supply AC100-240V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

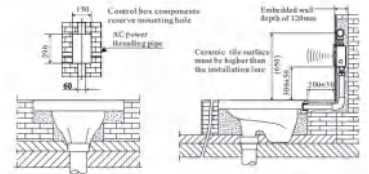

107.0805

AUTOMATIC SENSOR TOILET FLUSH VALVE

- IR Sensor + mechanical button activation
- Black tempered glass magnetic panel, SS 304 mirror frame
- Power supply AC100-240V/DC 6V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

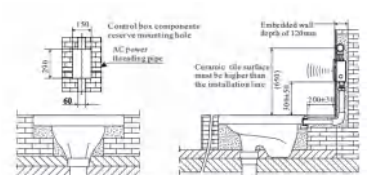





107.0807

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor activation
- Black tempered glass magnetic panel, SS 304 mirror frame
- Power supply AC100-240V/DC 6V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

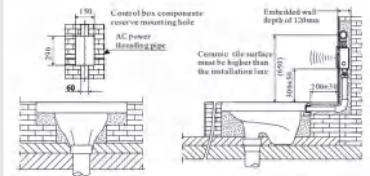

107.0820

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor + mechanical button activation
- Black tempered glass magnetic panel, aluminum-alloy frame
- Power supply AC100-240V/DC 6V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

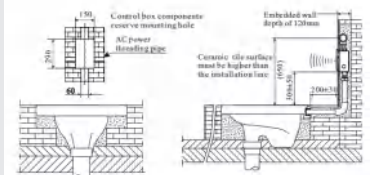

107.0803

AUTOMATIC SENSOR TOILET FLUSH VALVE

- IR Sensor activation
- SS 304 Stainless steel mirror panel, High grade chrome plating frame
- Power supply AC100-240V/DC 6V
- Anti-mirror or stainless steel strong reflection
- Water pressure 0.30 MPa – 0.80 MPa
- Water temperature 1-65 C
- Sensing distance 80 cm - automatic adjustment
- G1" Water inlet connection
- Certification CE certificate
ROHS certificate

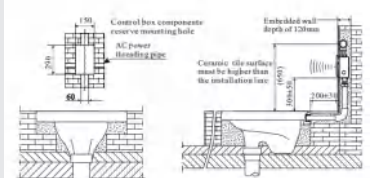

107.0804

AUTOMATIC SENSOR TOILET FLUSH VALVE



- IR Sensor activation
 - SS 304 Stainless steel mirror panel, High grade chrome plating frame
 - Power supply AC100-240V/DC 6V
 - Anti-mirror or stainless steel strong reflection
 - Water pressure 0.30 MPa – 0.80 MPa
 - Water temperature 1-65 C
 - Sensing distance 80 cm - automatic adjustment
 - G1" Water inlet connection
- Certification CE certificate
ROHS certificate

