


Centrifuge

New centrifuge with 4 quick set buttons

ISO 9001/13485 CERTIFIED CE  FC

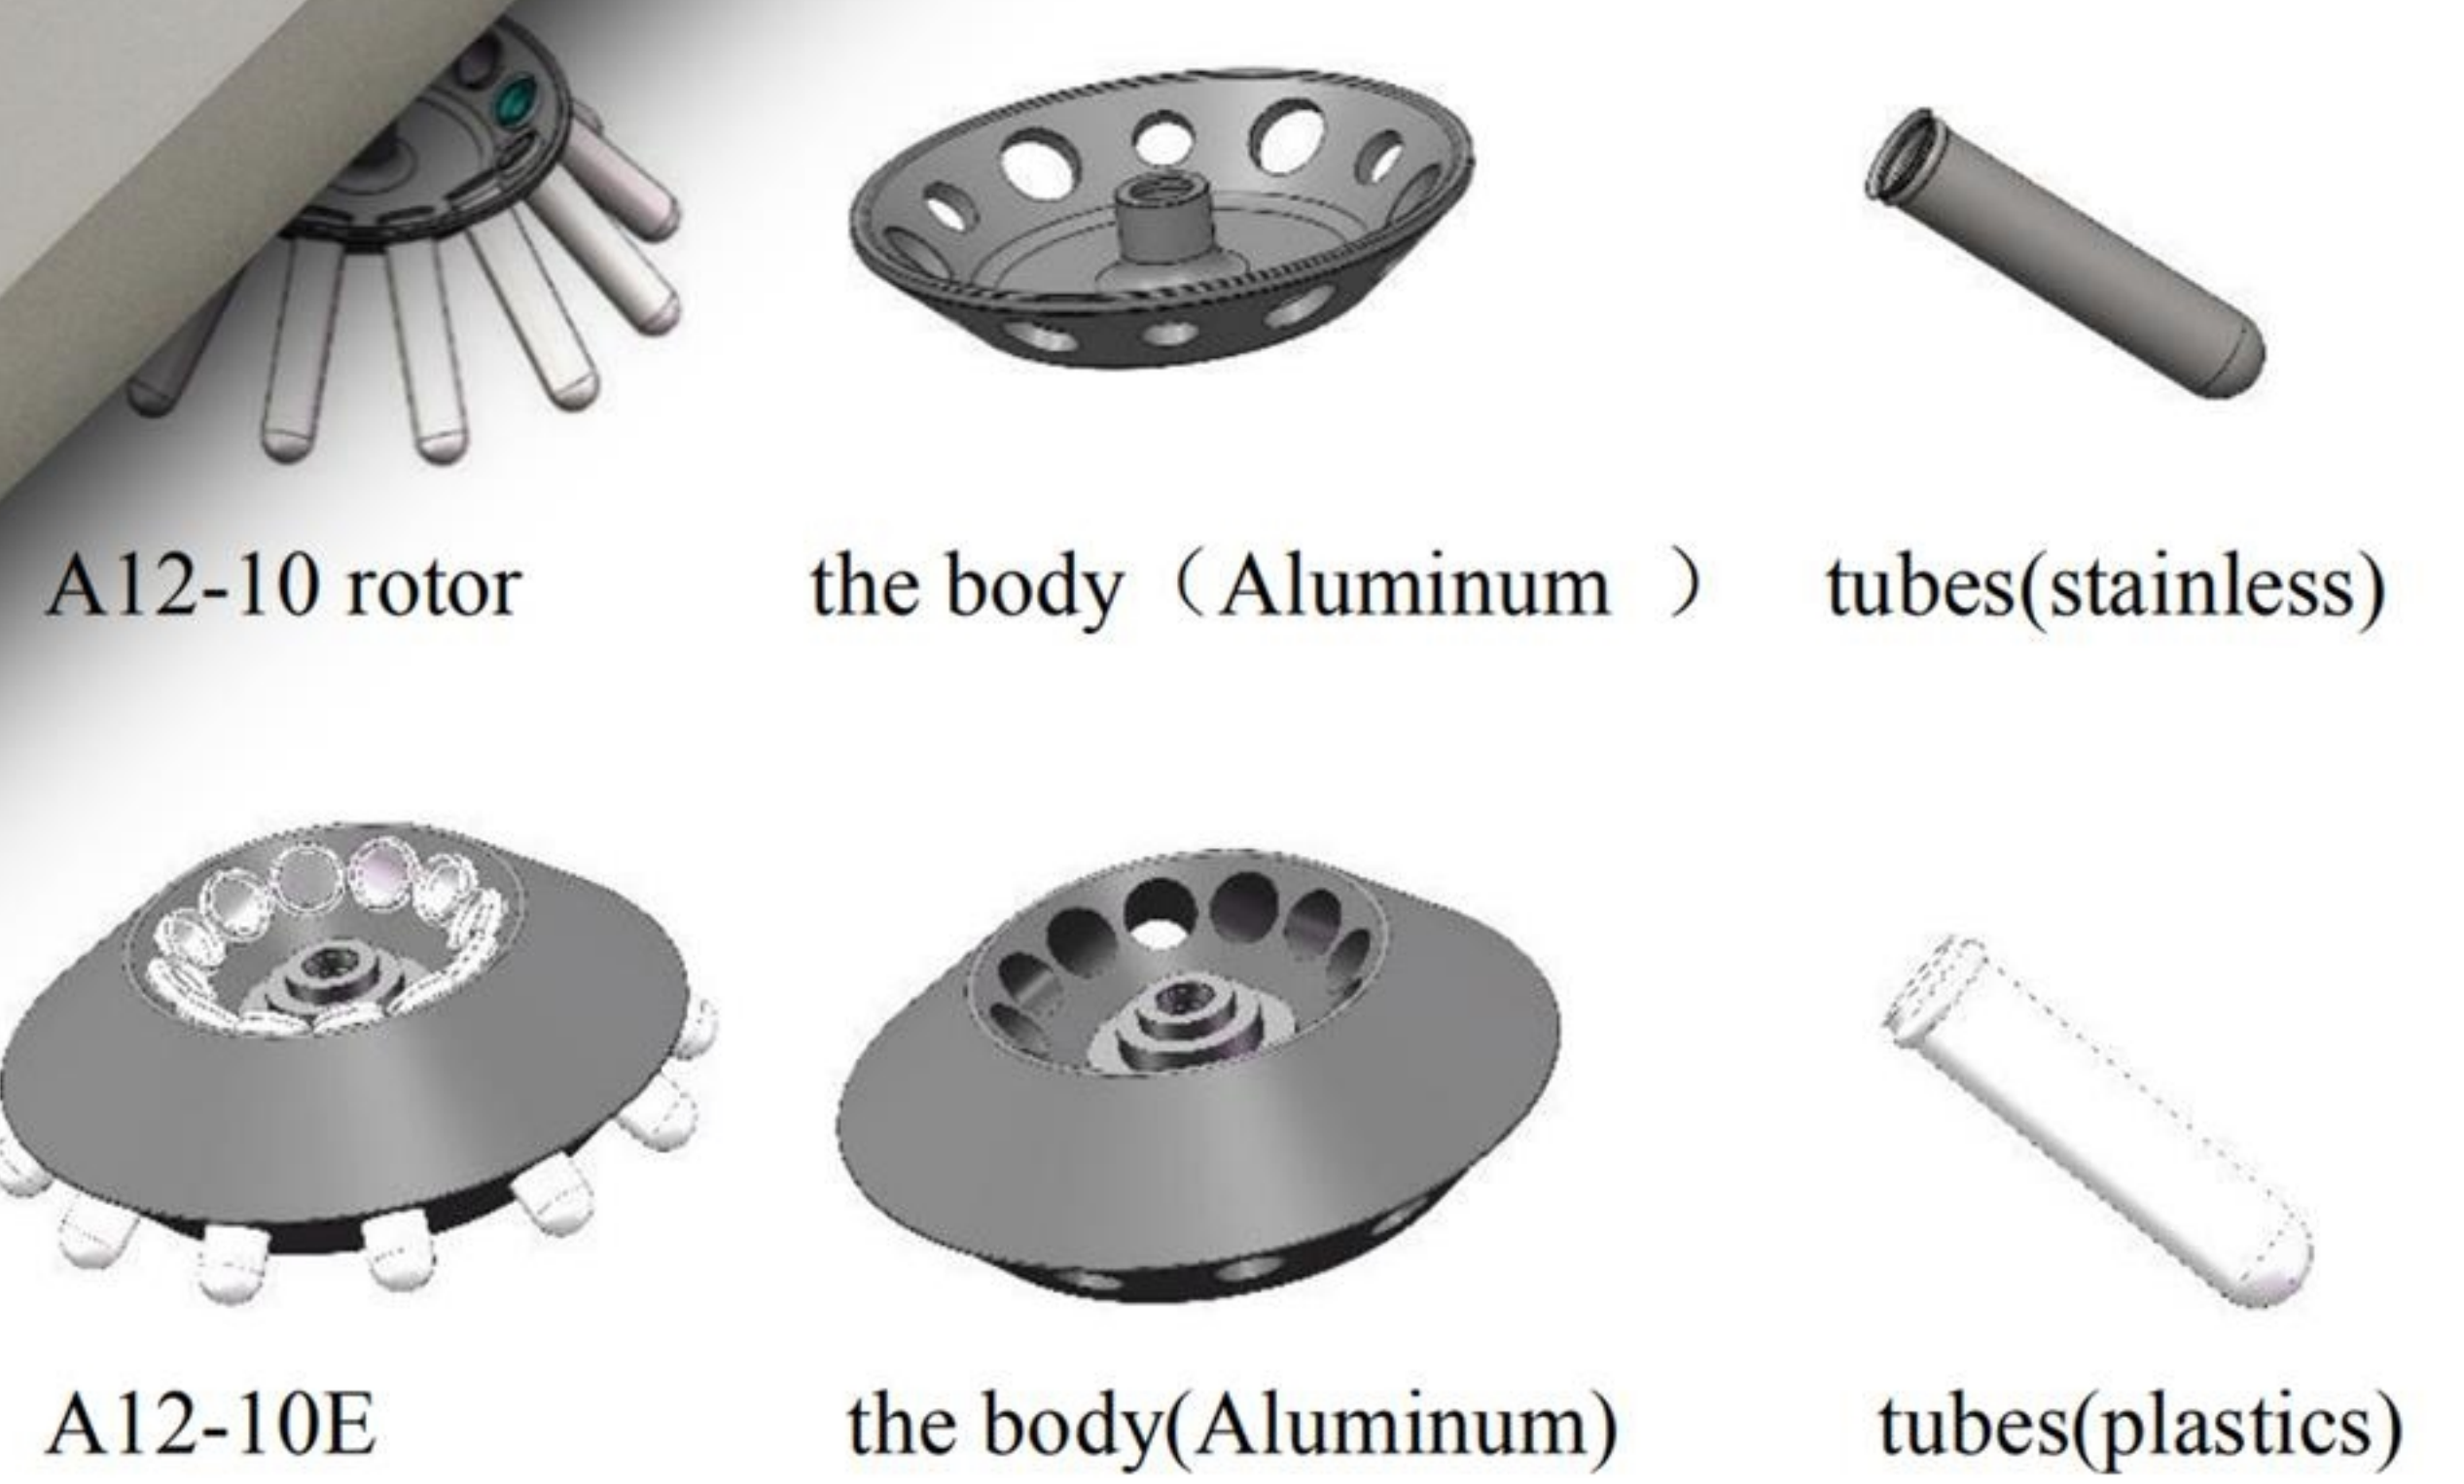

A12-10 rotor

the body (Aluminum)

tubes(stainless)

A12-10E

the body(Aluminum)

tubes(plastics)

Centrifuge

WWW.XYSCALE.COM

Model	LH4050	LL4050	CL4015	DL4015	BL4015
Application	Laboratory		Clinical	Dental Regenerative	Beauty Area
Speed Range(rpm)	300-14000		300-4000		
Capacity	50ml	50ml	15ml	15ml	15ml
Rotor	A12-10	A12-10	A12-10	A12-10	A12-10
	A12-10E	A12-10E	A12-10E	A12-10E	A12-10E
		A6-50P			
Ambient Condition					
Set up site	Indoor Only				
Altitude	Up to 2000m above sea level				
Ambient Temperature	2~40°C				
Humidity	80%				
Excess voltage category	II				
Pollution degree	2				
Device protection class	I				
Dimensions (mm)	292(L)X405(D)X226(H)				
Weight	9kg				
Additional features	Speed/RCF switch, Processing display, Voice reminder				
Speed accuracy	±20rpm				
Max RCF	16400×g, step:100×g		2000×gX10×g		
Rotor	Rotor name		ID	Max speed	
	A6-50P: 50ml×6/15ml×6		1#	4500rpm(2500×g)	
	A18-2P:2ml×18		8#	14000rpm(16400×g)	
Timer	10second ~ 99minutes				
Program number	9				
Safety devices	Door interlock, Over-speed detector, Over temperature protection				
Power requirements	Single phase, 110V-240V, 50/60 Hz, 3A				

