
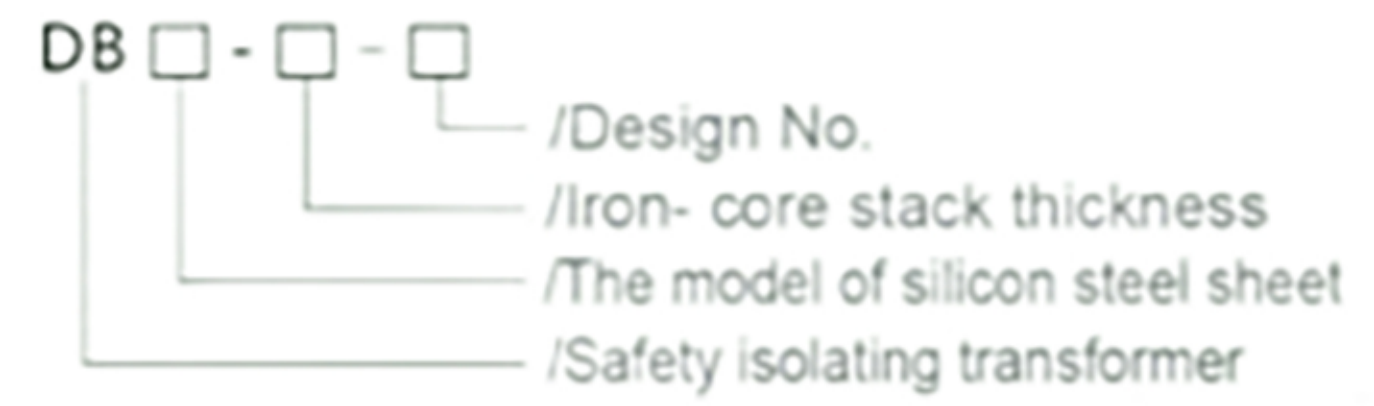


# LOW FREQUENCY EI TYPE ENCAPSULATED TRANSFORMER

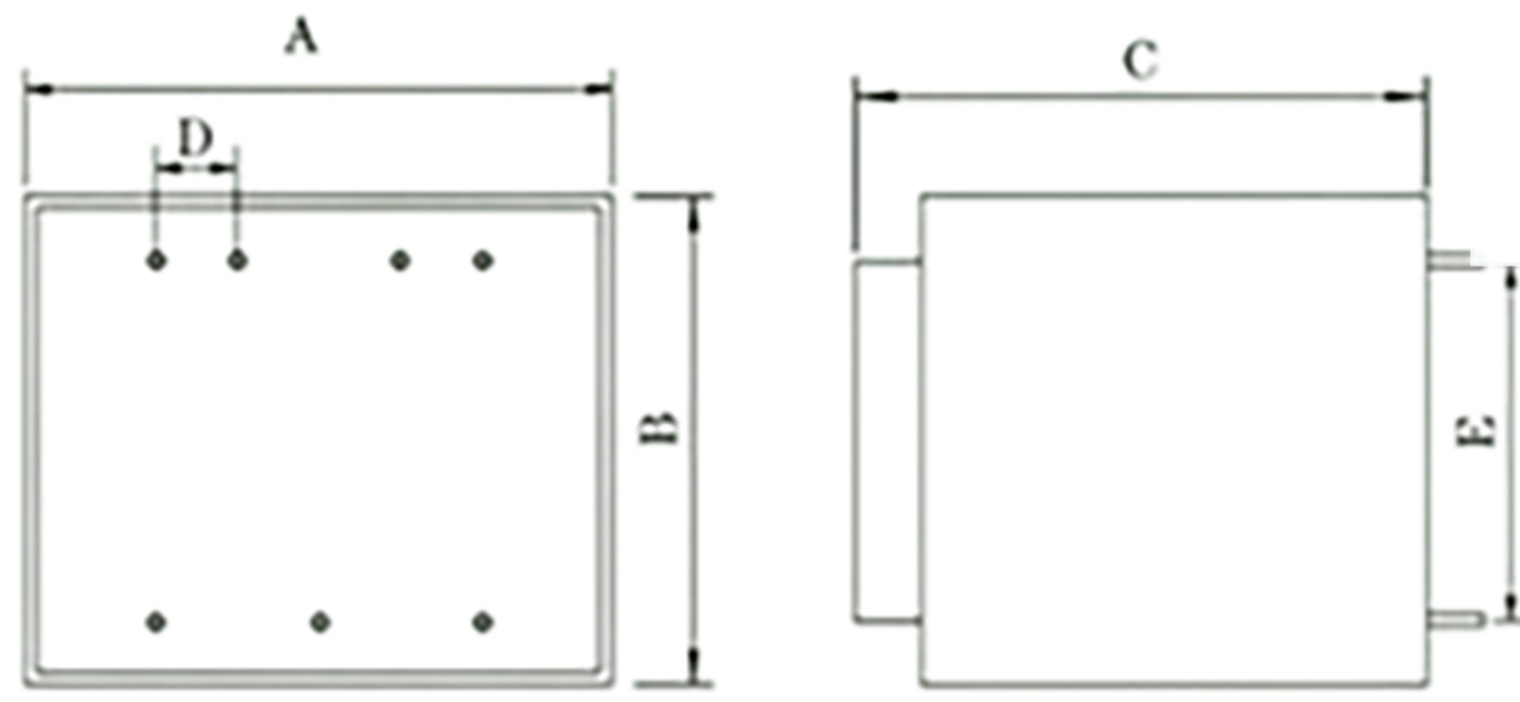

OG ITEM NO	Bobbin(mm)	A×B×C(mm) Overall Dimension	Pin Distance (mm)	Array Distance (mm)	Power(W)
OG-EI3005	30*5	32.8*27.8*15.2	5	20	0.5
OG-EI3005	30*5	32.8*27.8*15.2	5	20	0.6
OG-EI3011	30*10.5	32.8*27.8*21.8	5	20	1.2
OG-EI3011	30*10.5	32.8*27.8*21.8	5	20	1.5
OG-EI3011	30*10.5	32.8*27.8*21.8	5	20	1.8
OG-EI3013	30*12.5	32.8*27.8*24	5	20	1.5
OG-EI3013	30*12.5	32.8*27.8*24	5	20	1.8
OG-EI3016	30*15.5	32.8*27.8*26.9	5	20	2.0
OG-EI3016	30*15.5	32.8*27.8*26.9	5	20	2.4
OG-EI3018	30*18	32.8*27.8*29.5	5	20	2.3
OG-EI3018	30*18	32.8*27.8*29.5	5	20	2.8
OG-EI3023	30*23	32.8*27.8*34.8	5	20	2.8
OG-EI3023	30*23	32.8*27.8*34.8	5	20	3.2
OG-EI3814	38*13.6	41*34.8*27.8	5	25	3.5
OG-EI3814	38*13.6	41*34.8*27.8	5	25	4.5
OG-E14215	42*14.8	45*38.1*32.8	5	25	5.0
OG-E14215	42*14.8	45*38.1*32.8	5	25	6.0
OG-EI4817	48*16.8	51.3*43.3*35.3	5	27.5	8.0
OG-EI4817	48*16.8	51.3*43.3*35.3	5	27.5	10.0
OG-E14821	48*20.5	51.3*43.3*39	5	27.5	10.0
OG-E14821	48*20.5	51.3*43.3*39	5	27.5	12.0
OG-EI5419	54*18.8	57.4*48.2*38.9	5	30	13.0
OG-EI5419	54*18.8	57.4*48.2*38.9	5	30	16.0
OG-EI6021	60*21	63.6*53.6*44.6	5	32.5	20.0
OG-EI6021	60*21	63.6*53.6*44.6	5	32.5	25.0
OG-EI6031	60*31	82*53.5*54.2	5	32.5	30.0
OG-EI6031	60*31	82*53.5*54.2	5	32.5	35.0