
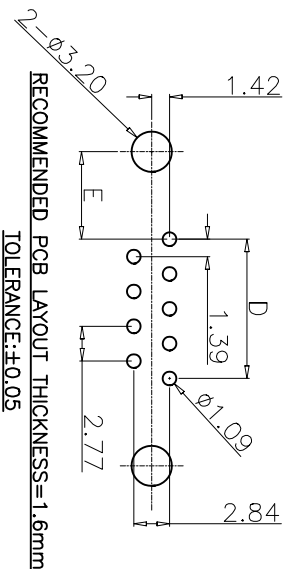
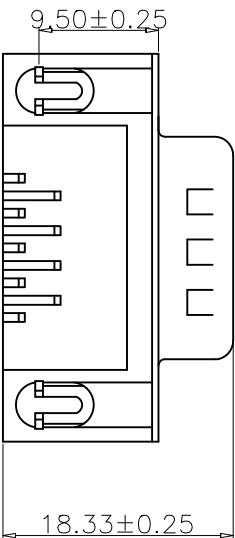


RoHS Compliant

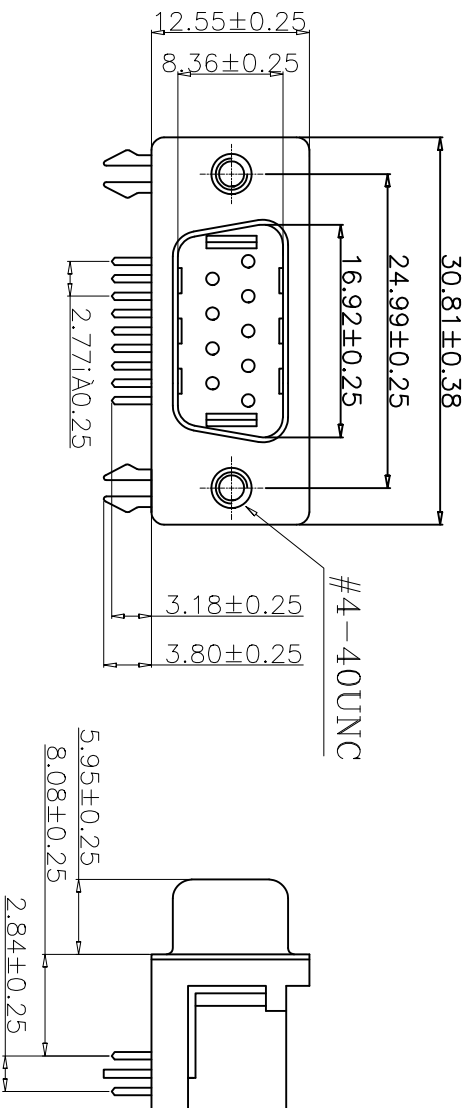

REV.	ECN NO.	DESCRIPTION	REVISER	DATE
A0		变更料号	FAN SHA	09-07-20
A1		整理更换图框	Lijuan Yang	11-11-24

NOTE:

- MATERIALS AND FINISHED INSULATOR : PBT+30% GF UL 94V-0, SHELL : STEEL, NI OR SN FINISHED CONTACT MATERIAL : BRASS, SELEVITE GOLD FINISHED RIVETED INSERT: BRASS MATERIAL ,TIN FINISHED WITH #4-40 THREADED ASSEMBLED
- ELECTRICAL CHARACTERISTICS
CURRENT RATING : 1.0 AMP DC
VOLTAGE RATING: 300 V DC
CONTACT RESISTANCE :20 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC MIN.
INSULATION RESISTANCE : 1000 MEGAOHMS MIN.
- ENVIRONMENTAL
OPERATING TEMPERATURE: -55°C ~ +85°C
STORAGE TEMPERATURE:-55°C ~ +105°C
4.HOW TO ORDER:

DR M 1 3 1-09 X X X X P-A 0 1 1 0

MALE

09:9PIN

G:Gold Plating
S:Selevite Gold Bright TIN

1:1u"
2:2u"
3:3u"

4.FULL Gold
5.FULL NI
A:No screw type
B:Ass'y screw type
C:Attach screw type
D:Fork Lock
P:PBT
B:Black
L:LIGHT Blue
U:Dark Blue(661C)

?? (Scale):1:1 ?? (DWG NO.)C-DRM131-05

?? (Unit):mm ?? (Design) Lijuan Yang

?? (Checked)

?? (Approved)

?? (Sheet) 1 OF 1

?? (Rev.):A1

深圳扬讯电子有限公司

DR 9公8.08插板, 铆合铁鱼

DRM131-09XXXXXP-A0110