

Product Description

LF-GLD035YE is a 35W isolated constant current 0-10V/PWM/Rx dimmable LED driver. Its rated input voltage ranges from 200 to 264Vac; output voltage from 25 to 42Vdc and output current has 5 options from 600 to 800mA, including 600mA, 650mA, 700mA, 750mA and 800mA.

Features


- 0-10V/PWM/Rx dimmable
- IP20
- Suitable for Class I light fixtures
- Isolated design
- AC220-240V; metal casing
- Flicker free
- 5-year warranty (please refer to the warranty condition)



Applications

- Indoor office lighting
- Residential lighting
- Commercial lighting

Product Naming

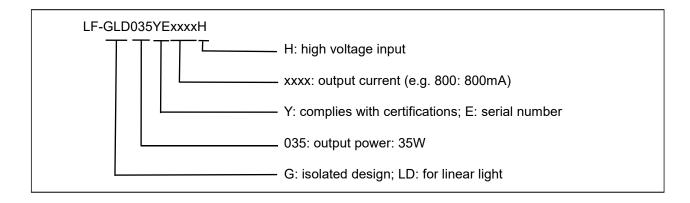



Electrical Characteristics

| Model | | | LF-GLD035YExxxxH | | | | | |
|-------------------------------|---|--|------------------|-----|-----|-------|-------|--|
| Output | Output Voltage | 25-42Vdc | | | | | | |
| | Output Current | 600mA | 650mA | 700 | DmA | 750mA | 800mA | |
| | Flicker Index | <0.5% | | | | | | |
| | Ripple Current | <2% | | | | | | |
| | Current Tolerance | ±5% | | | | | | |
| | Temperature Drift | ±10% | | | | | | |
| | Start-up Time | <0.5S | | | | | | |
| | Input Voltage | 220-240Vac (voltage limit: 200-264Vac) | | | | | | |
| | Input Frequency | 50/60Hz | | | | | | |
| | Input Current | 0.2A max. | | | | | | |
| - | Power Factor | ≥0.9 | | | | | | |
| | THD | ≤20% | | | | | | |
| - | Efficiency | ≥85% | | | | ≥86% | | |
| Input | In-rush Current | ≤58A@15uS@230Vac | | | | | | |
| | Load Quantity a Circuit Breaker can support | Circuit Breake | er Model | B10 | C10 | B16 | C16 | |
| | | Quantity (pcs) |) | 17 | 29 | 28 | 47 | |
| - | Leakage Current | <0.7mA | | | | | | |
| | Standby Power Consumption | ≤0.5W | | | | | | |
| Protection Characteristics | Open Circuit Protection | <55V | | | | | | |
| | Short Circuit Protection | Hiccup mode (auto-recovery) | | | | | | |




| Environment Descriptions | Working Temperature | -30℃ - +50℃ | | |
|-----------------------------|---|--|--|--|
| | Working Humidity | 20-90%RH (no condensation) | | |
| | Storage Temperature/ Humidity | -40℃ - 80℃ (six months under class I environment); 10-90%RH (no condensation) | | |
| | Atmospheric Pressure | 86-106kPa | | |
| Safety and EMC | Certifications | CE, CB, RCM, SAA, CCC | | |
| | Withstanding Voltage | I/P-O/P: 3.75kV/5mA/60S | | |
| | Insulation Resistance | I/P-O/P: >100MΩ@500Vdc | | |
| | Safety Standard | EN61347-2-13: 2014/A1: 2017, EN61347-1: 2015, EN62493: 2015 | | |
| | EMI | EN55015, EN61000-3-2, EN61000-3-3 | | |
| | EMS | EN61000-4-2, 3, 4, 5 (lightning strike L-N: 1kV, L/N-PG: 2kV), 6, 11 | | |
| | IP Rating | IP20 | | |
| Others | RoHS | RoHS 2.0 (EU) 2015/863 | | |
| | Warranty | 5 years (Tc≤72℃) | | |
| | 1. It is recommended that customer should install over voltage and under voltage protection devices and surge protection devices to ensure safety before connecting to electricity. | | | |
| Remarks | 2. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer re-confirms the EMC of the whole LED light fixture. | | | |
| | 3. The test conditions of the circuit breaker configuration quantity is the same as that of the in-rush current test. | | | |
| | 4. Unless otherwise stated, the parameters of the power factor, harmonic and efficiency were test results under the ambient temperature of 25℃, humidity of 50%, input voltage of 230Vac and full load. | | | |




Product Characteristic Curves


PF Curve

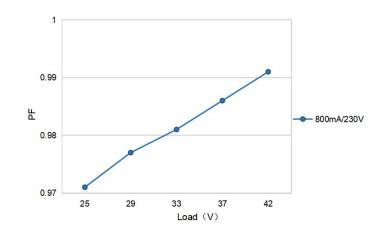

Efficiency Curve

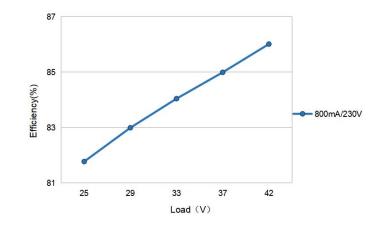

Lifetime Curve

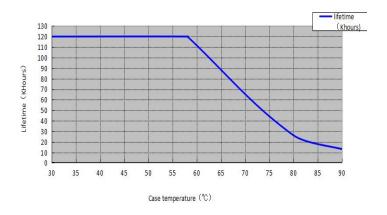

4

Dimming Operation Instructions

Terminal Definitions

INPUT


| AC-L (gray terminal) | AC live wire input | | |
|----------------------|-----------------------|--|--|
| AC-L (gray terminal) | AC live wire input | | |
| AC-N (gray terminal) | AC neutral wire input | | |
| AC-N (gray terminal) | AC neutral wire input | | |
|) (gray terminal) | Earth wire | | |

OUTPUT

| LED+ (red terminal) | Positive electrode output of LED driver |
|-----------------------|---|
| LED- (black terminal) | Negative electrode output of LED driver |
| DIM+ (black terminal) | 0-10V/PWM/Rx dimming |
| DIM- (green terminal) | |


■ 0-10V/PWM/Rx Dimming Operation Instructions

- Connect 0-10V, PWM and Rx signals to DIM terminal.
- In 0-10V dimming mode, when the input voltage <0.3V±0.1V, the light turns off, when it's >0.5±0.1V, the light turns on.
- Min. dimming depth of 0.5-10V: 10%
- PWM dimming depth: 10%
- PWM compatible signal: 400-3000(Hz); amplitude: 10(V)
- Rx dimming depth: 10%
- DIM+/- (without signal connected): 100% rated current output

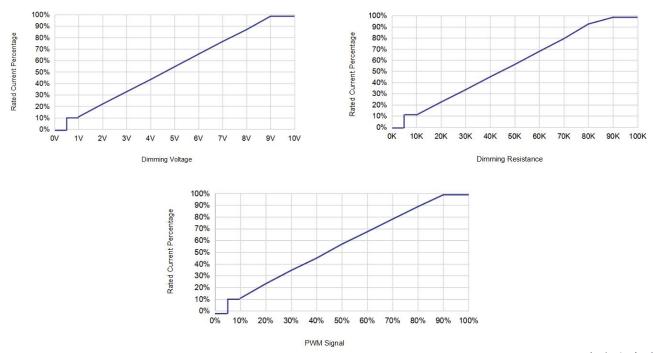



Structure & Dimensions (unit: mm)

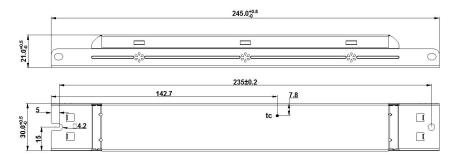

Package Specifications

| Model | LF-GLD035YExxxxH |
|-------------|---------------------------------------|
| Carton Size | 385*285*210 mm (L*W*H) |
| Quantity | 8 pcs/layer; 6 layers/ctn; 48 pcs/ctn |
| Weight | 0.16 kg/pc; 8.68 kg/ctn |

Transportation & Storage

- Transportation
 - Suitable transportation means: vehicles, boats and aircraft.
 - During transportation, there should be awnings for rain protection and sun protection. Civilized loading and unloading are required. There should be no severe vibration or impact.
- Storage
 - Storage in accordance with the provisions of the Class I environment. For products which have been stored for more than six months, they mustn't be used until they pass the re-inspection.

Attention

- Please use this product according to its specifications otherwise there may be malfunction.
- Use light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.