



LG175

Powered by Cummins

Model	Frequency/RPM	Standby Power	Prime Power
LG175	60HZ/1800RPM	140KW	128KW
		175KVA	160KVA

* Voltages: 127/220


- (1) Prime Power: Ratings are as per DIN 6271, BS55114 and ISO-3046 with 10% overload capacity.
(2) Standby Power: Power available at variable load for up to a max. of 500 hours during one year of which 300 hours may be for continuous use.
(3) Operation at Altitude $\leq 1000\text{m}$, Ambient temperature $\leq 40^{\circ}\text{C}$. If altitude higher than 1000m, each 300m will cause additional de-rating 4%.

General Characteristics

Model	LG175
Engine	Cummins 6BTAA5.9-G12
Alternator (交流发电机)	UC1274E
Speed Control Type (转速控制方式)	Electrical
Phase(相数)	3
System Voltage (系统电压)	24
Frequency (频率)	60HZ
Engine Sped(RPM)	1800
Controller Model (控制器型号)	

Dimensions

DIMENSION	OPEN TYPE	SILENT TYPE
Length (L)	2400mm	3200mm
Width (W)	925mm	1080mm
Height (H)	1555mm	2000mm
Net Weight (KG)	1390kg	2010kg

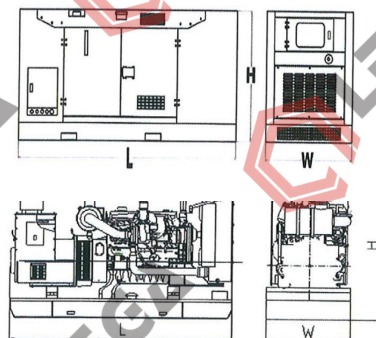

Engine Specification		
Brand	DONG FENG CUMMINS	
Model	6BTAA5.9-G12	
No. of Cylinders and Cycle	6	
Compression Ratio	17.3:1	
Displacement (L)	5.9	
Bore x Stroke (mm)	102*120	
Piston Speed (m/s)	7.2	
Air Intake Flow (L/s)	182	
Exhaust Flow (L/s)	398	
Net Engine Weight (kg)	413	
Starting System		
Engine Coolant Flow (L/s)	2	
Base Output Power (kW)	150	
Fuel Consumption (L/h)	110% load	42
	100% load	38
	75% load	28
	50% load	19
Cooling System	Max.coolant cycling resistance exterior engine(kPA)	35
	Thermostat adjusting temperature (°C)	82-95
	Minimum Pressure of Radiator Cap (kPA)	69
	Coolant capacity-engine only(L)	10
Fuel System	Fuel injection pump model	BYC P7100泵
	Maximum Restriction at Lift Pump (kPa)	13.6
	Maximum Fuel Inlet Temperature (°C)	
	Total Drain Flow (constant for all loads) (L/h)	30
Lubricating System	Low idle (kPa)	207
	Rated speed (kPa)	345
	Max. oil temperature permitted in oil pan (°C)	121
	Lubrication system Min. capacity (L)	16.4
Exhaust System	Max. Back Pressure (KPA)	10
Electrical System	Starter (V)	24
	Battery charging system (A)	40

Alternator Specification		
Poles (极数)	No.	4
Connection type (standard) (连接方式 (标准))		Parallel Star
Insulation (绝缘等级)		Class" H" (等级h)
Enclosure (according IEC-34-5)		IP23
Exciter system (励磁系统)		Self-excited, brushless (自励, 无刷)
Voltage regulator (电压调节)		A.V.R. (Electronic) (电源稳压器 (电子))
Bracket type (托架类型)		Single bearing (单轴承)
Coupling system (耦合系统)		Flexible disc (软磁盘)
Coating type (涂层类型)		Standard (Vacuum impregnation) (标准 (真

*Alternator meets BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2 and AS1359.

Options

Engine

- Jacket Water Preheater
- Oil Preheater

Generator Sets

- Tools with the machine

Fuel System

- Low fuel level alarm
- Automatic fuel feeding system
- Fuel T-valves

Control Panel

- Remote control panel
- ATS
- Remote controller
- Synchronizing controller

Alternator

- Winding temperature measuring instrument
- Alternator Preheater
- Anti-damp and anti-corrosion treatment
- Anti-condensation heater

Canopy

- Rental type canopy
- Trailer

Exhaust System

- Protection board from heat

Cooling System

- Front heat protection
- Coolant (-30°C)

Lubricating System

- With machine oil

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your

Standard Controller (ComAp AMF20 or DEEPSEA DSE6020)

Control	Auto/Start/Stop Control Emergency Stop Pushbutton/ Alarm Engine Cool Down Timer Warm - up Timer Load Switching Timer Engine Cycle Crank	
Indications	Operating Hours 3 Phase Generator Voltage Sensing & Monitoring Current Protection & Monitoring Power Measurement (kW, kVA, kVA _r , kWh, kVAh, pf) Frequency Monitoring (Hz) Oil Pressure/Coolant Temperature/Fuel Level Monitoring Battery Voltage Monitoring (DC) Alarm (Acknowledge)	
Warning & Shutdown Alarms	Generator Over/Under Voltage & Frequency Crank Disconnect (Failure to Start) Under/Over Speed Over Current Low oil pressure High Water Temperature Low Fuel Level Low Water Level	
Features	IP 65 (if ordered with gasket) Basic Scheduler 8 - 35V DC Supply Digital Inputs(4) - Outputs(4 MPU/ 6 CAN) Event Log (5 shutdowns)	

All data is subject to change without notice. Sorry for inform.

Distributed By:

Fujian Everstrong Lega Power Equipments Co., Ltd
 Fuqing Hong Kuan Industry Zone, Fuzhou, Fujian
 Province, China
 Tel: +86-591-8385 3032
 Fax: +86-591-8385 3130
 Email: sales@legapower.com
 Web: www.legapower.com



We are always Available