



LG560P Powered by Perkins

Model	Frequency/RPM	Standby Power	Prime Power
LG560P	60Hz/1800RPM	448KW	408KW
		560KVA	510KVA

* Voltages: 254/440V


- (1) Prime Power: Ratings are as per DIN 6271, BS55114 and ISO-3046 with 10% overload capacity.
- (2) Standby Power: Power available at variable load for up to a max. of 500 hours during one year of which 300 hours may be for continuous use.
- (3) Operation at Altitude \leq 1000m, Ambient temperature \leq 40°C. If altitude higher than 1000m, each 300m will cause additional de-rating 4%.

General Characteristics

Model	LG560P
Engine	Perkins 2506C-E15TAG1
Alternator	Stamford or Lega
Speed Control Type	Electrical
Phase	3
System Voltage	24
Frequency	60Hz
Engine Speed(RPM)	1800

Dimensions

DIMENSION	OPEN TYPE	SILENT TYPE
Length (L)	3450mm	4650mm
Width (W)	1150mm	1400mm
Height (H)	2010mm	2260mm
Net Weight (KG)	3840mm	4870KG

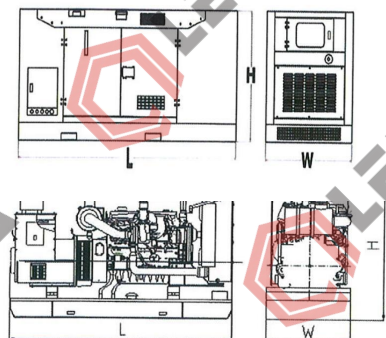

Engine Specification

Brand	Perkins	
Model	2506C-E15TAG1	
No. of Cylinders and Cycle	6L, 4 Stroke	
Compression Ratio	16:01	
Displacement (L)	15.2	
Bore x Stroke (mm)	137 x 171	
Piston Speed (m/s)	10	
Air Intake Flow (m³/min)	34.3	
Exhaust Flow (m³/min)	96	
Net Engine Weight (kg)	1633	
Starting System	Electronic	
Engine Coolant Flow (L/min)	7.2	
Base Output Power (kW)	435	
Fuel Consumption (L/h)	110% load	114
	100% load	100
	75% load	77
	50% load	57

	Minimum Pressure of Radiator Cap (kPa)	70
	Maximum Restriction at Lift Pump (kPa)	550
	Maximum Fuel Inlet Temperature (°C)	55
	Max. oil temperature permitted in oil pan (°C)	114
	Lubrication system Min. capacity (L)	45
Exhaust System	Max. Back Pressure (kPa)	6.8
Electrical System	Starter (V)	24
	Battery charging system (A)	70



Alternator Specification

Poles	No.	4
Connection type (standard)		Series Star
Insulation		Class "H"
Enclosure (according IEC-34-5)		IP23
Exciter system		Self-excited
Voltage regulator		A.V.R. (Electronic)

Bracket type		Single bearing
Coupling system		Flexible disc
Coating type		Standard (Vacuum impregnation)

*Alternator meets BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2 and AS1359.

Options

Engine

- Jacket Water Preheater
- Oil Preheater

Generator Sets

- Tools with the machine

Fuel System

- Low fuel level alarm
- Automatic fuel feeding system
- Fuel T-valves

Control Panel

- Remote control panel
- ATS
- Remote controller
- Synchronizing controller

Alternator

- Winding temperature measuring instrument
- Alternator Preheater
- Anti-damp and anti-corrosion treatment
- Anti-condensation heater

Canopy

- Rental type canopy
- Trailer

Exhaust System

- Protection board from heat

Cooling System

- Front heat protection
- Coolant (-30°C)

Lubricating System

- With machine oil

Note: This drawing is provided for reference only and should not be used for planning installation. Contact your



Standard Controller (ComAp AMF20 or DEESEA DSE6020)

Control

- Auto/Start/Stop Control
- Emergency Stop Pushbutton/ Alarm
- Engine Cool Down Timer
- Warm - up Timer
- Load Switching Timer
- Engine Cycle Crank



Indications	3 Phase Generator Voltage Sensing & Monitoring	AMF IntelliLite 9
	Current Protection & Monitoring	
Warning & Shutdown Alarms	Power Measurement (kW, kVA, kVA _r , kWh, kVAh, pf)	DSE6020
	Frequency Monitoring (Hz)	
	Oil Pressure/Coolant Temperature/Fuel Level Monitoring	
	Battery Voltage Monitoring (DC)	
	Alarm (Acknowledge)	
Features	Generator Over/Under Voltage & Frequency	DSE6020
	Crank Disconnect (Failure to Start)	
	Under/Over Speed	
	Over Current	
	Low oil pressure	
	High Water Temperature	
Features	Low Fuel Level	DSE6020
	Low Water Level	
	IP 65 (if ordered with gasket)	
	Basic Scheduler	
Features	8 - 35V DC Supply	DSE6020
	Digital Inputs(4) - Outputs(4 MPU/ 6 CAN)	
	Event Log (5 shutdowns)	



All data is subject to change without notice. Sorry for inform.



Distributed By:

Fujian Everstrong Lega Power Equipments Co., Ltd
 Fuqing Hong Kuan Industry Zone, Fuzhou, Fujian
 Province, China
 Tel: +86-591-8385 3032
 Fax: +86-591-8385 3130
 Email: sales@legapower.com
 Web: www.legapower.com